







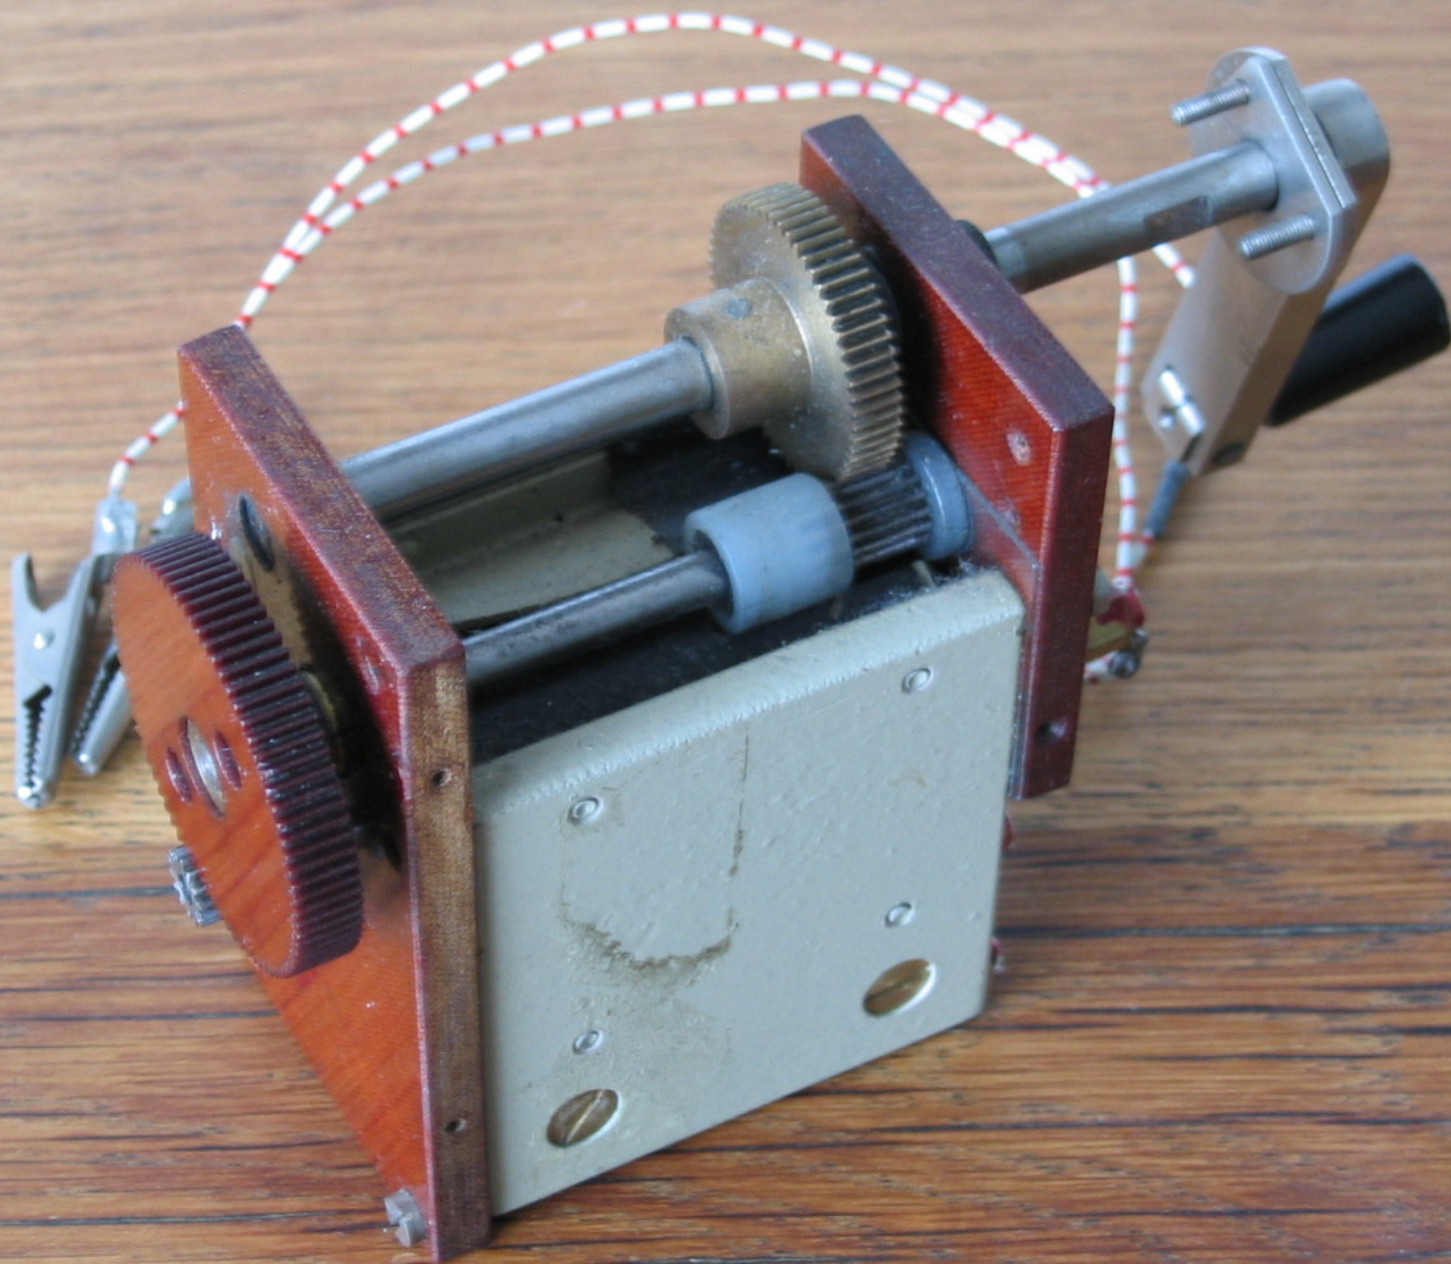

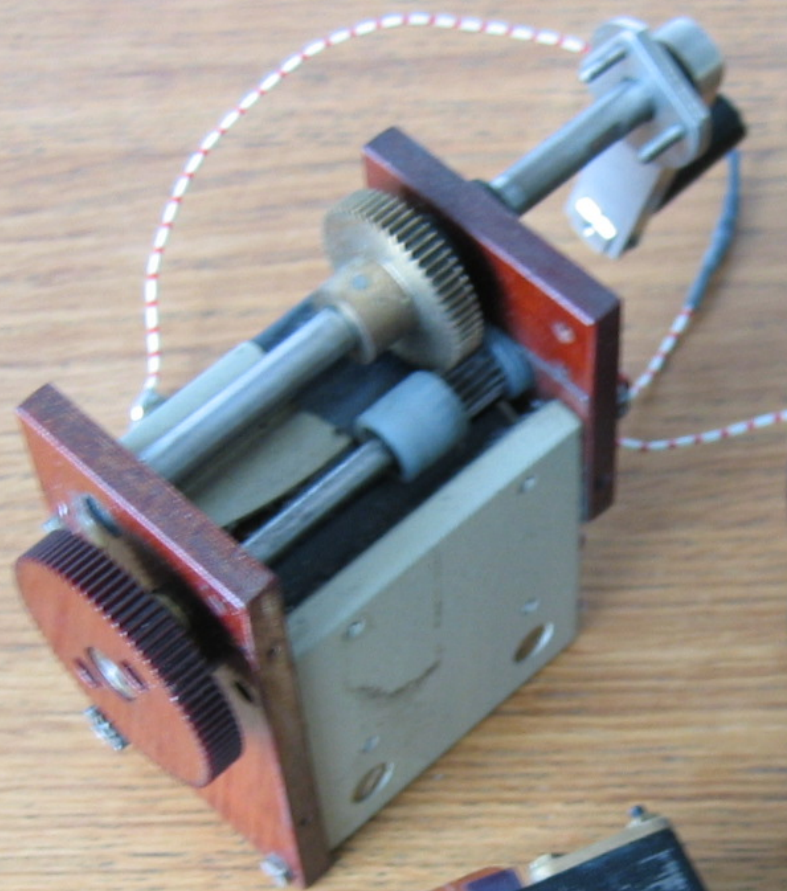


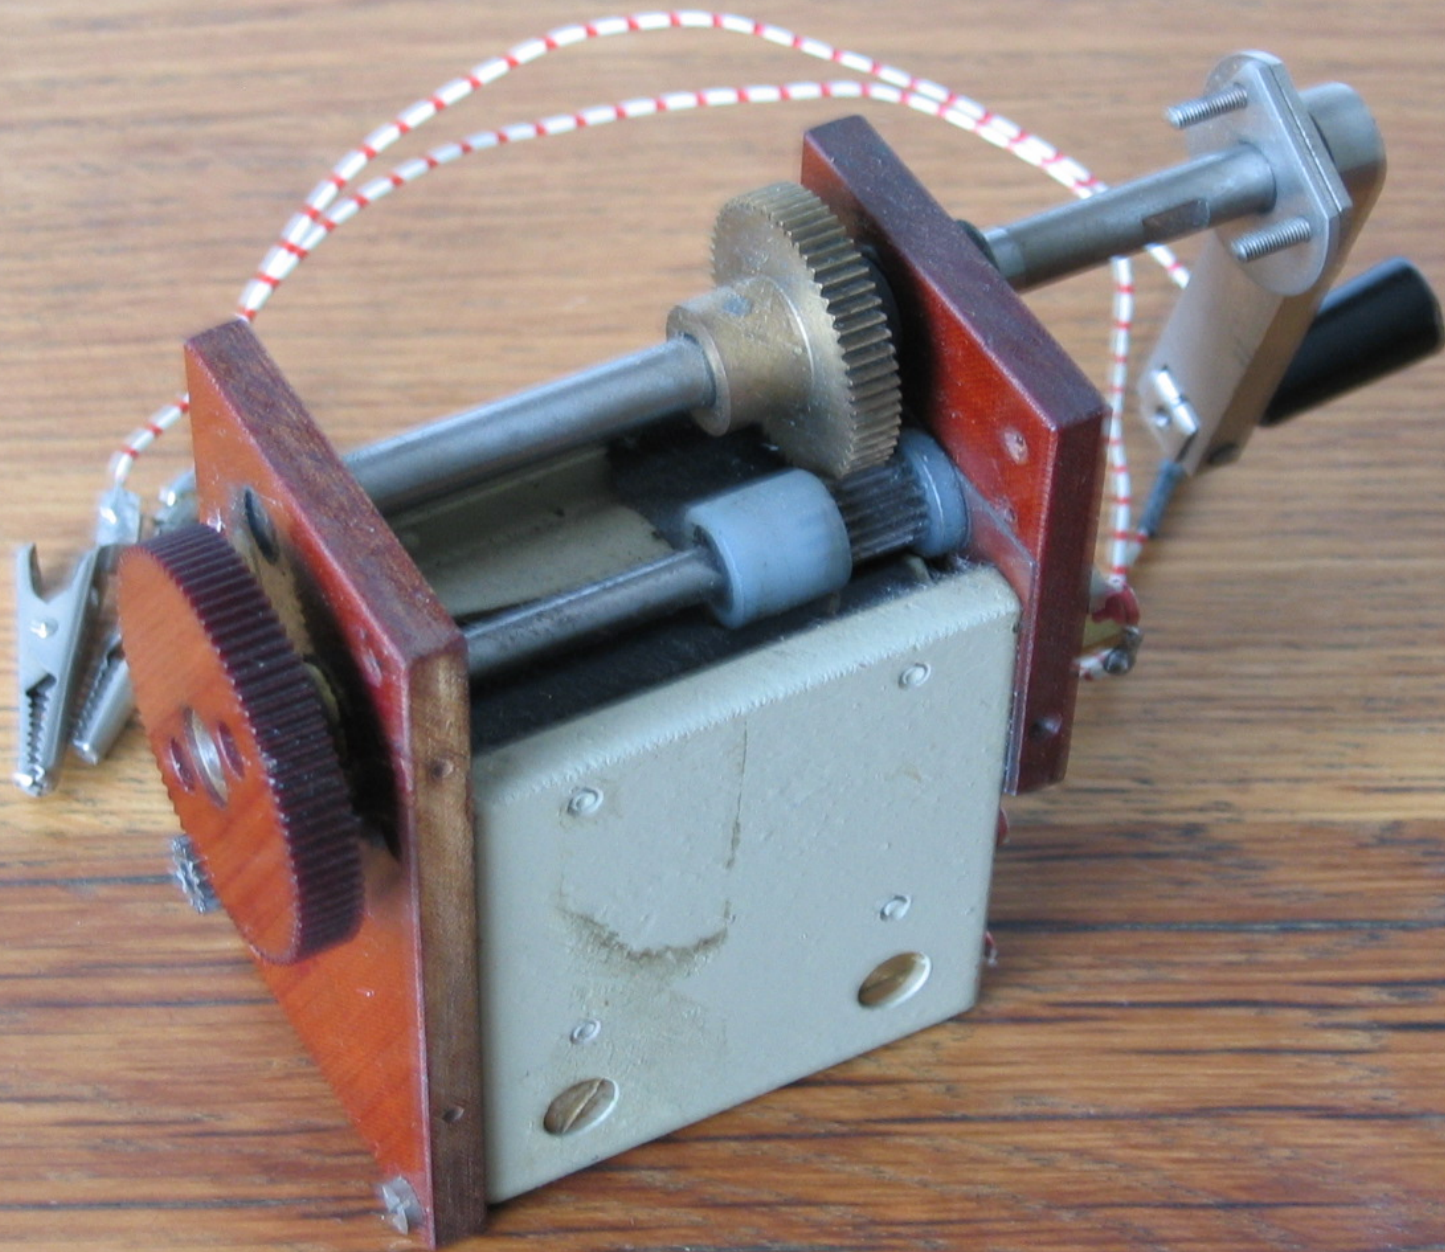

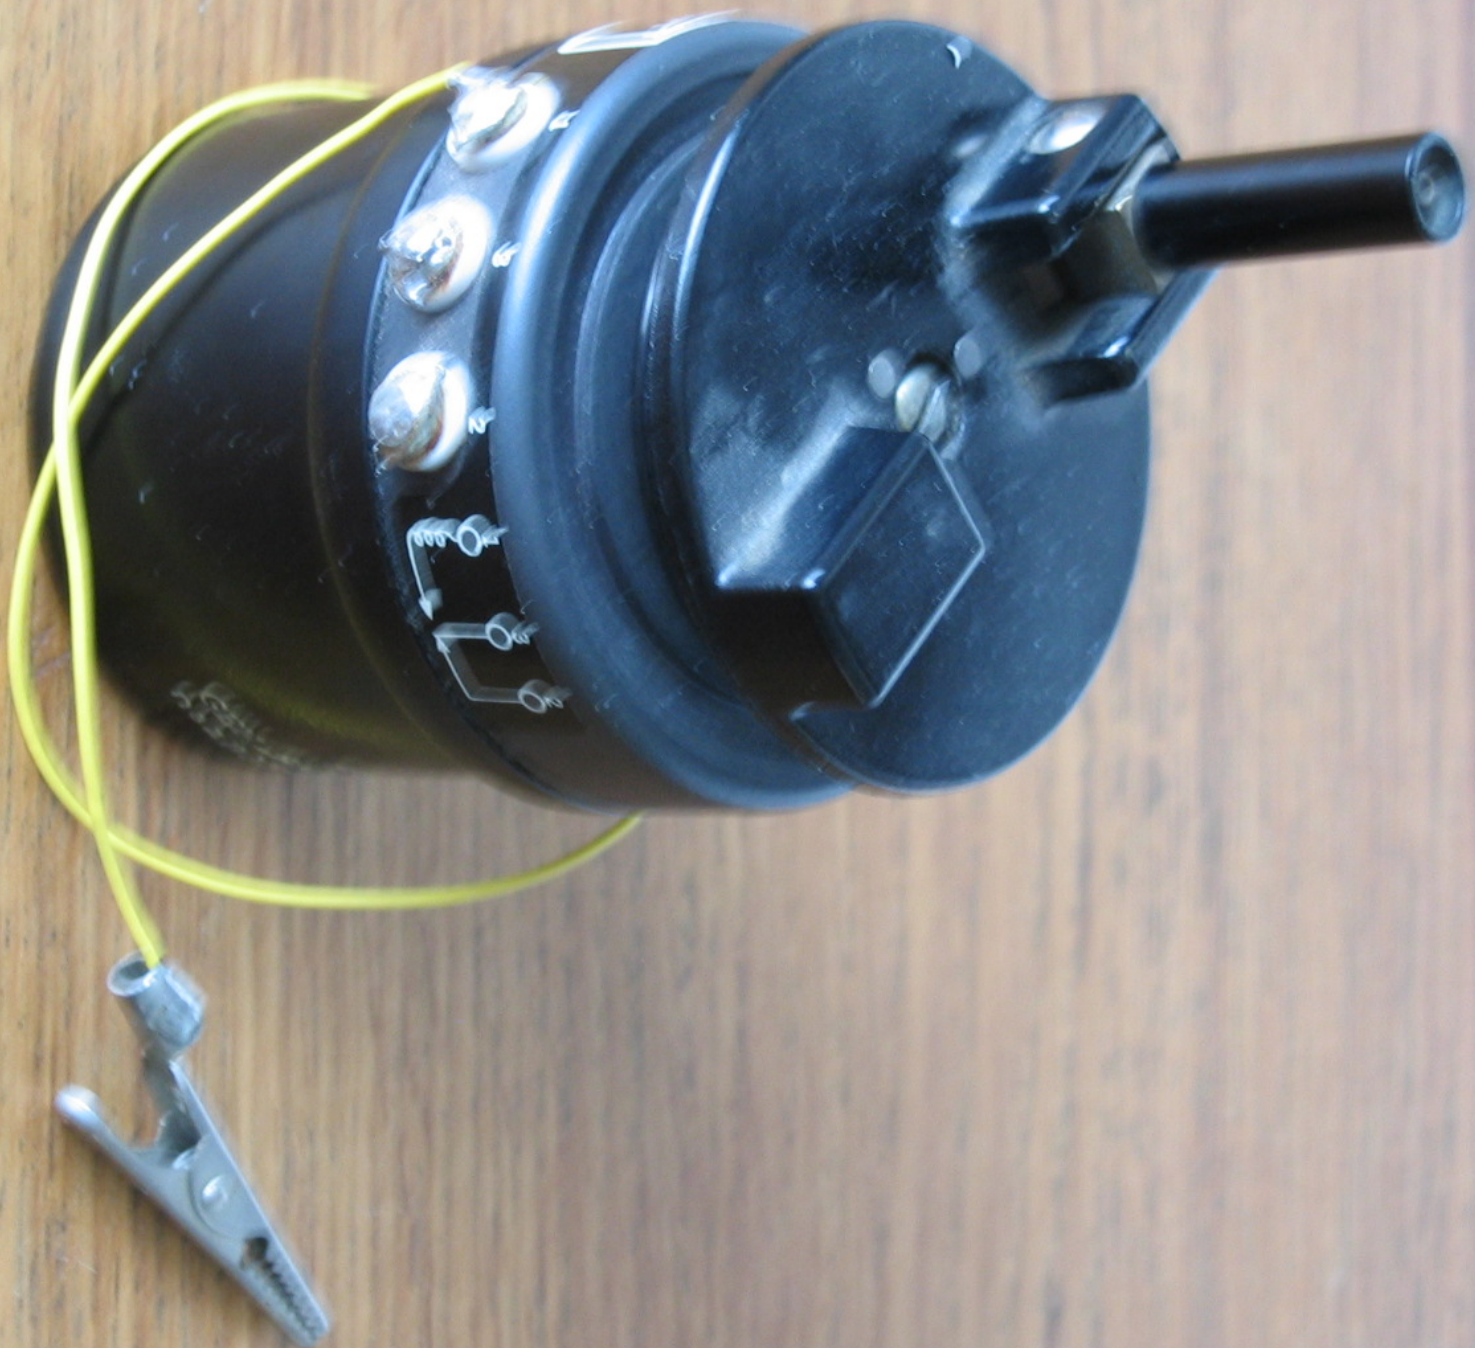






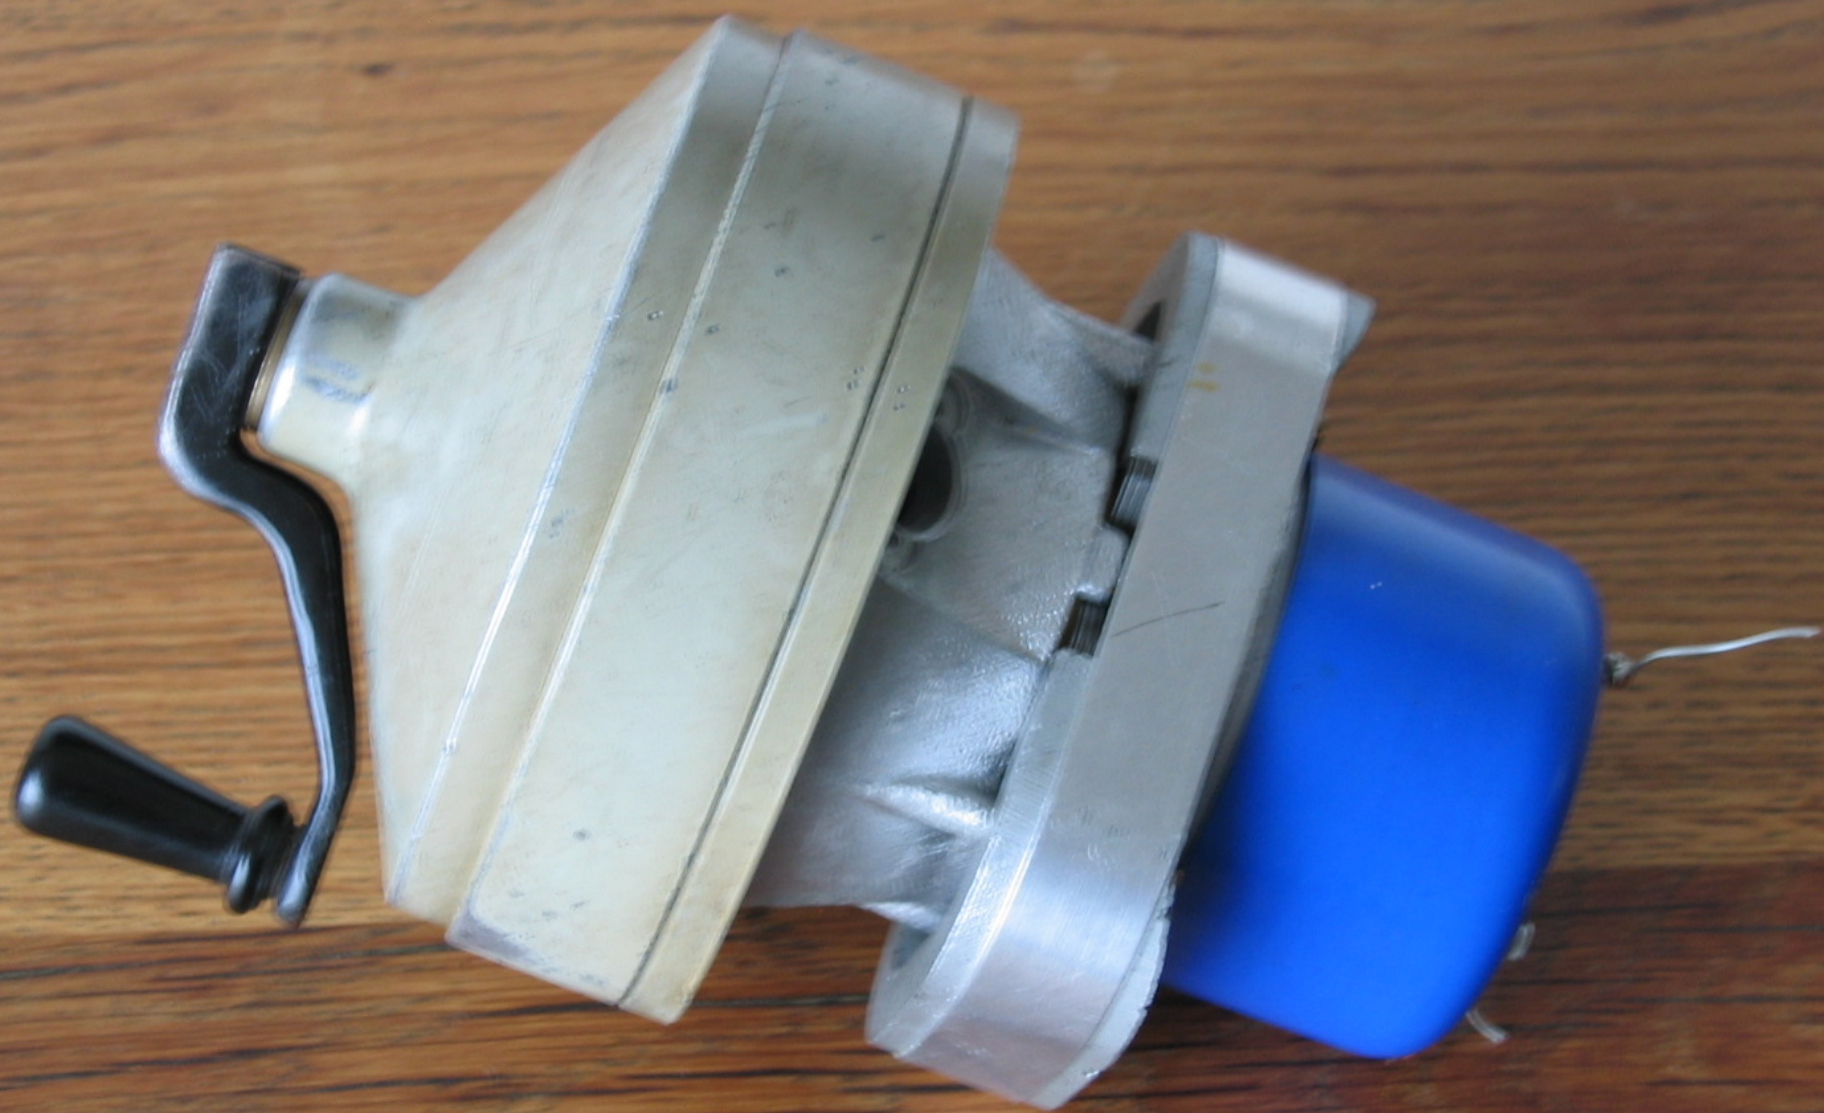



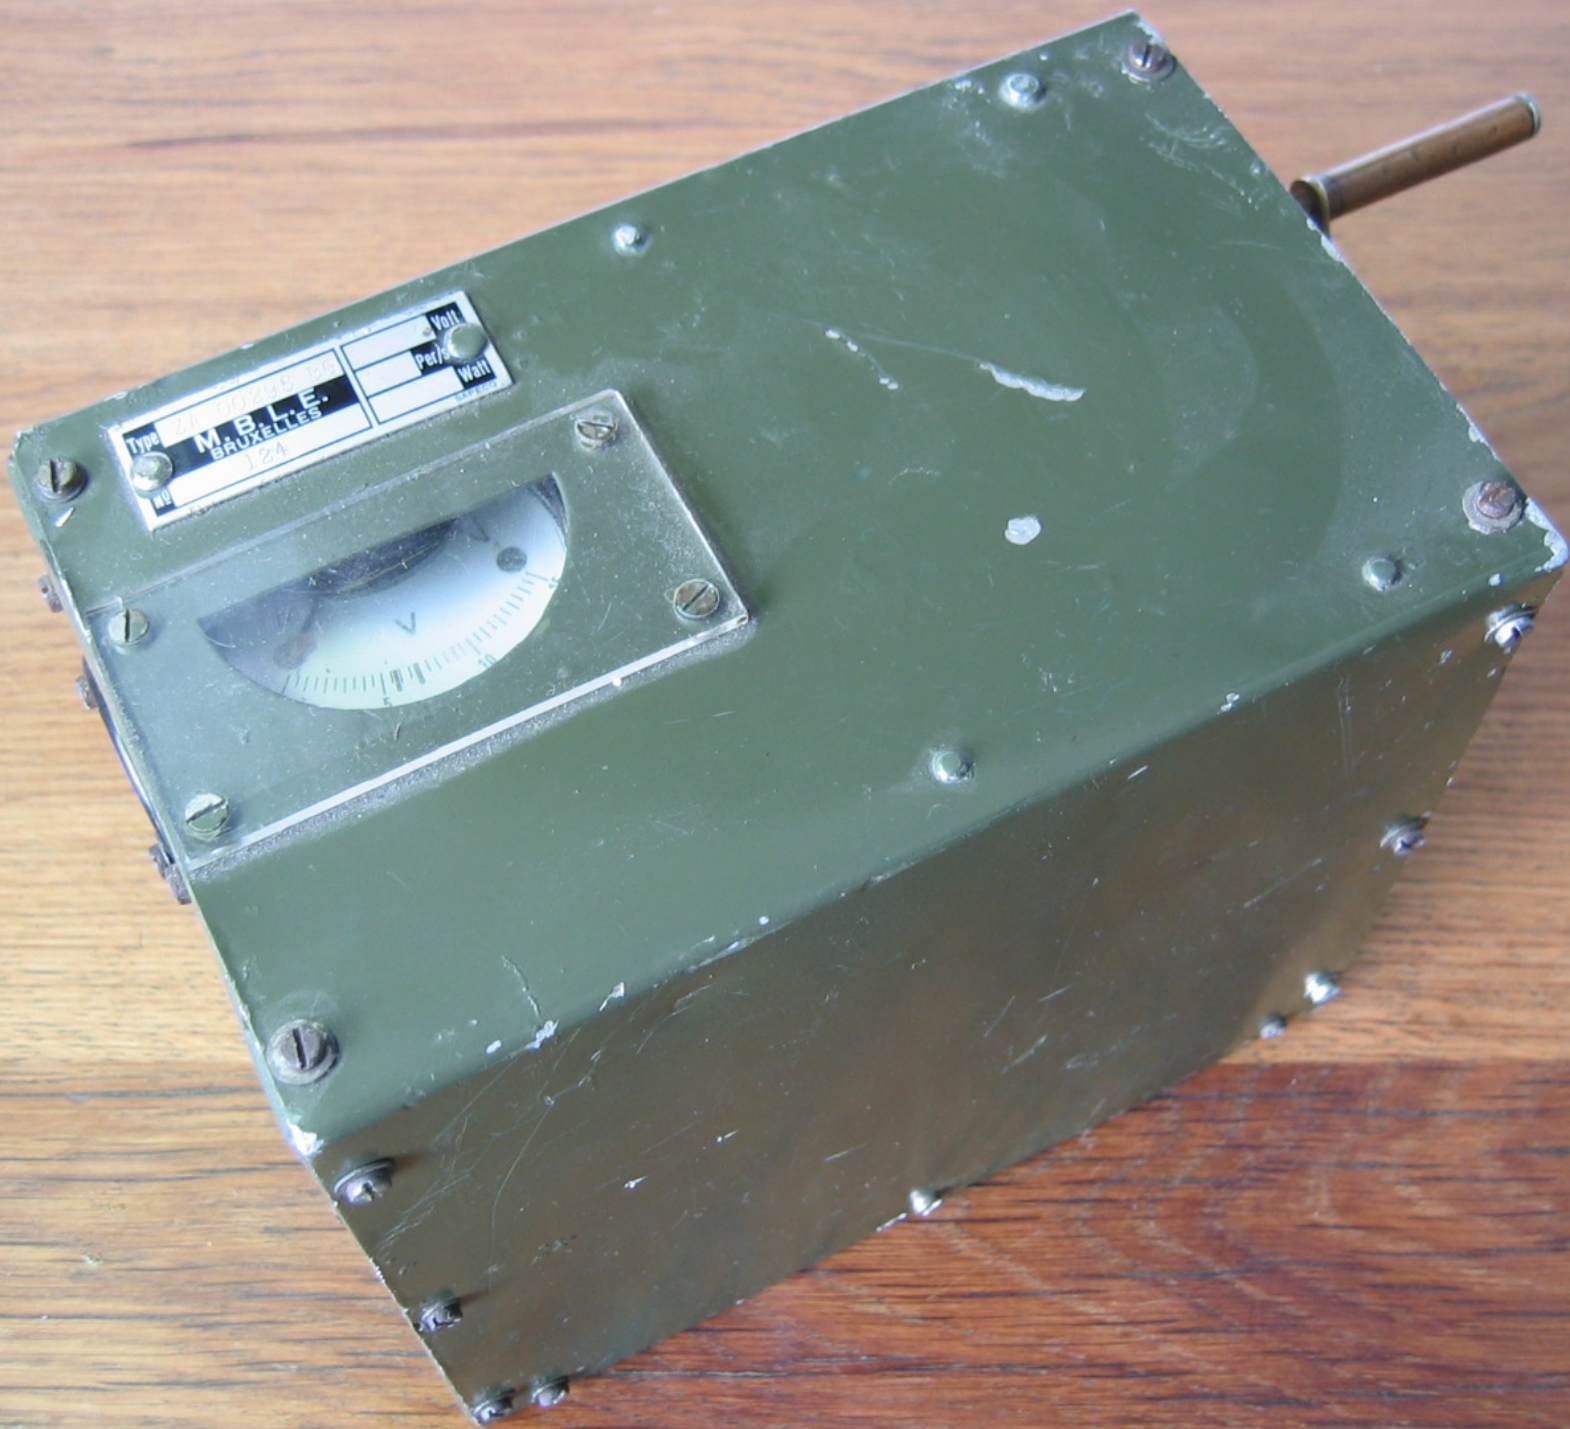











TABACOS GARANTIZADOS
CIGARRROS AUTENTICOS






TABACOS GARANTIZADOS
CIGARRROS AUTENTICOS





FABRICA GARANTIZADOS
CIGARRILLOS AUTÉNTICOS

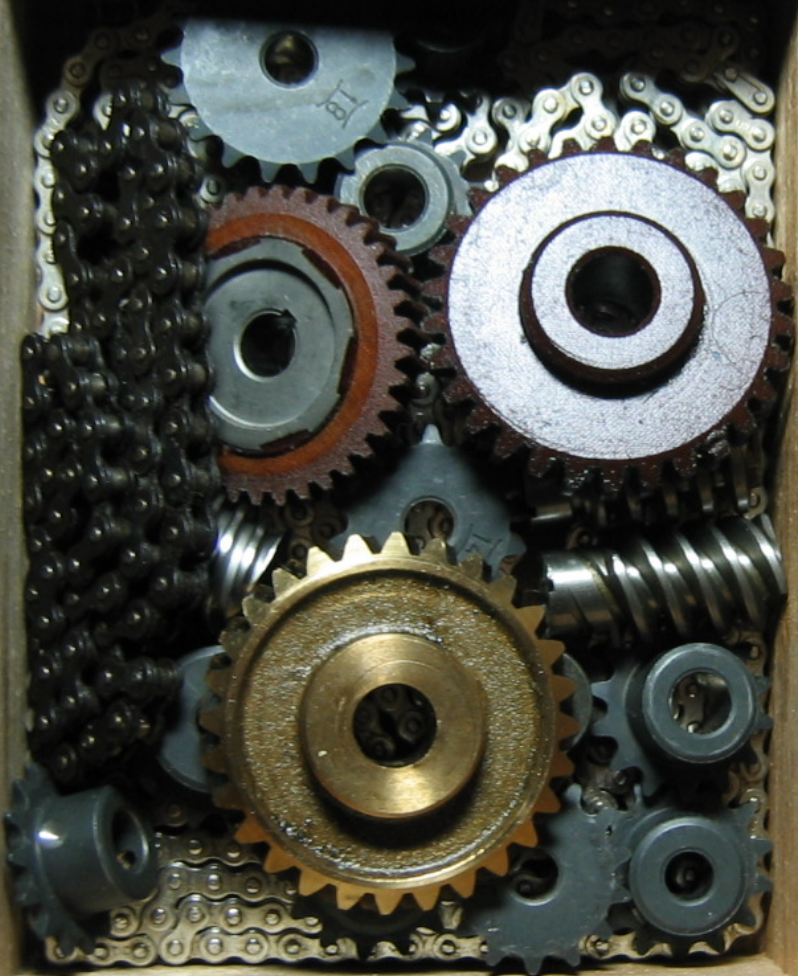









TABACOS GARANTIZADOS
CIGARROS AUTÉNTICOS





HAND MADE IN JAMAICA W.I.


PETT CORONAS











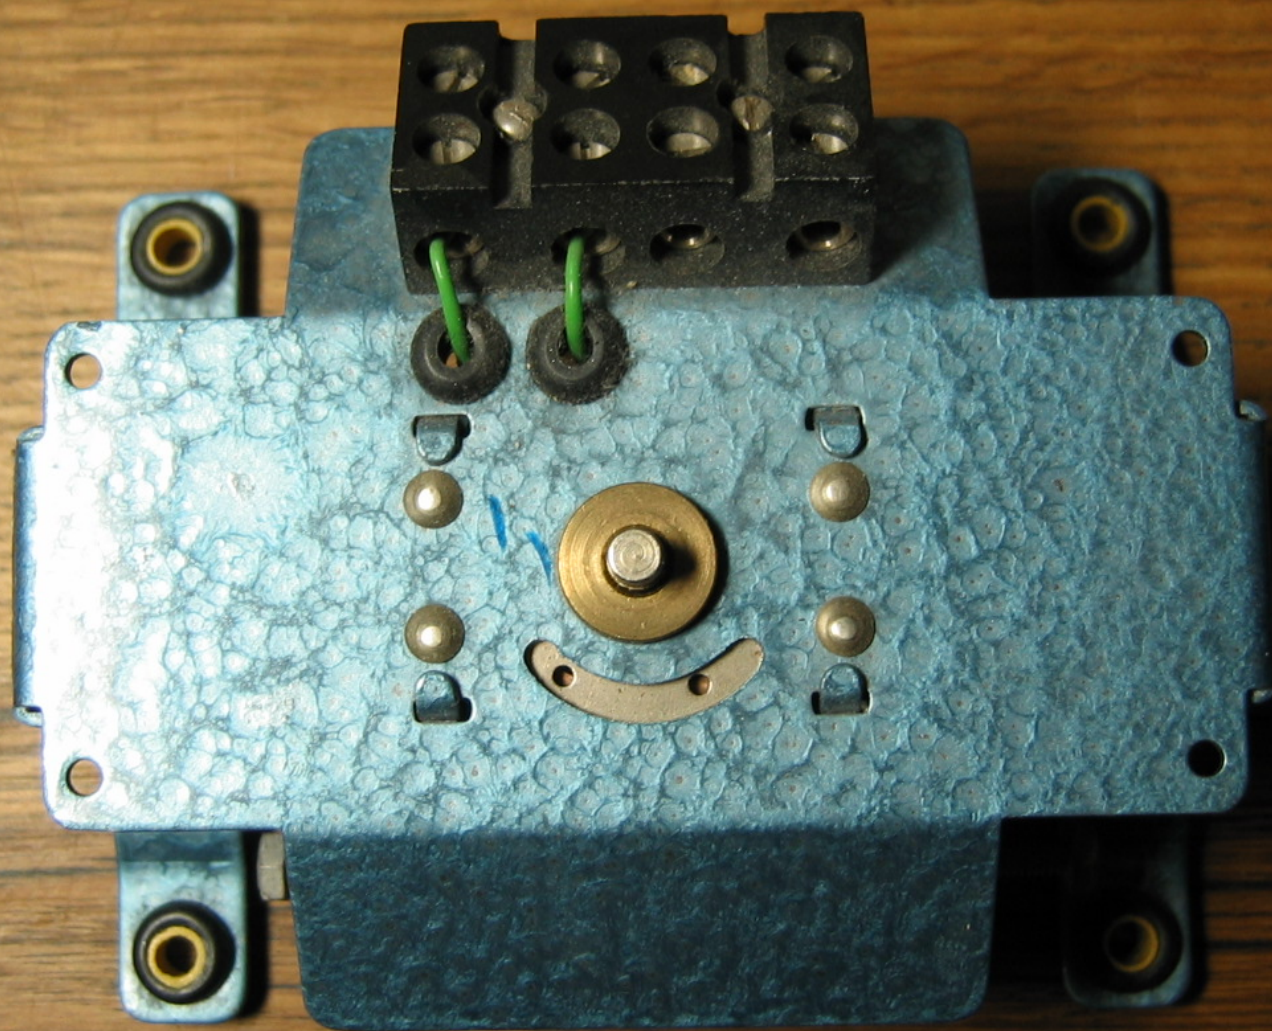



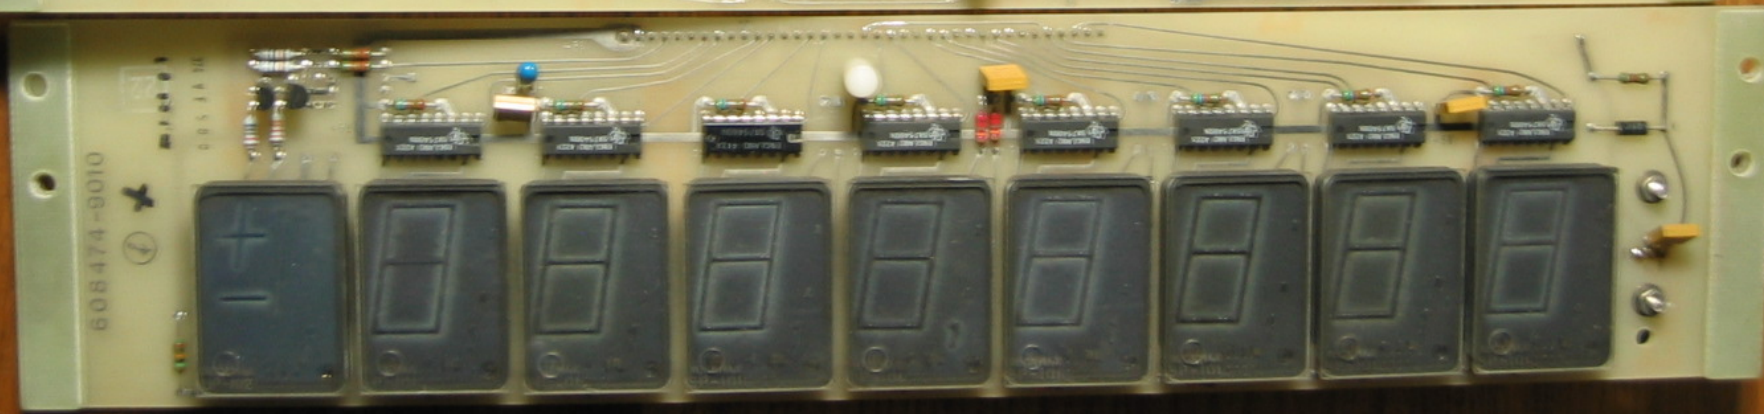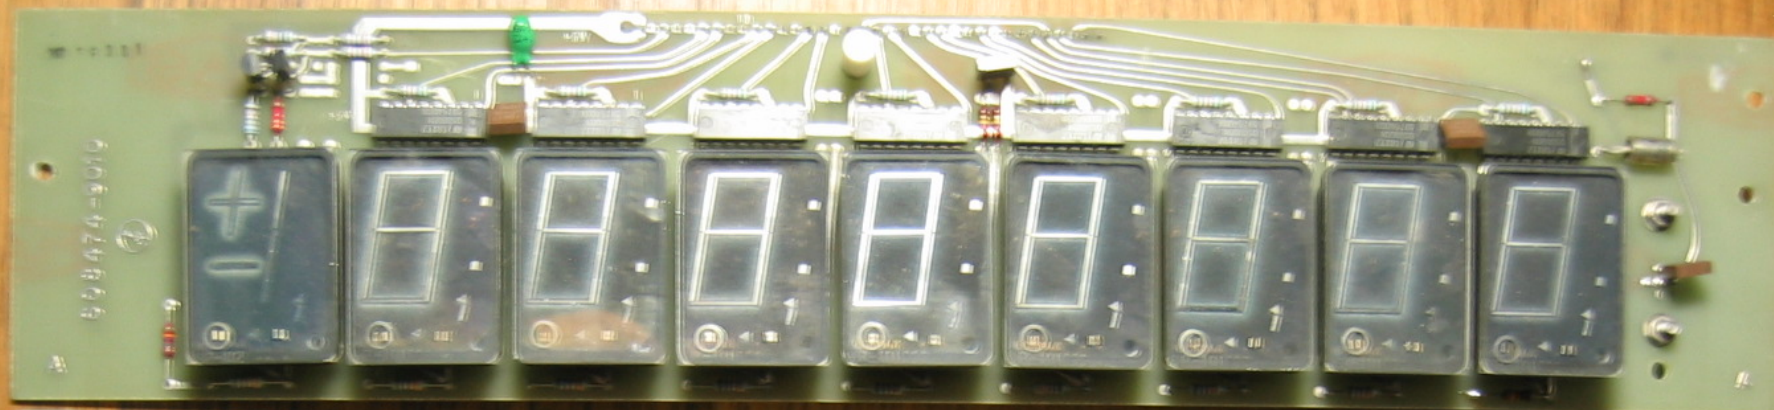

























104
M.B.L.E.
BRUXELLES
104
SAFEGUARD

Volt
Per/s
Watt



10





Type ZA 00295 BG		M.B.L.E.		BRUXELLES		124		N°	
Volt		Per/A		Watt		SAPECO			




WE RECOMMEND CONSUMPTION WITHIN 7 DAYS

In keeping with AUSTRALIAN HOMEMADE tradition, these chocolates represent the unique blend of kitchen freshness and quality preparation that goes into each one of our products. Due to the fact that we use only natural ingredients, there is a limited maximum hold.



WE RECOMMEND CONSUMPTION WITHIN 7 DAYS

In keeping with AUSTRALIAN HOMEMADE tradition, these chocolates represent the unique blend of kitchen freshness and quality preparation that goes into each one of our products. Due to the fact that we use only natural ingredients, there is a limited maximum hold.

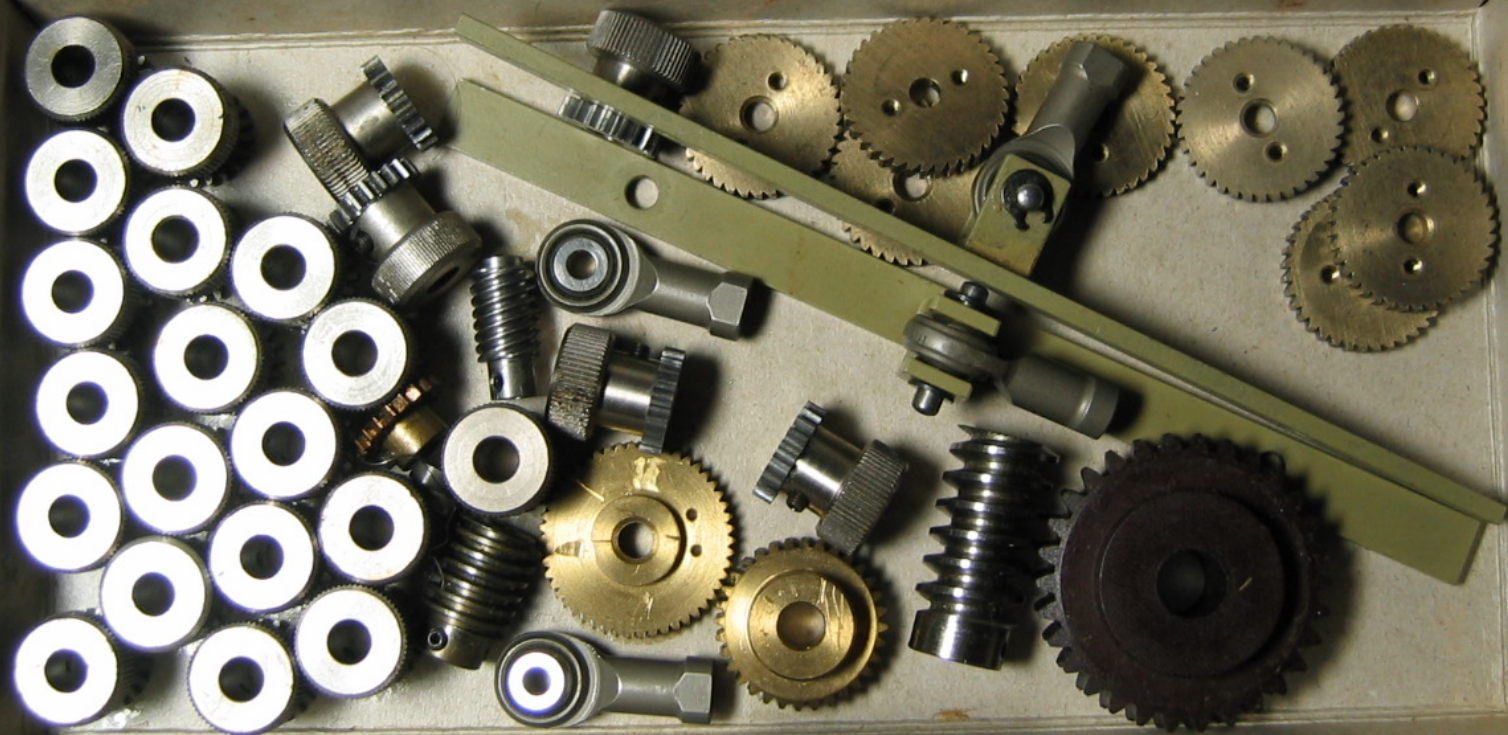

OR = OP
WEG = WEG

50 SENORITAS VOCA 16,25



WEG = WEG

50 SENORITAS VOOR 16,25







IMPORT-EXPORT

BACO ARMY GOODS BV
Telefoon: (0255) 51 16 12



BACO
Telefoon: (0255) 51 16

IMPORT-EXPORT




060 €









10 TUBED CIGARS
MADE IN HOLLAND

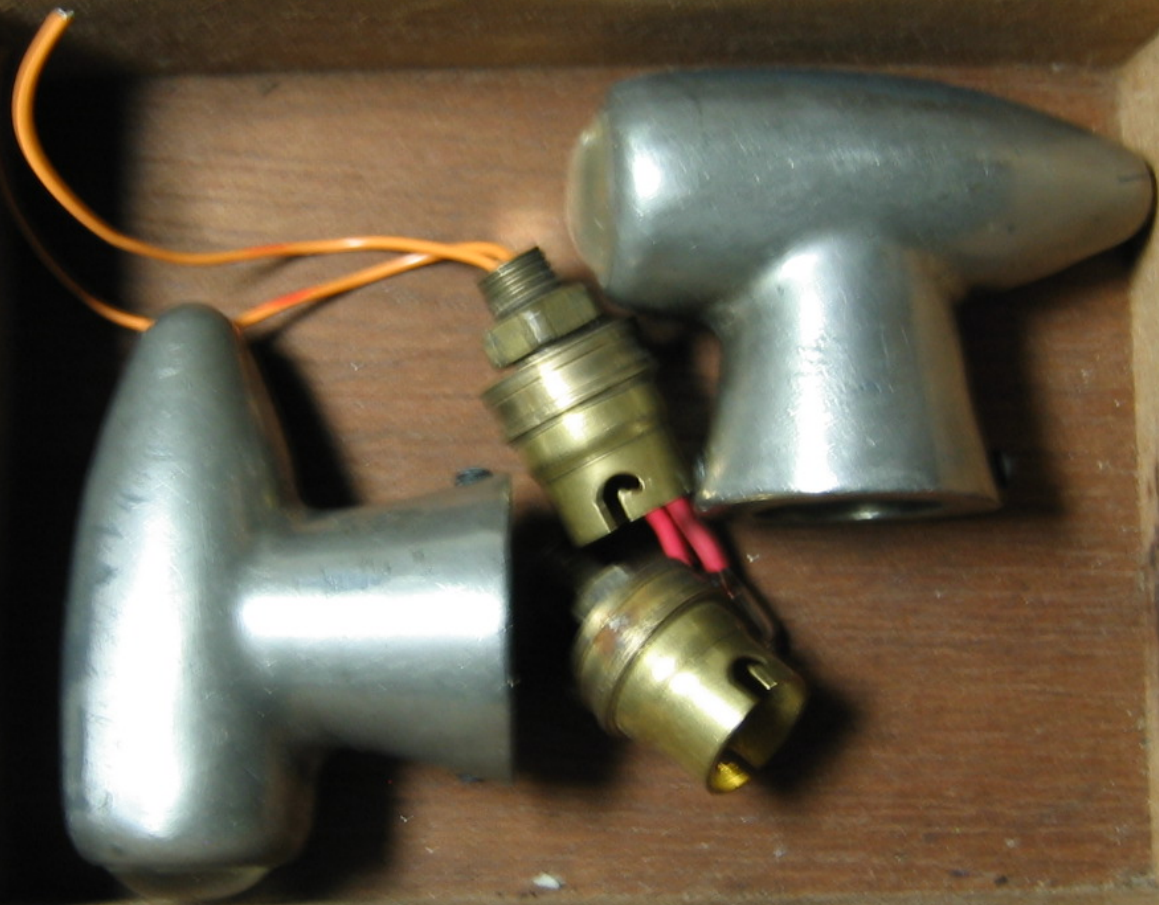


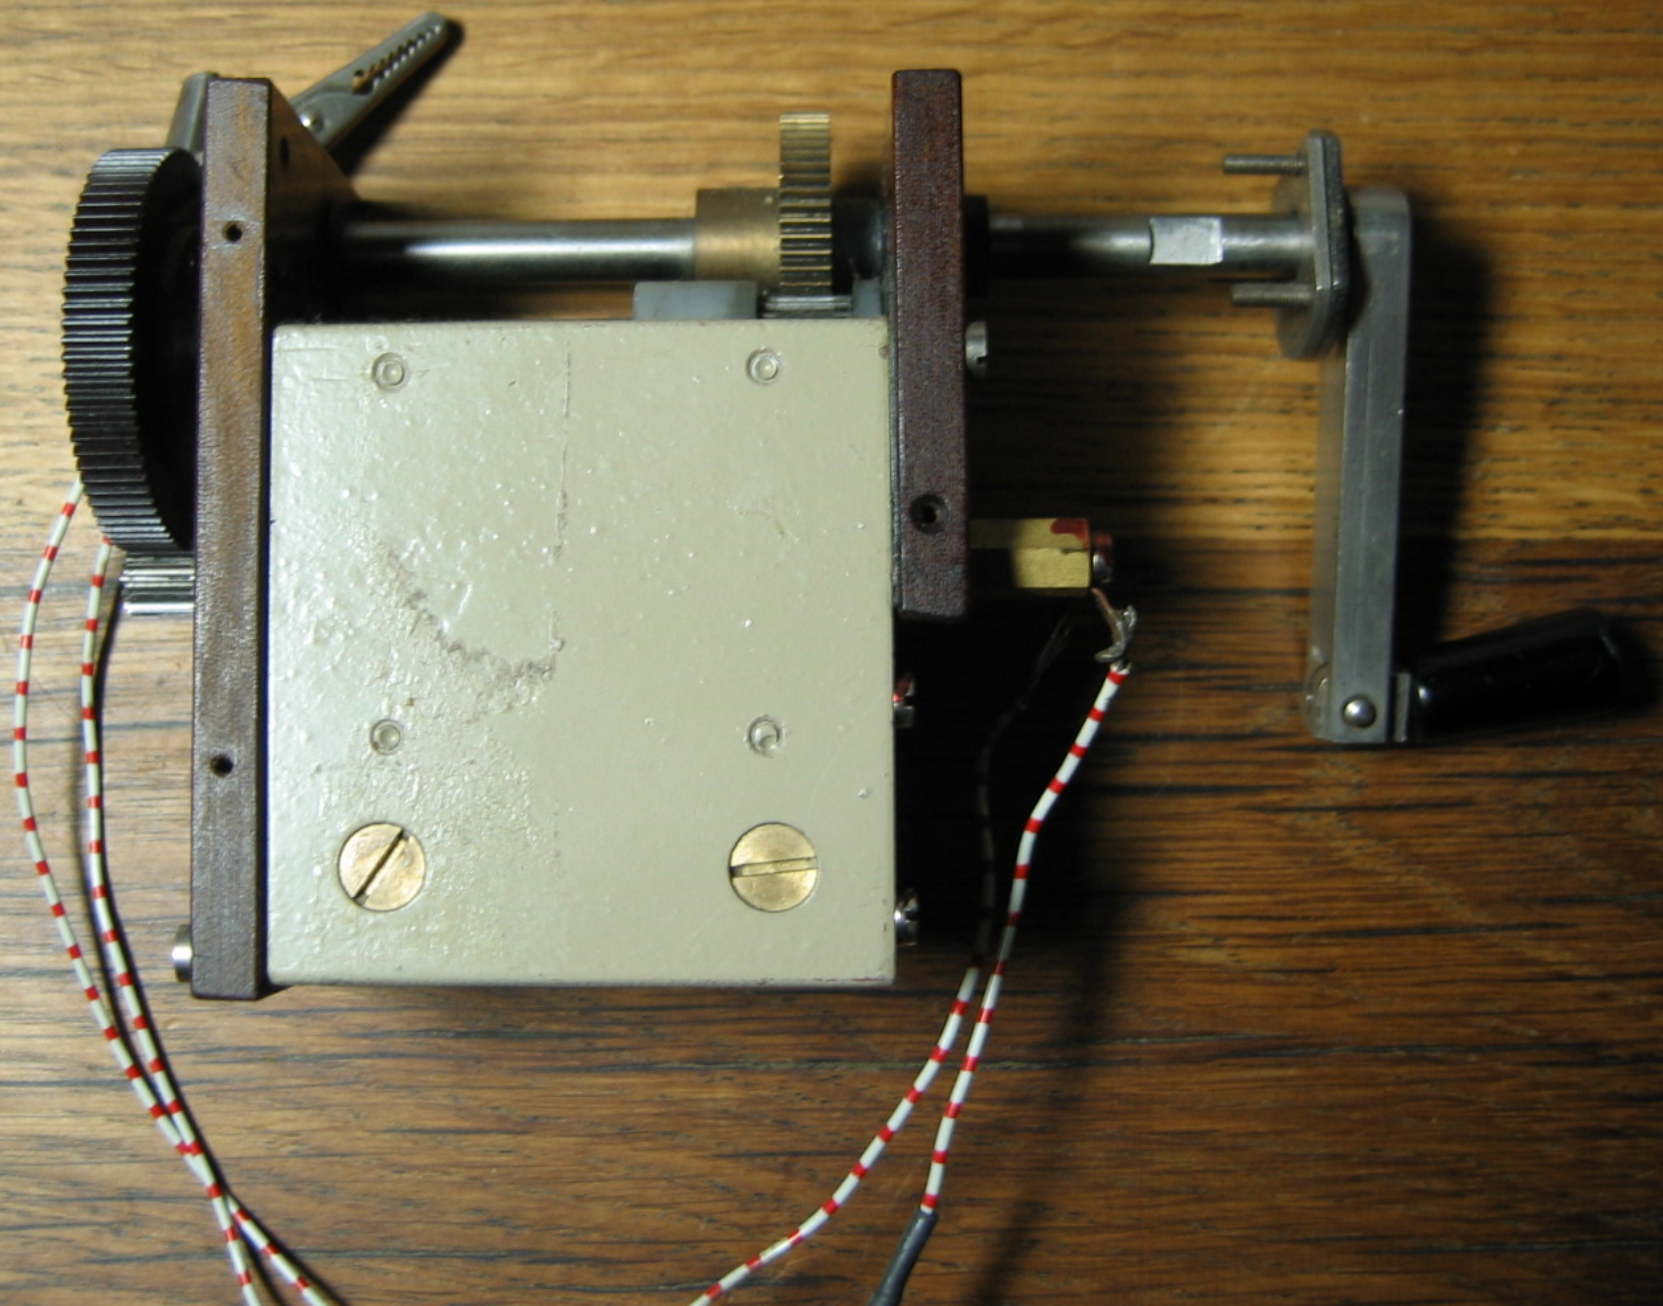


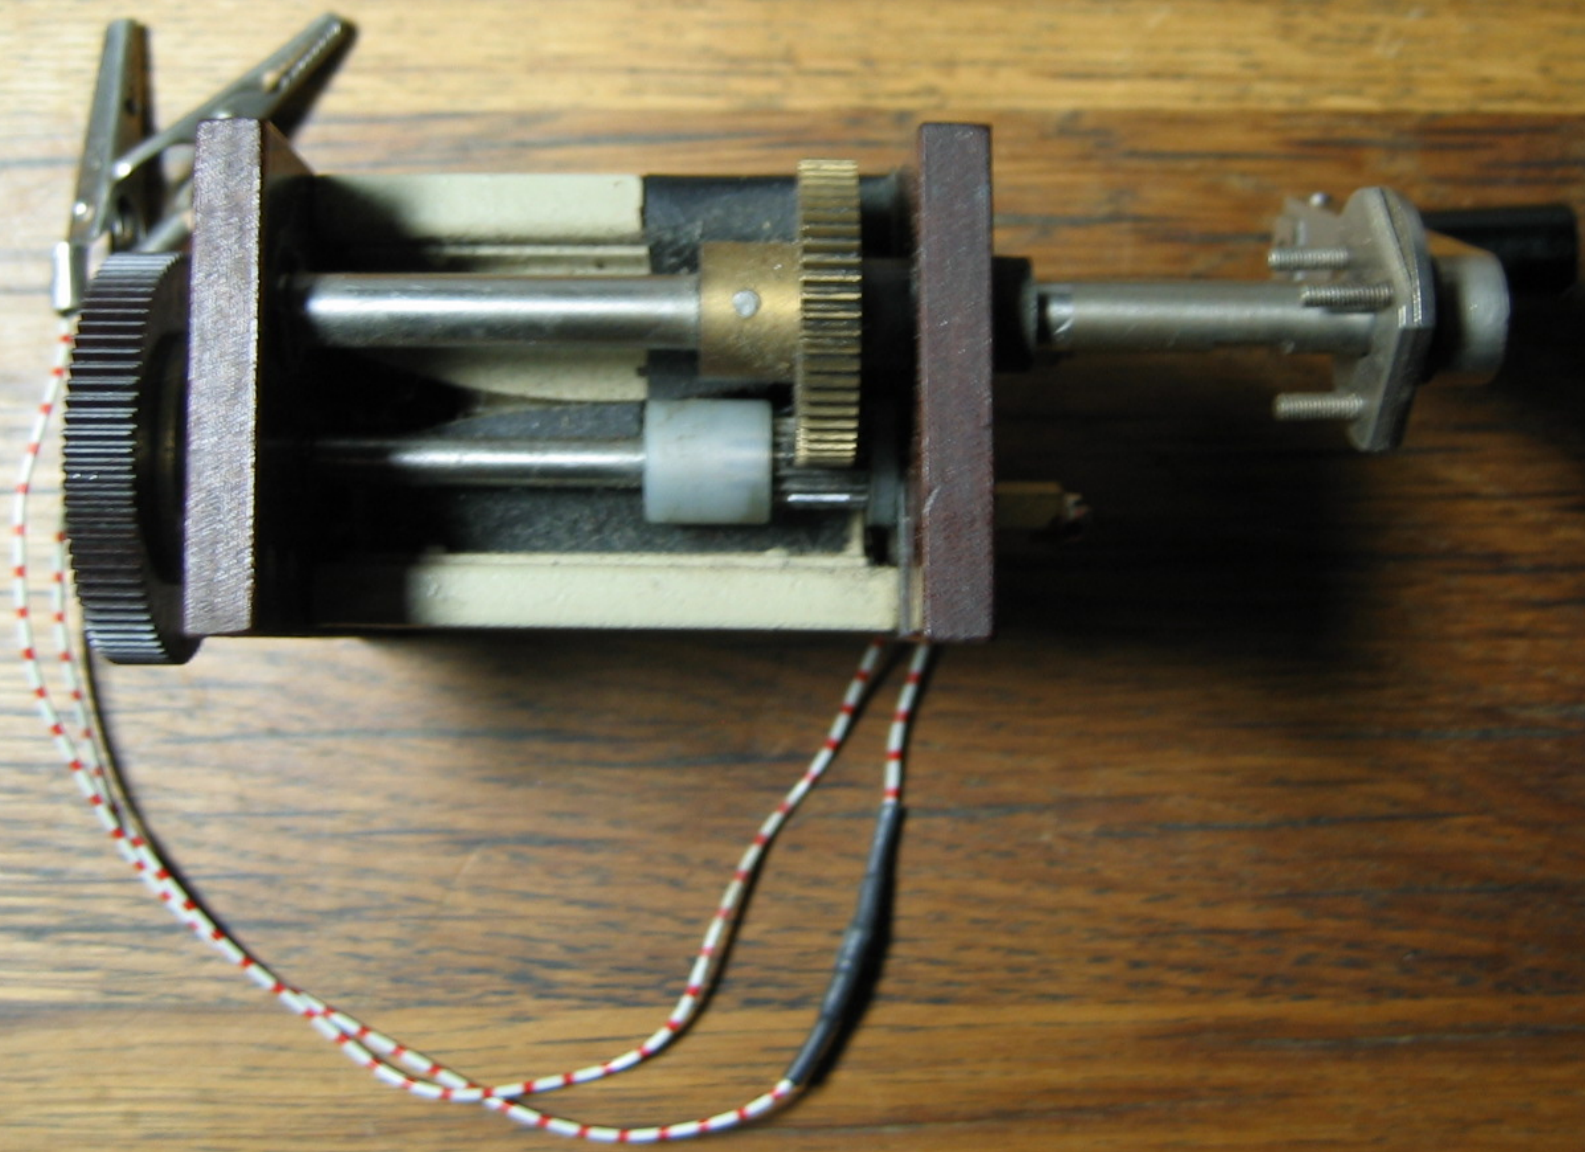




SPEEDCOR
GENERATOR-G-42A/P
DAB05-69-C-3526

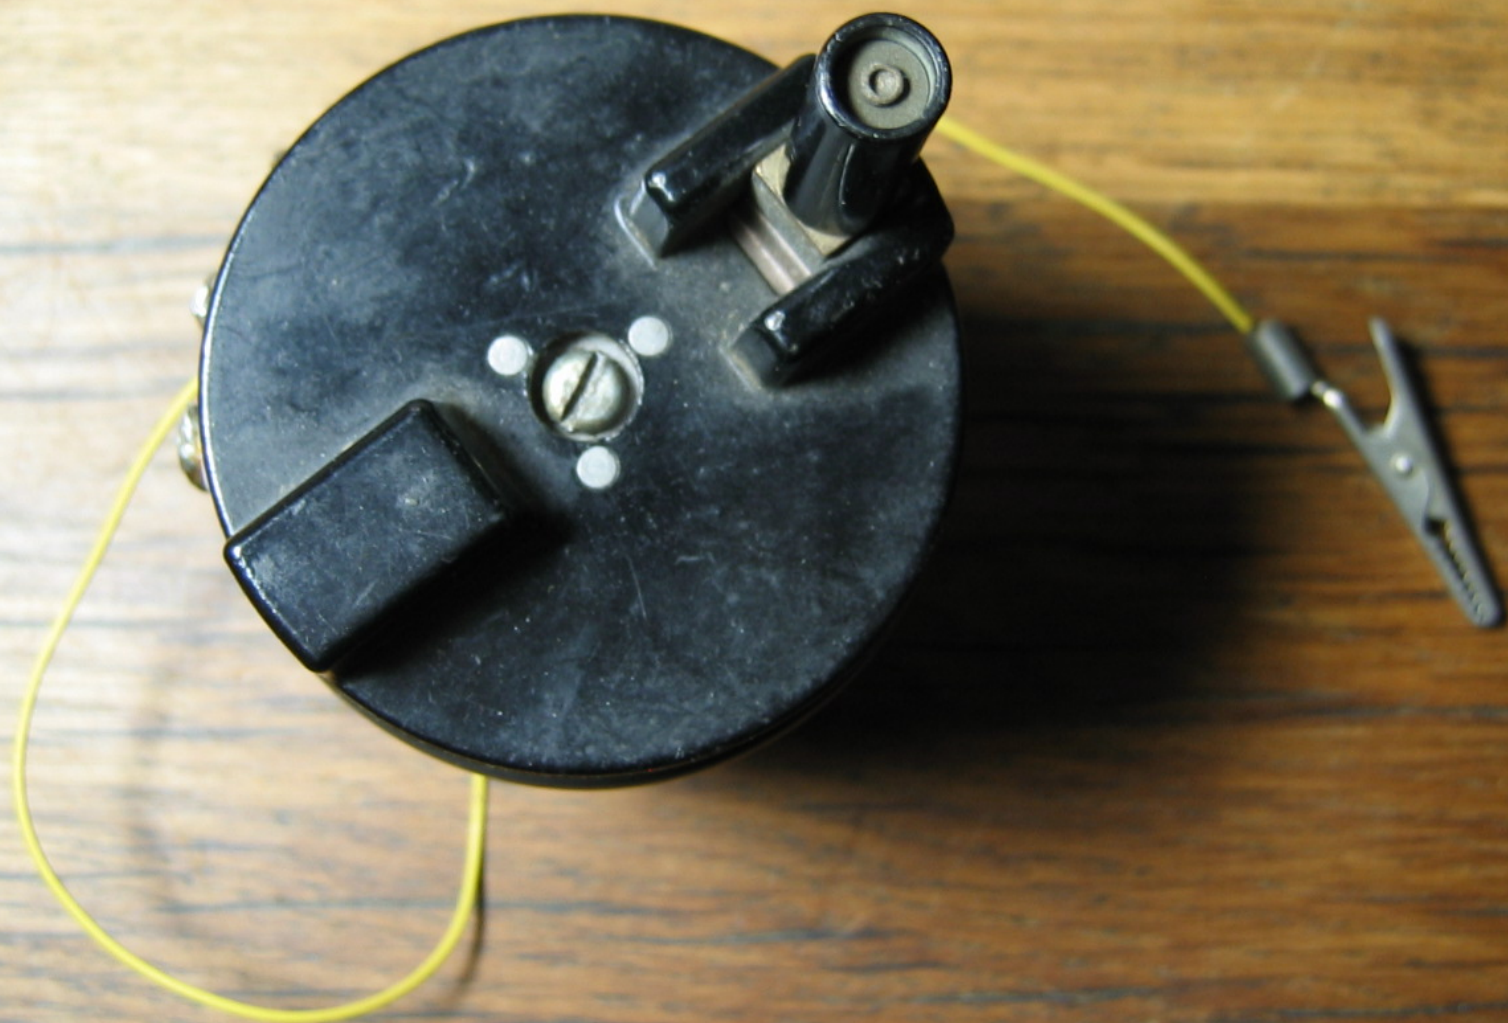

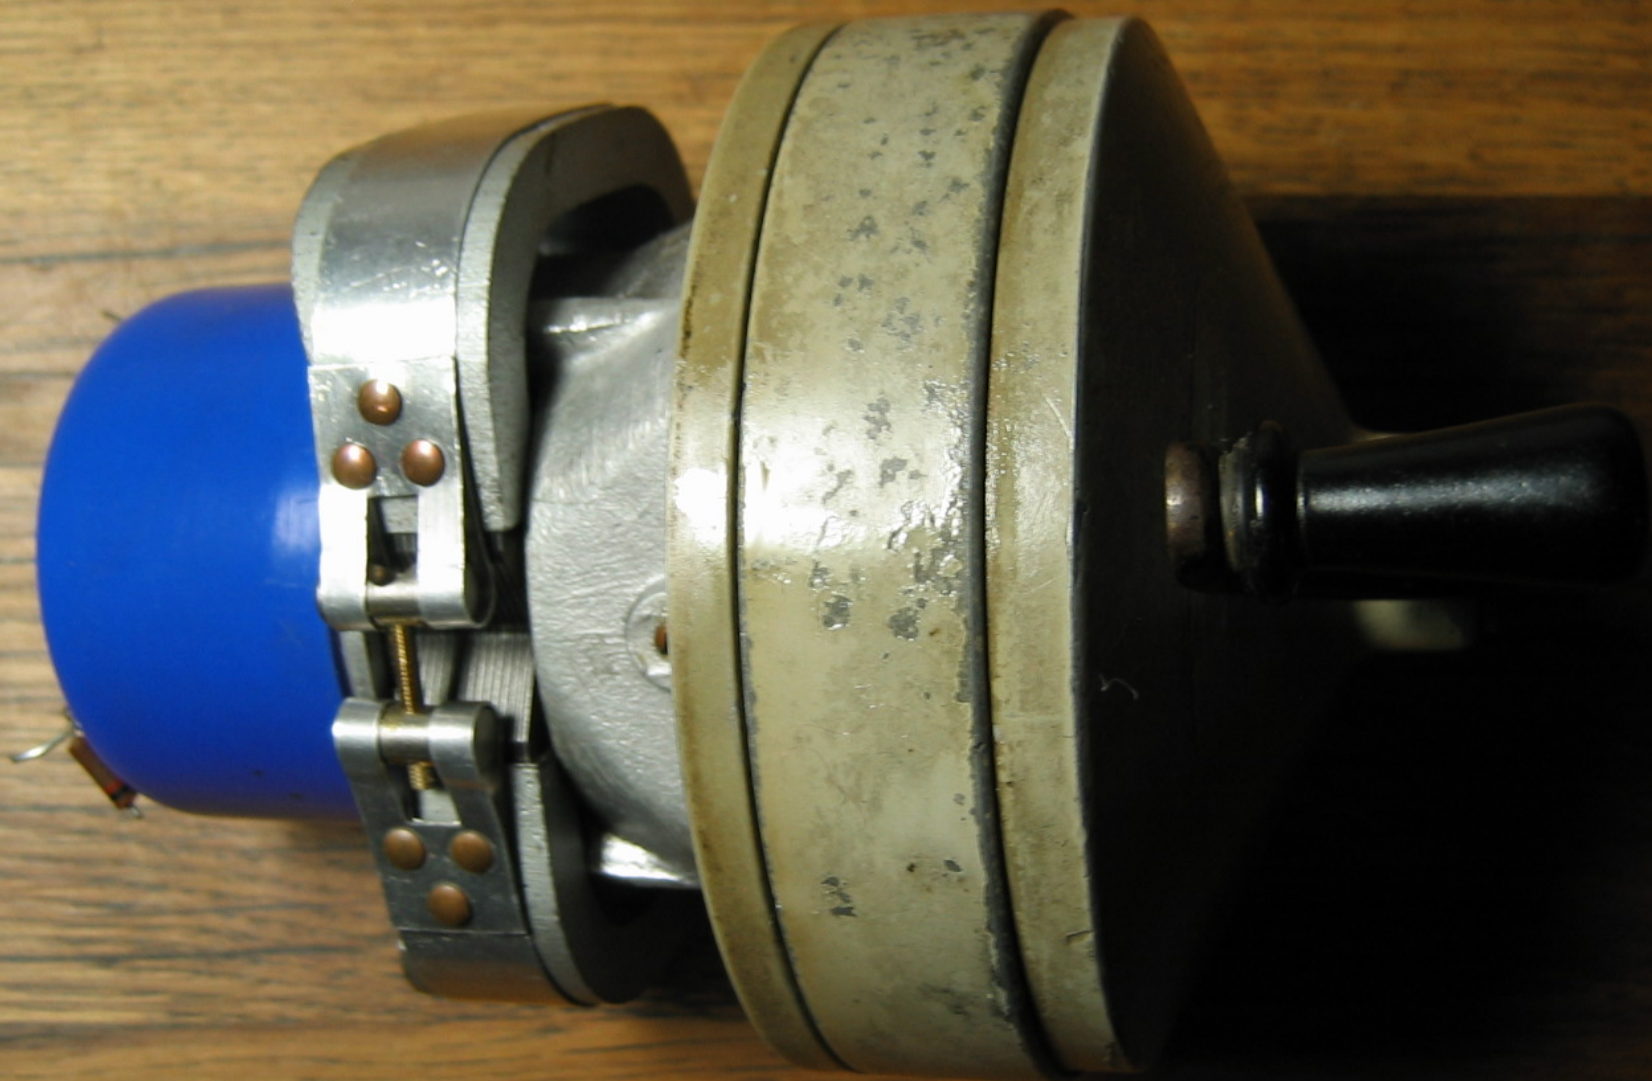



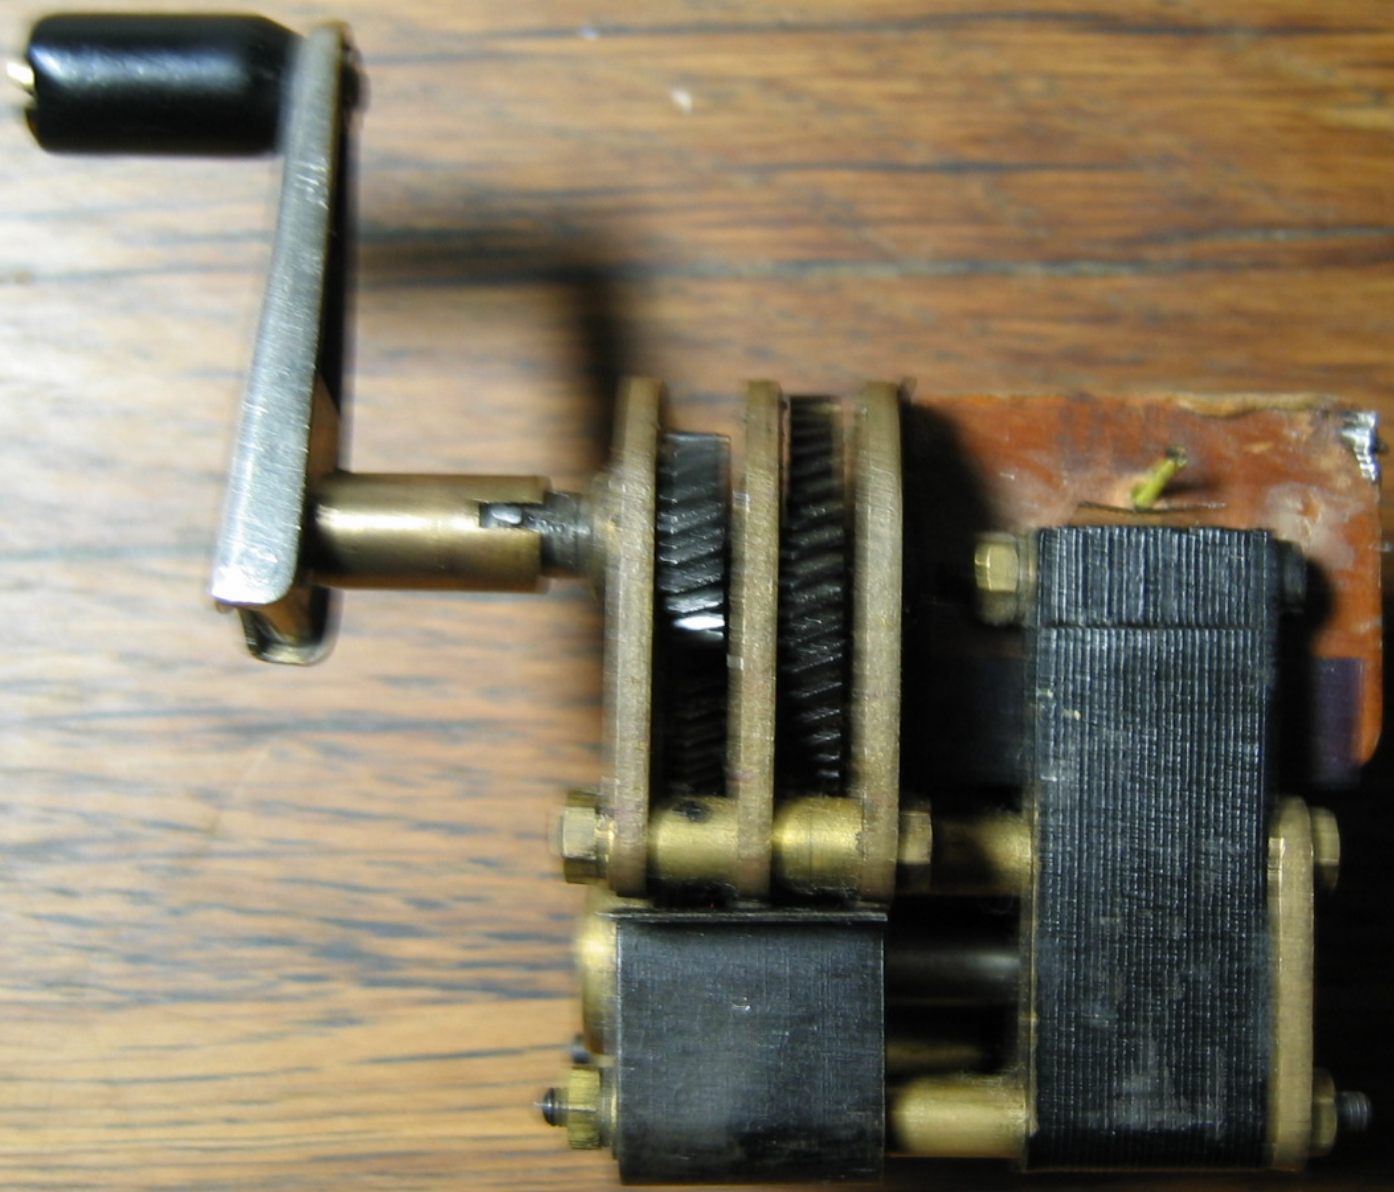



















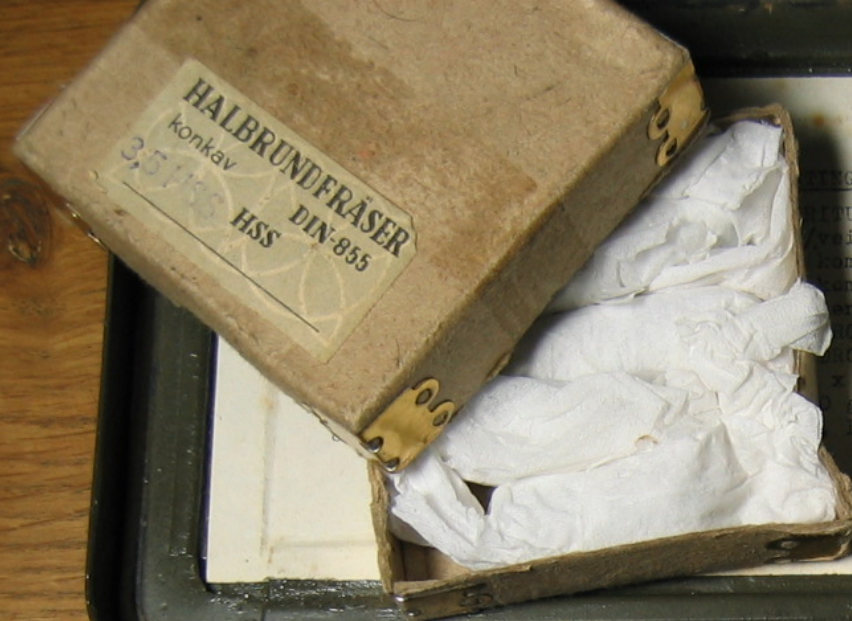

ING, MOTORVOERTUIG, klein model


STUOSA, 2%, 2ml, in buisje	1 ✓
veiligheidsspelden, 1 st in doos	1 ✓
compres 16 x 10cm, khaki, gester., 1st	2 ✓
compres 20 x 20cm, khaki	
en, gester., 1 st	1
ROFIEL, 4 m x 10 cm, khaki, 1st	1
ROFIEL, 4m x 6 cm, khaki	3
x 8 cm, khaki, 18 st in doos	1 ✓
gr, geperst	1 ✓
L 36 t/m 45 mm, 12 st	1




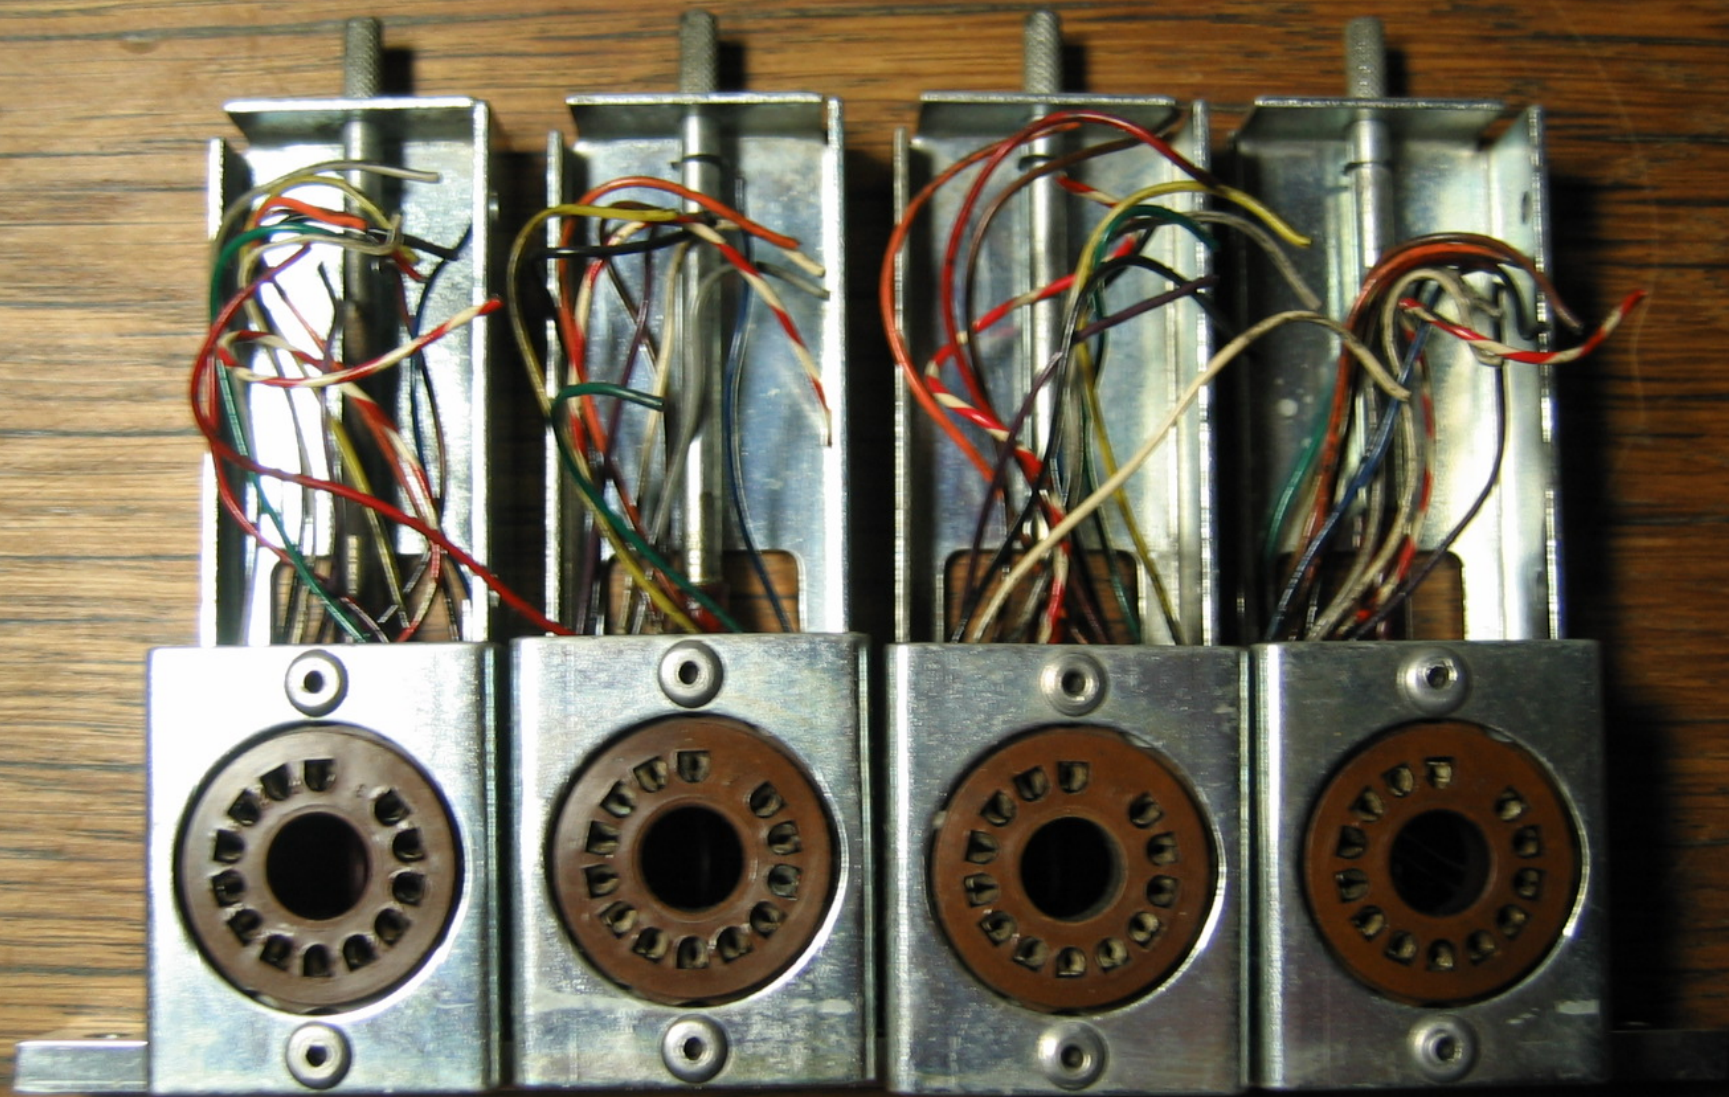





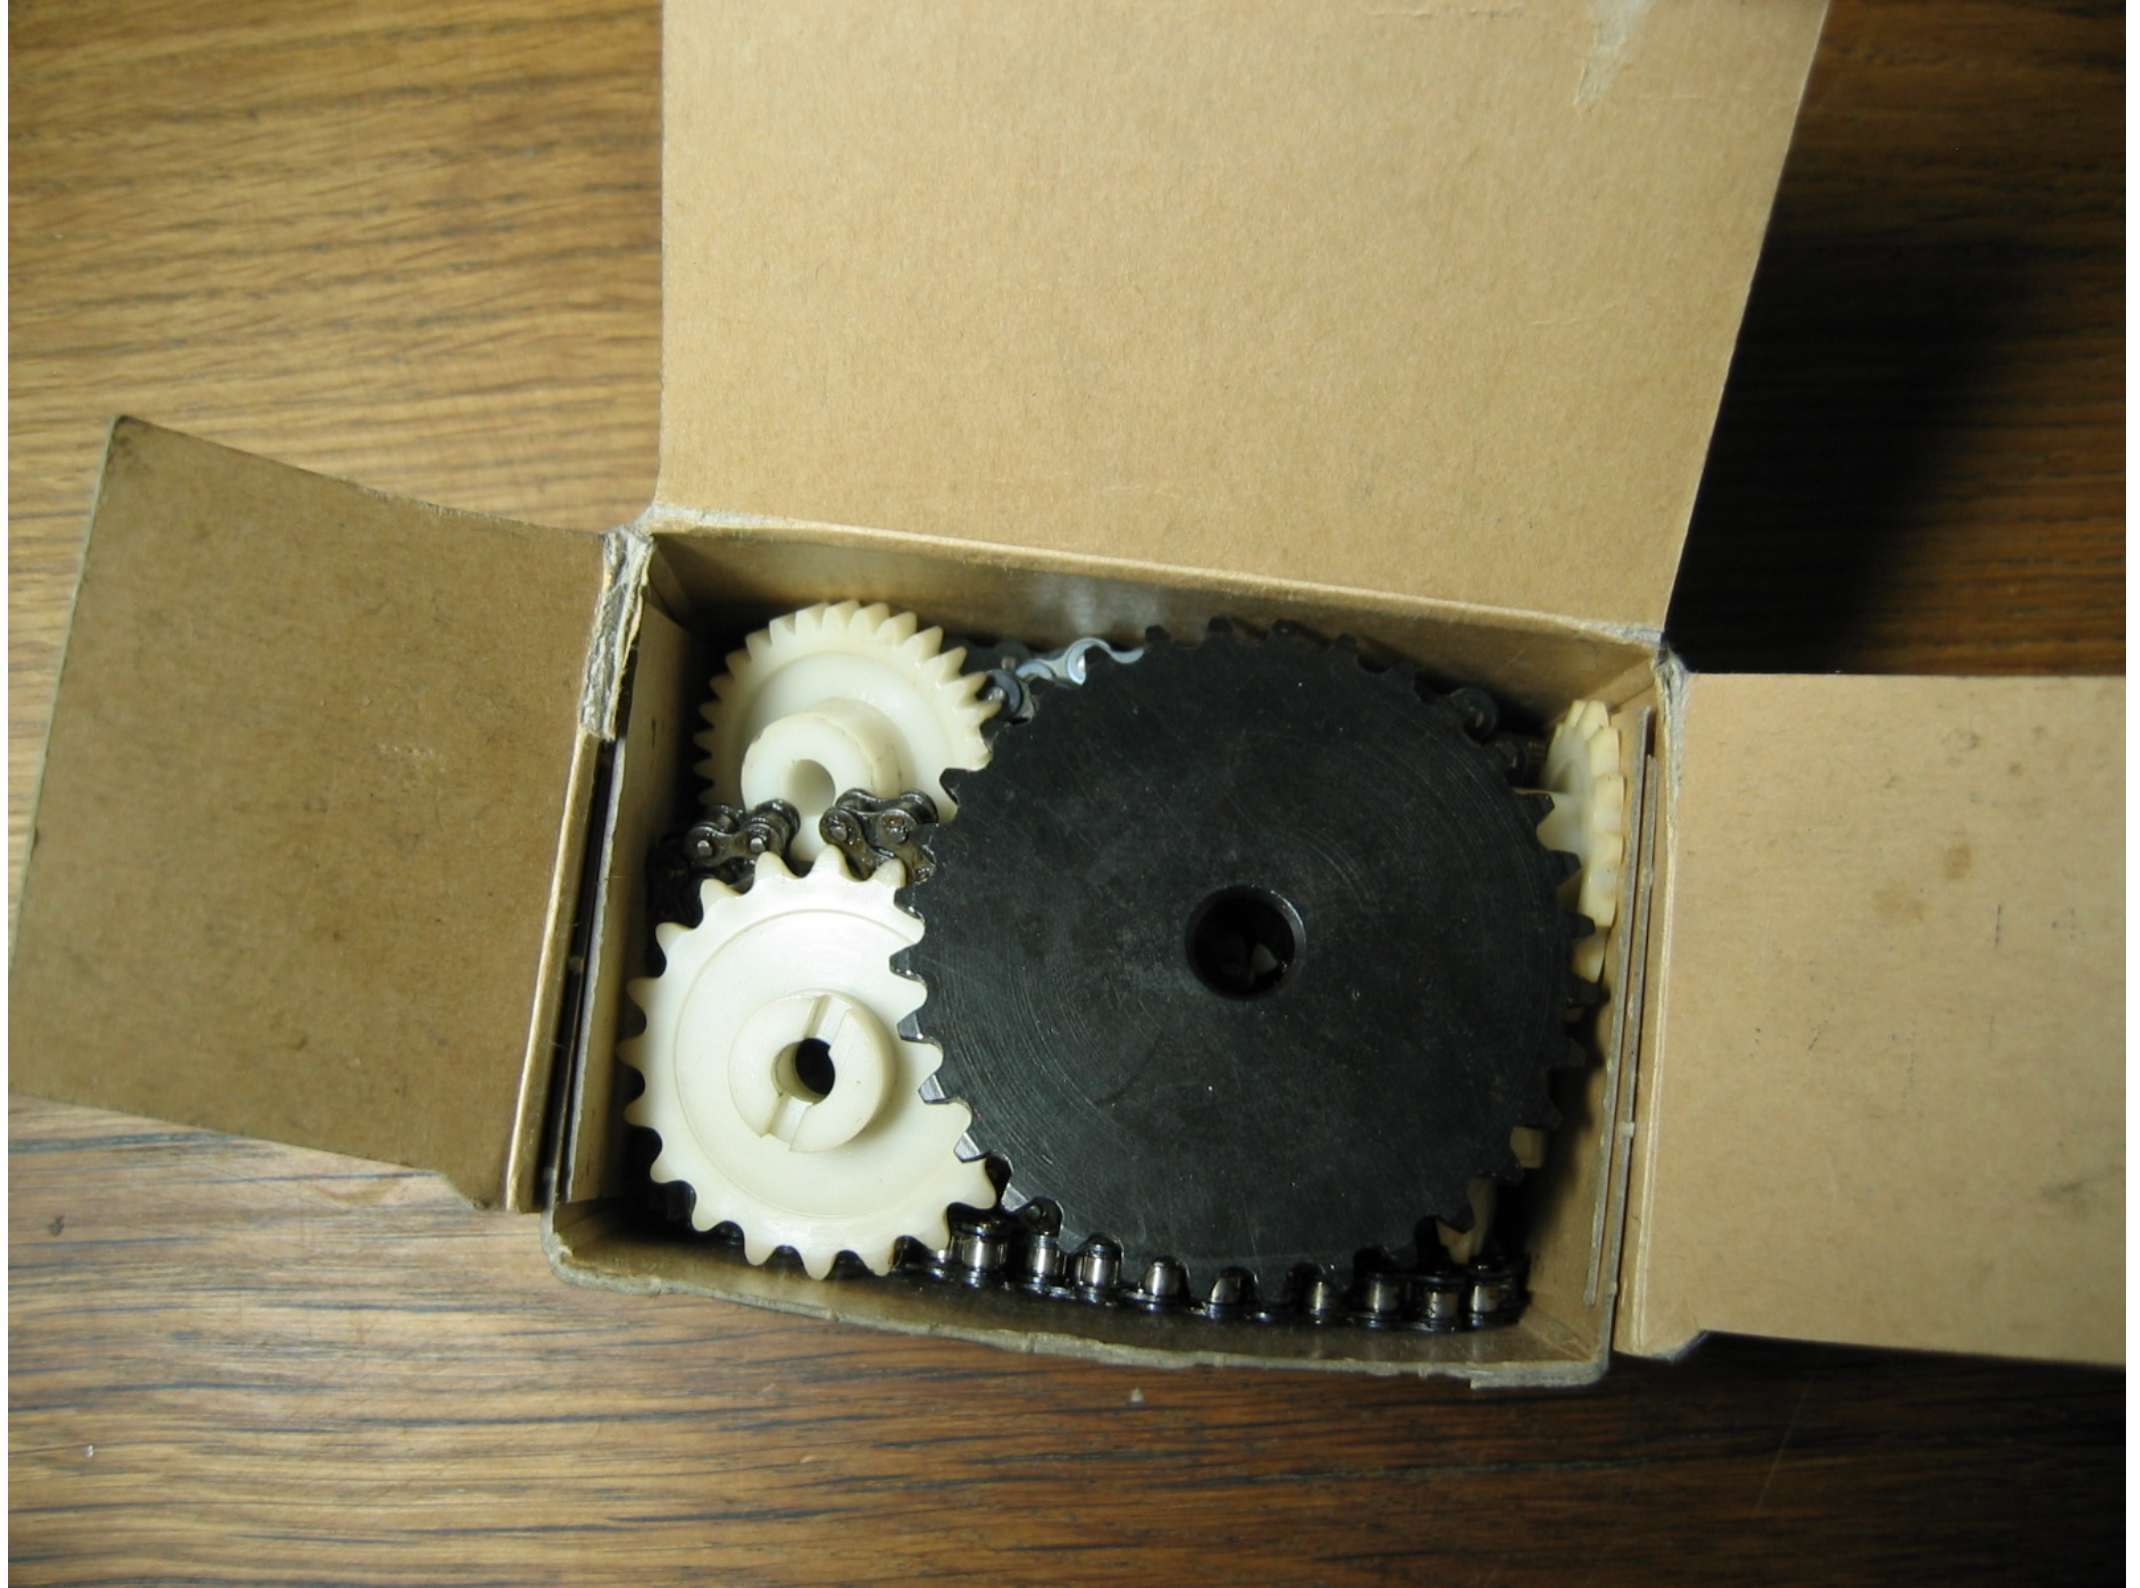

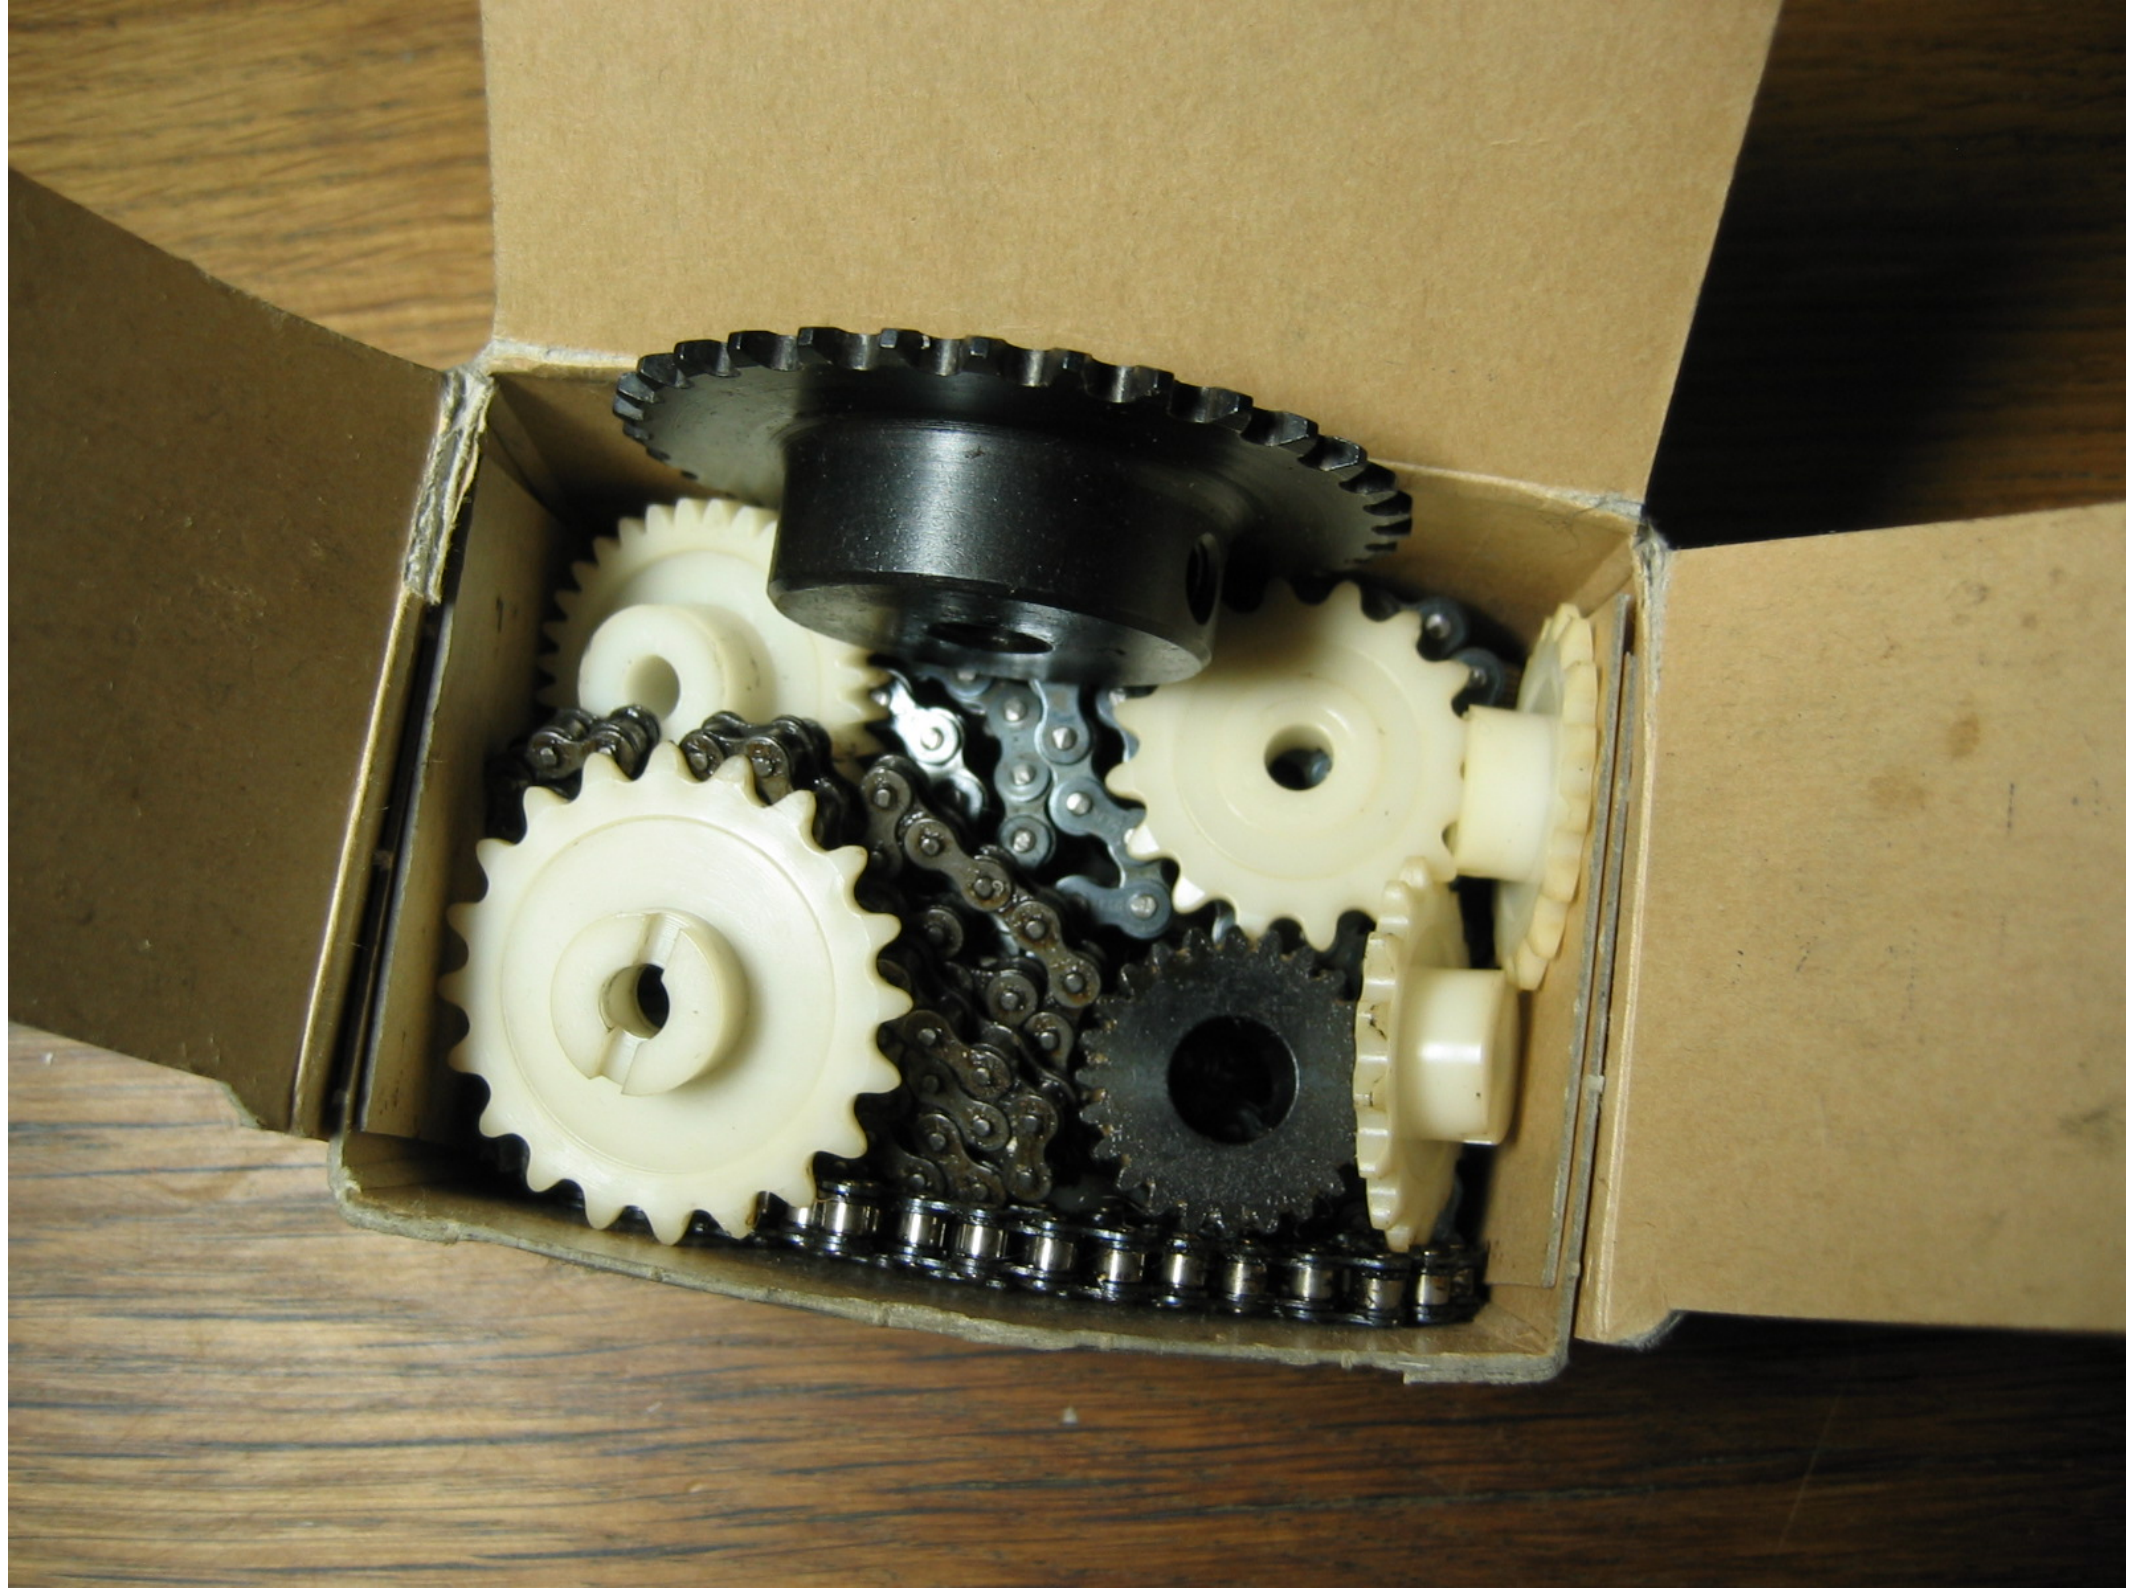


















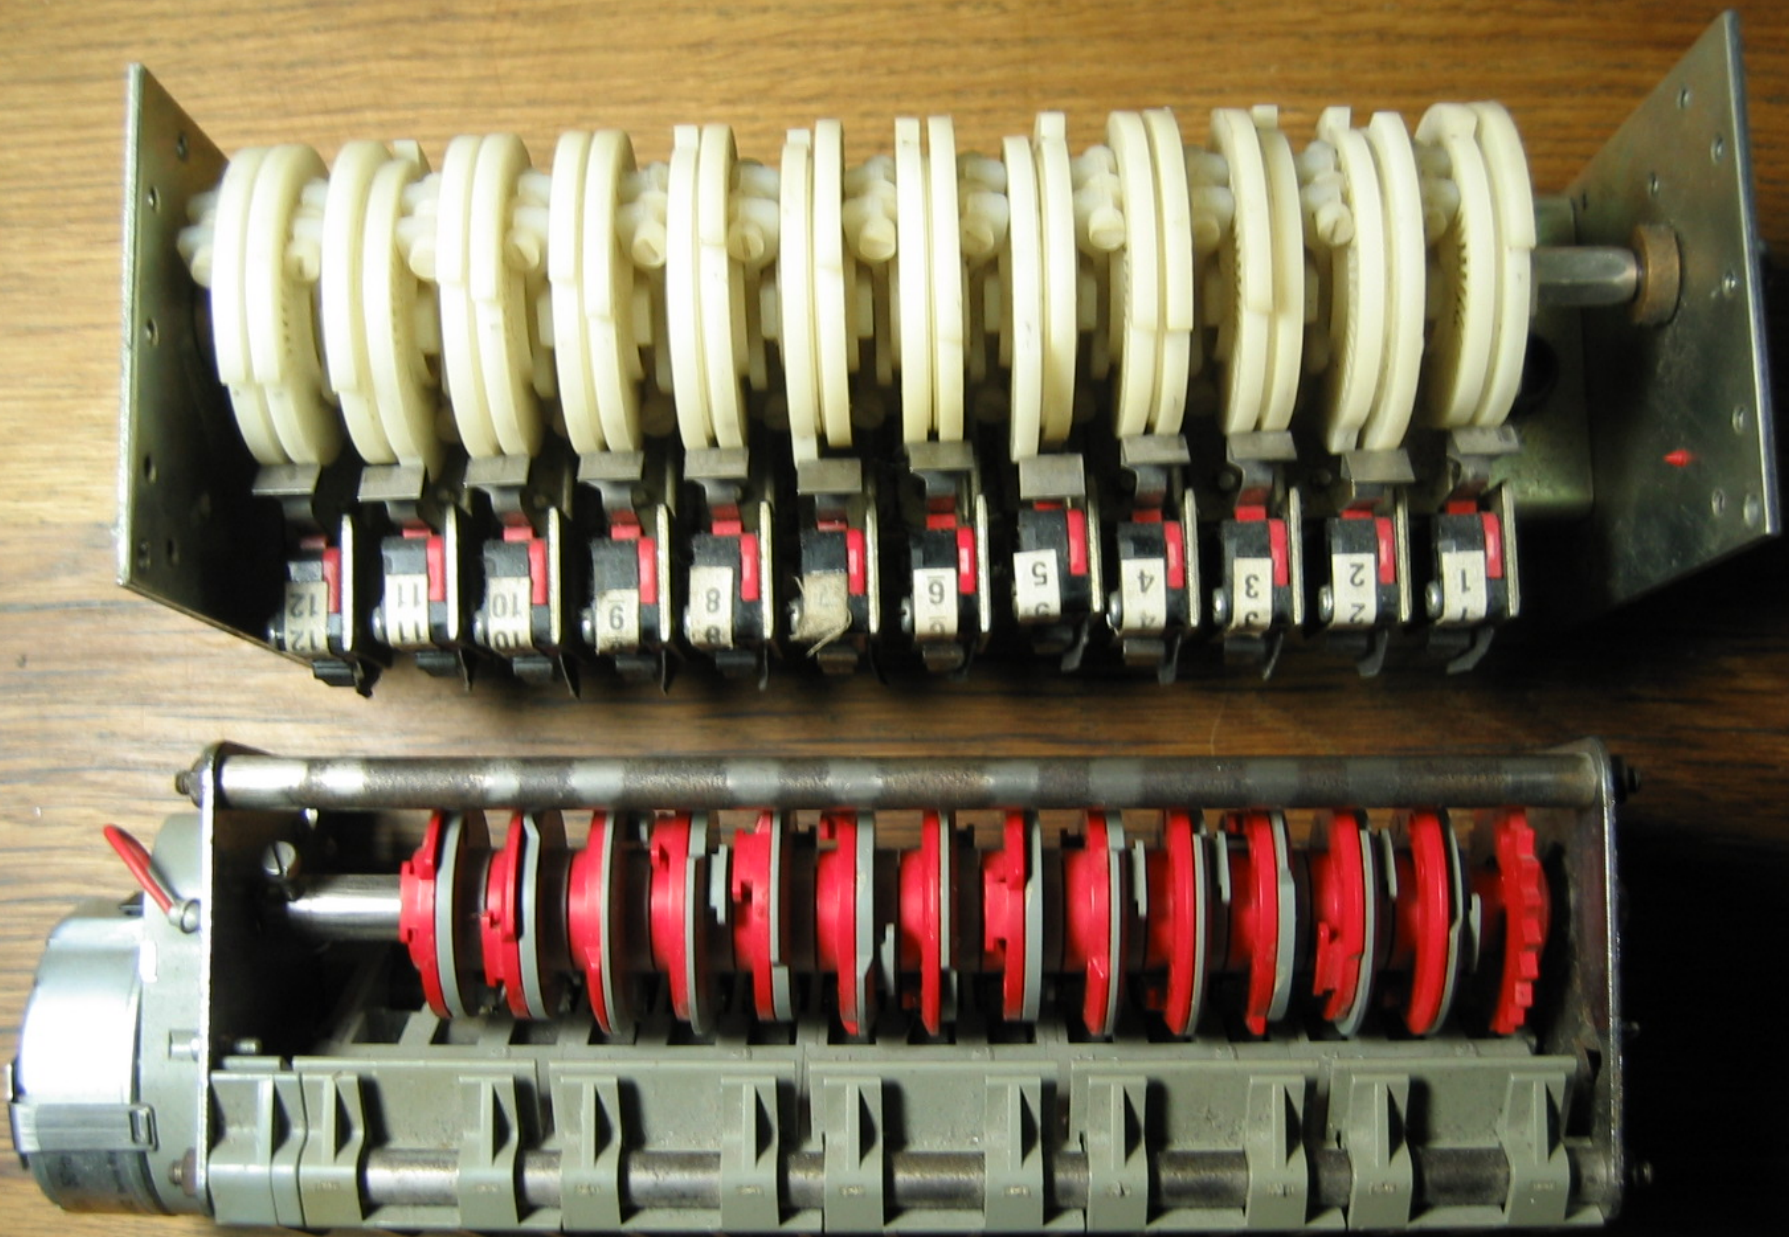











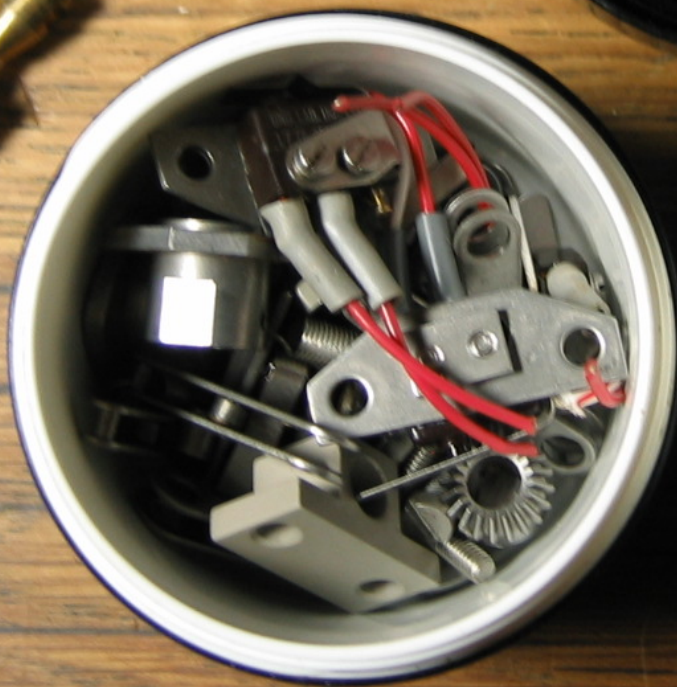







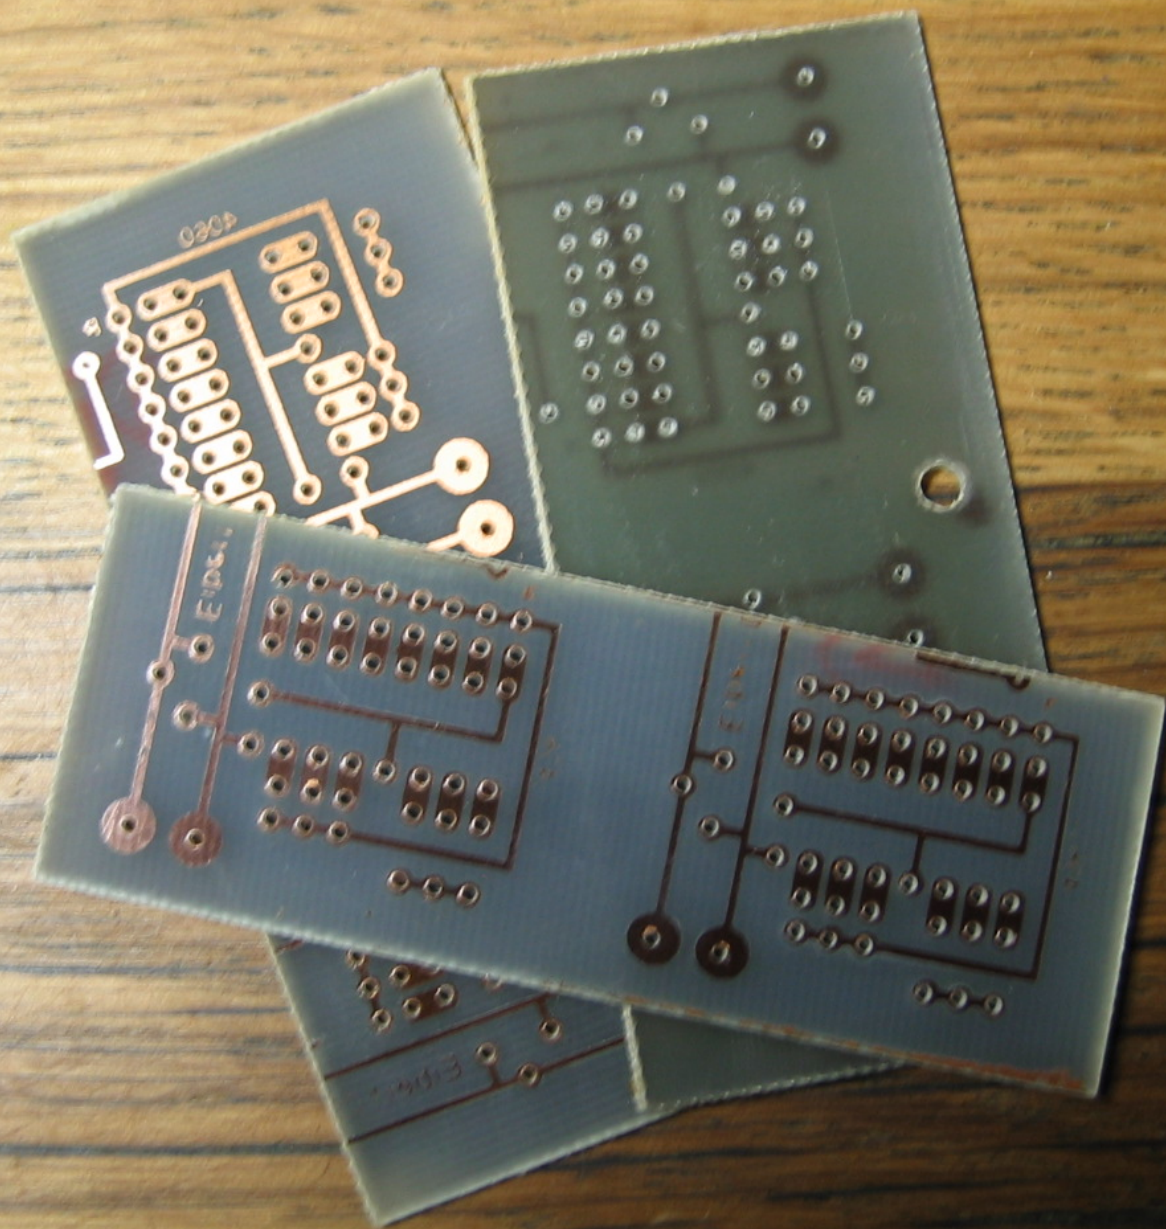
















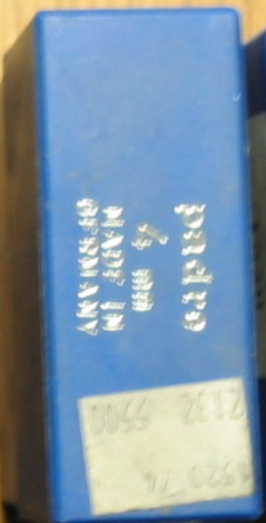





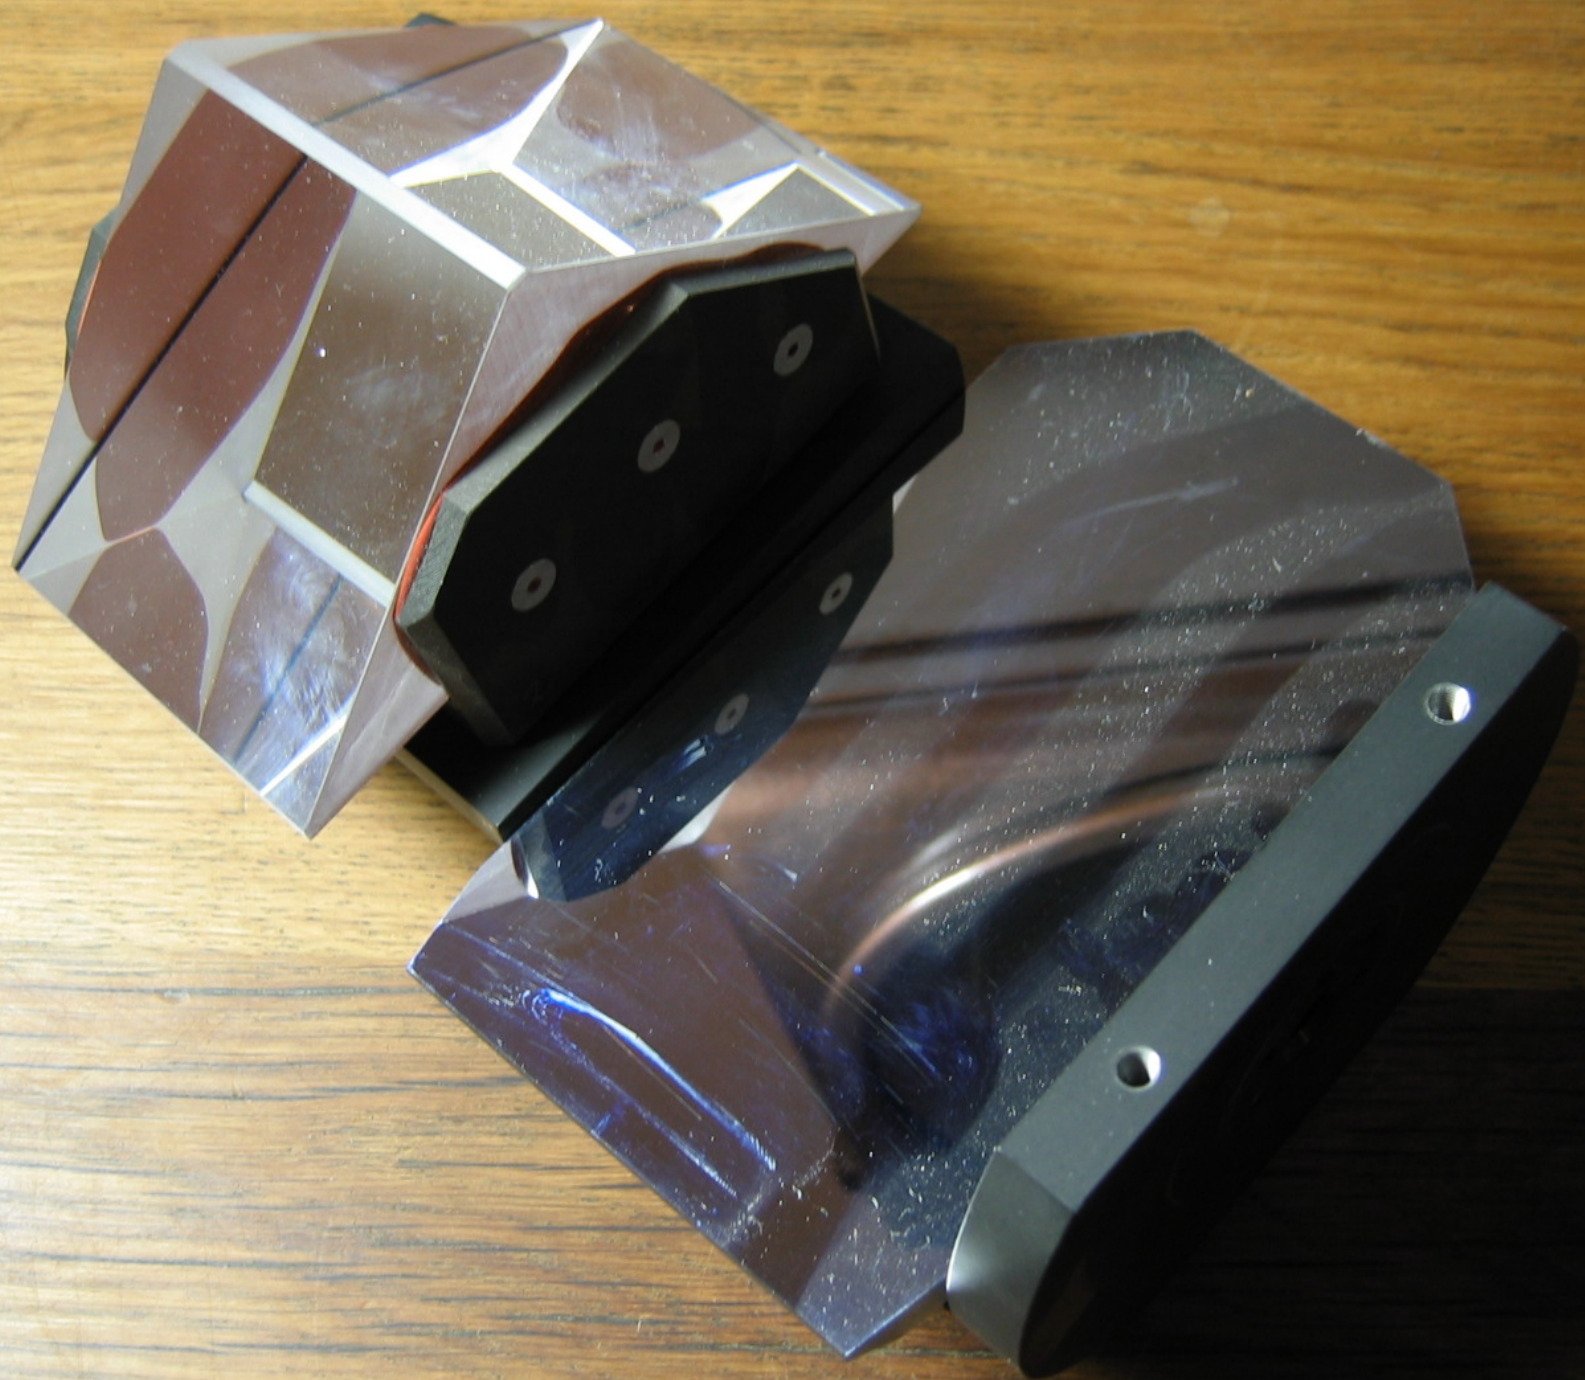

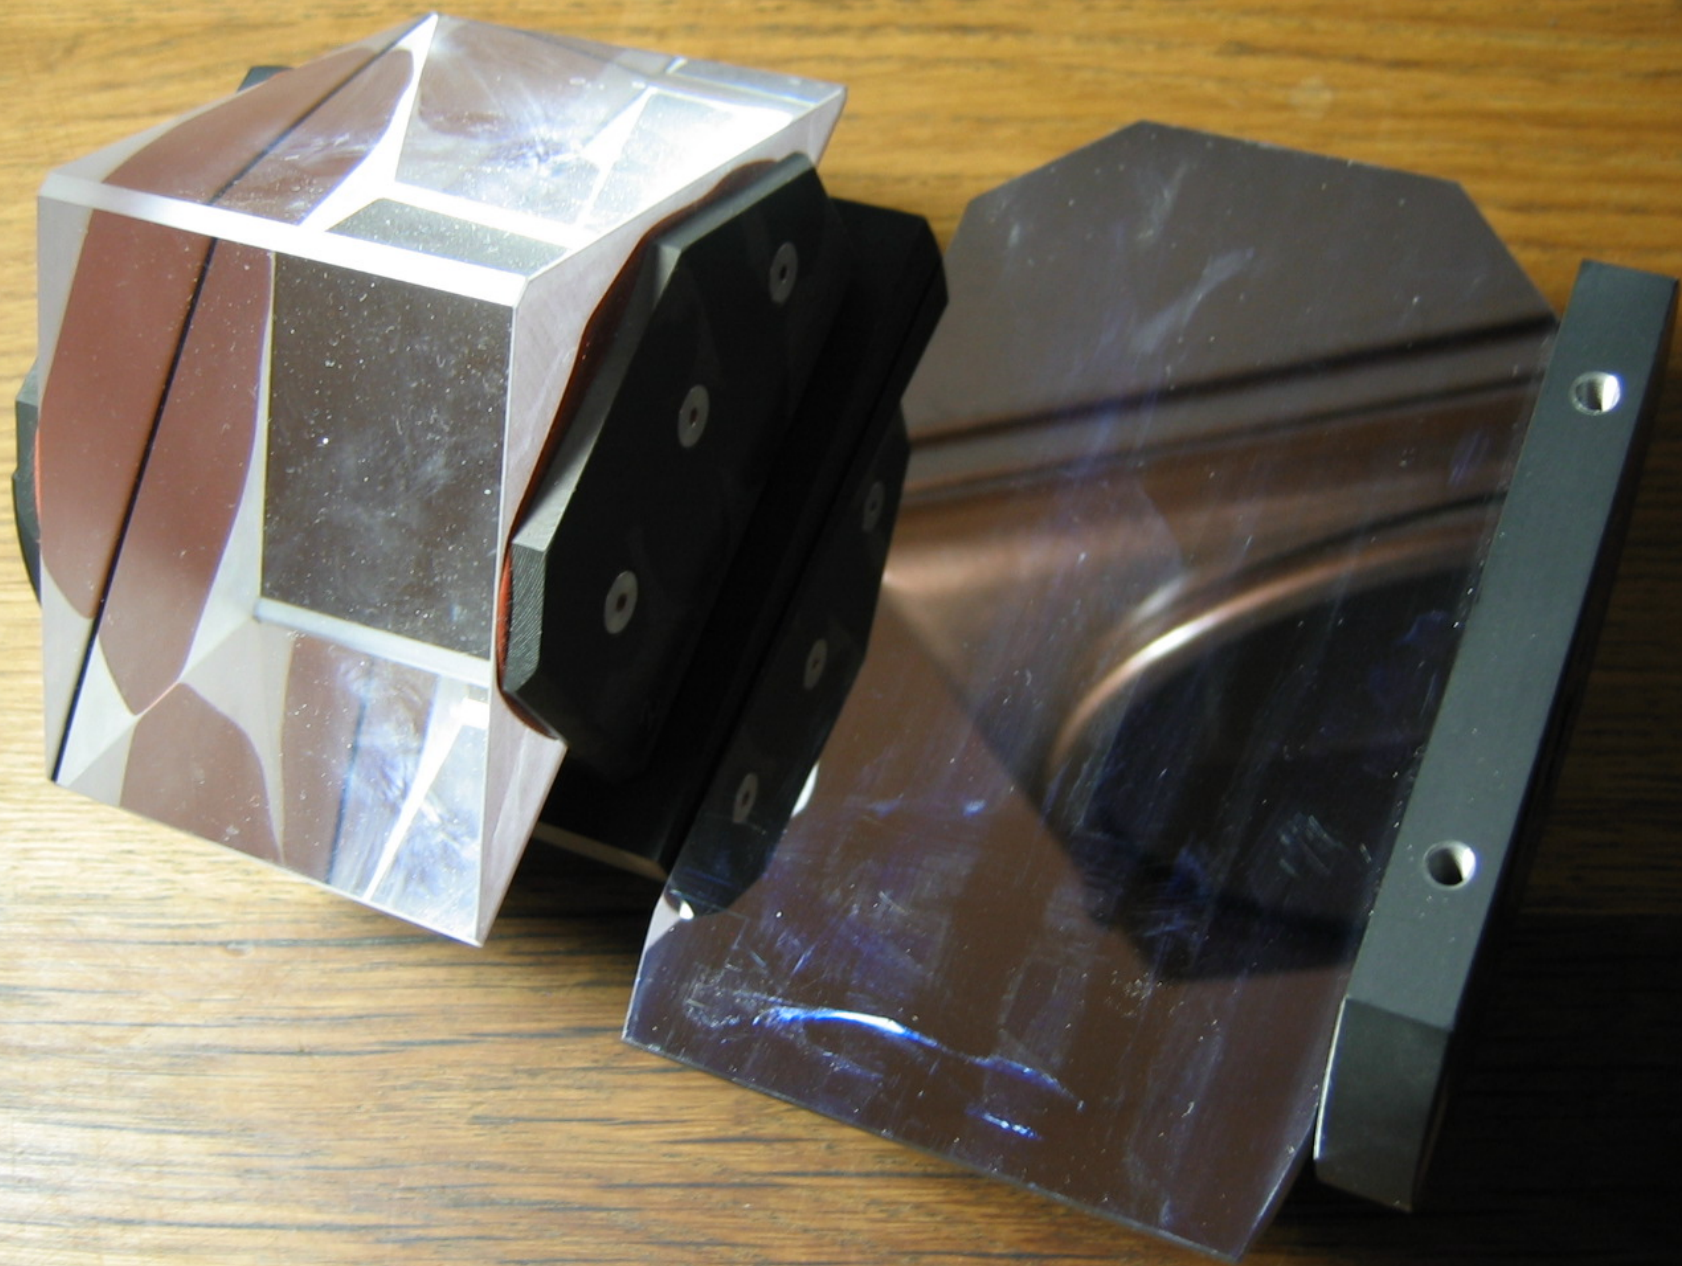












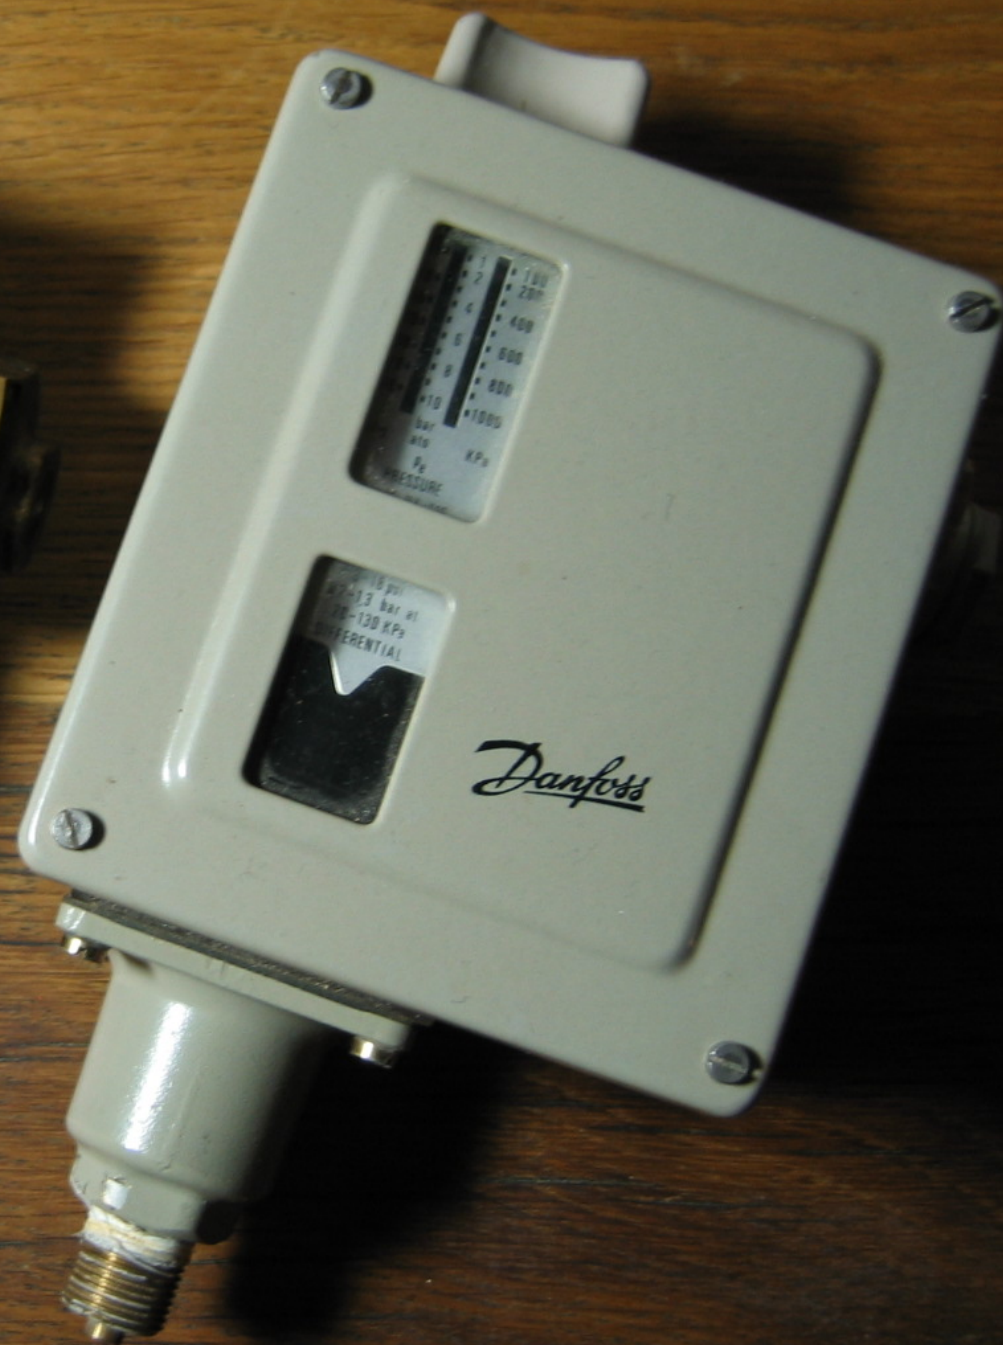





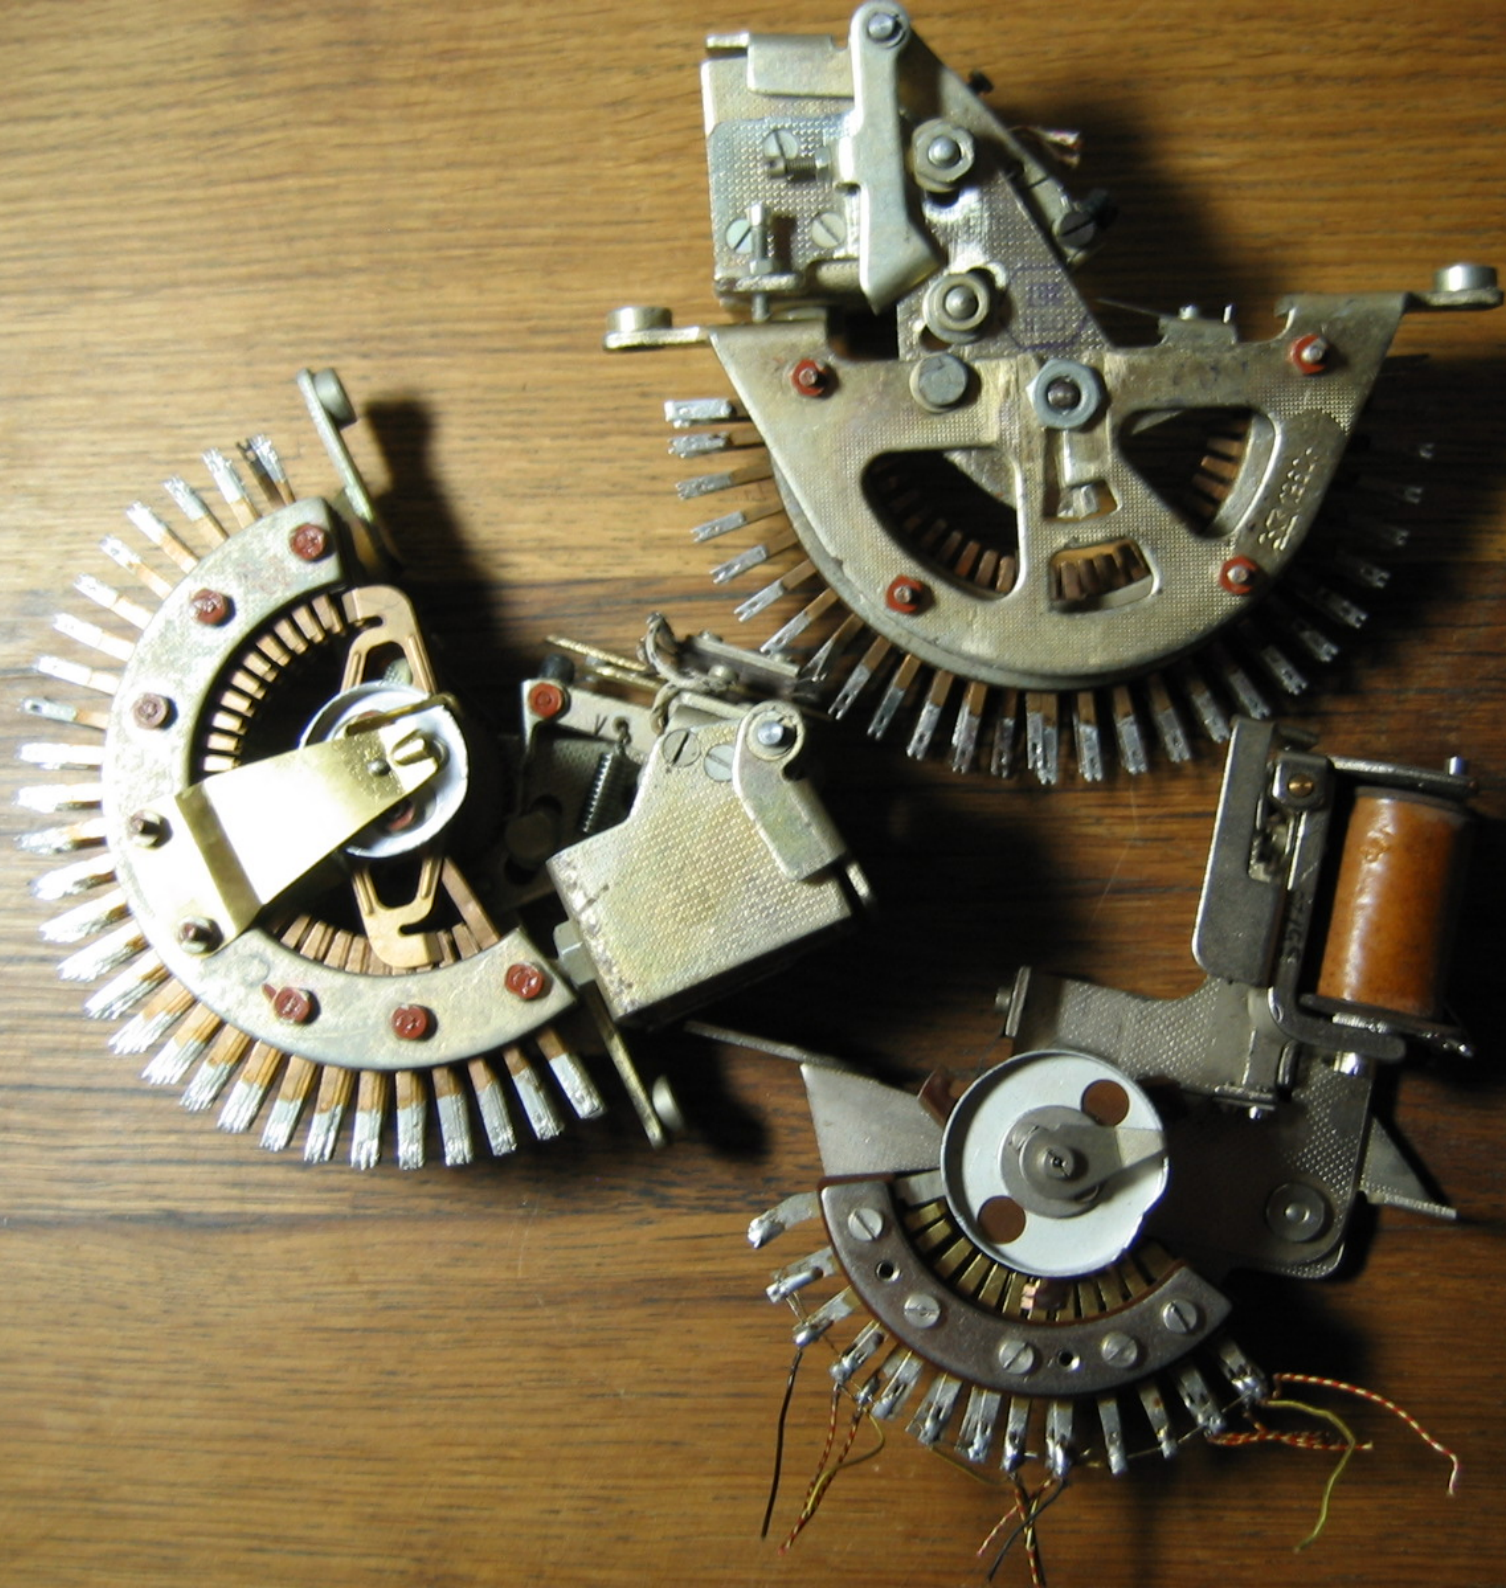

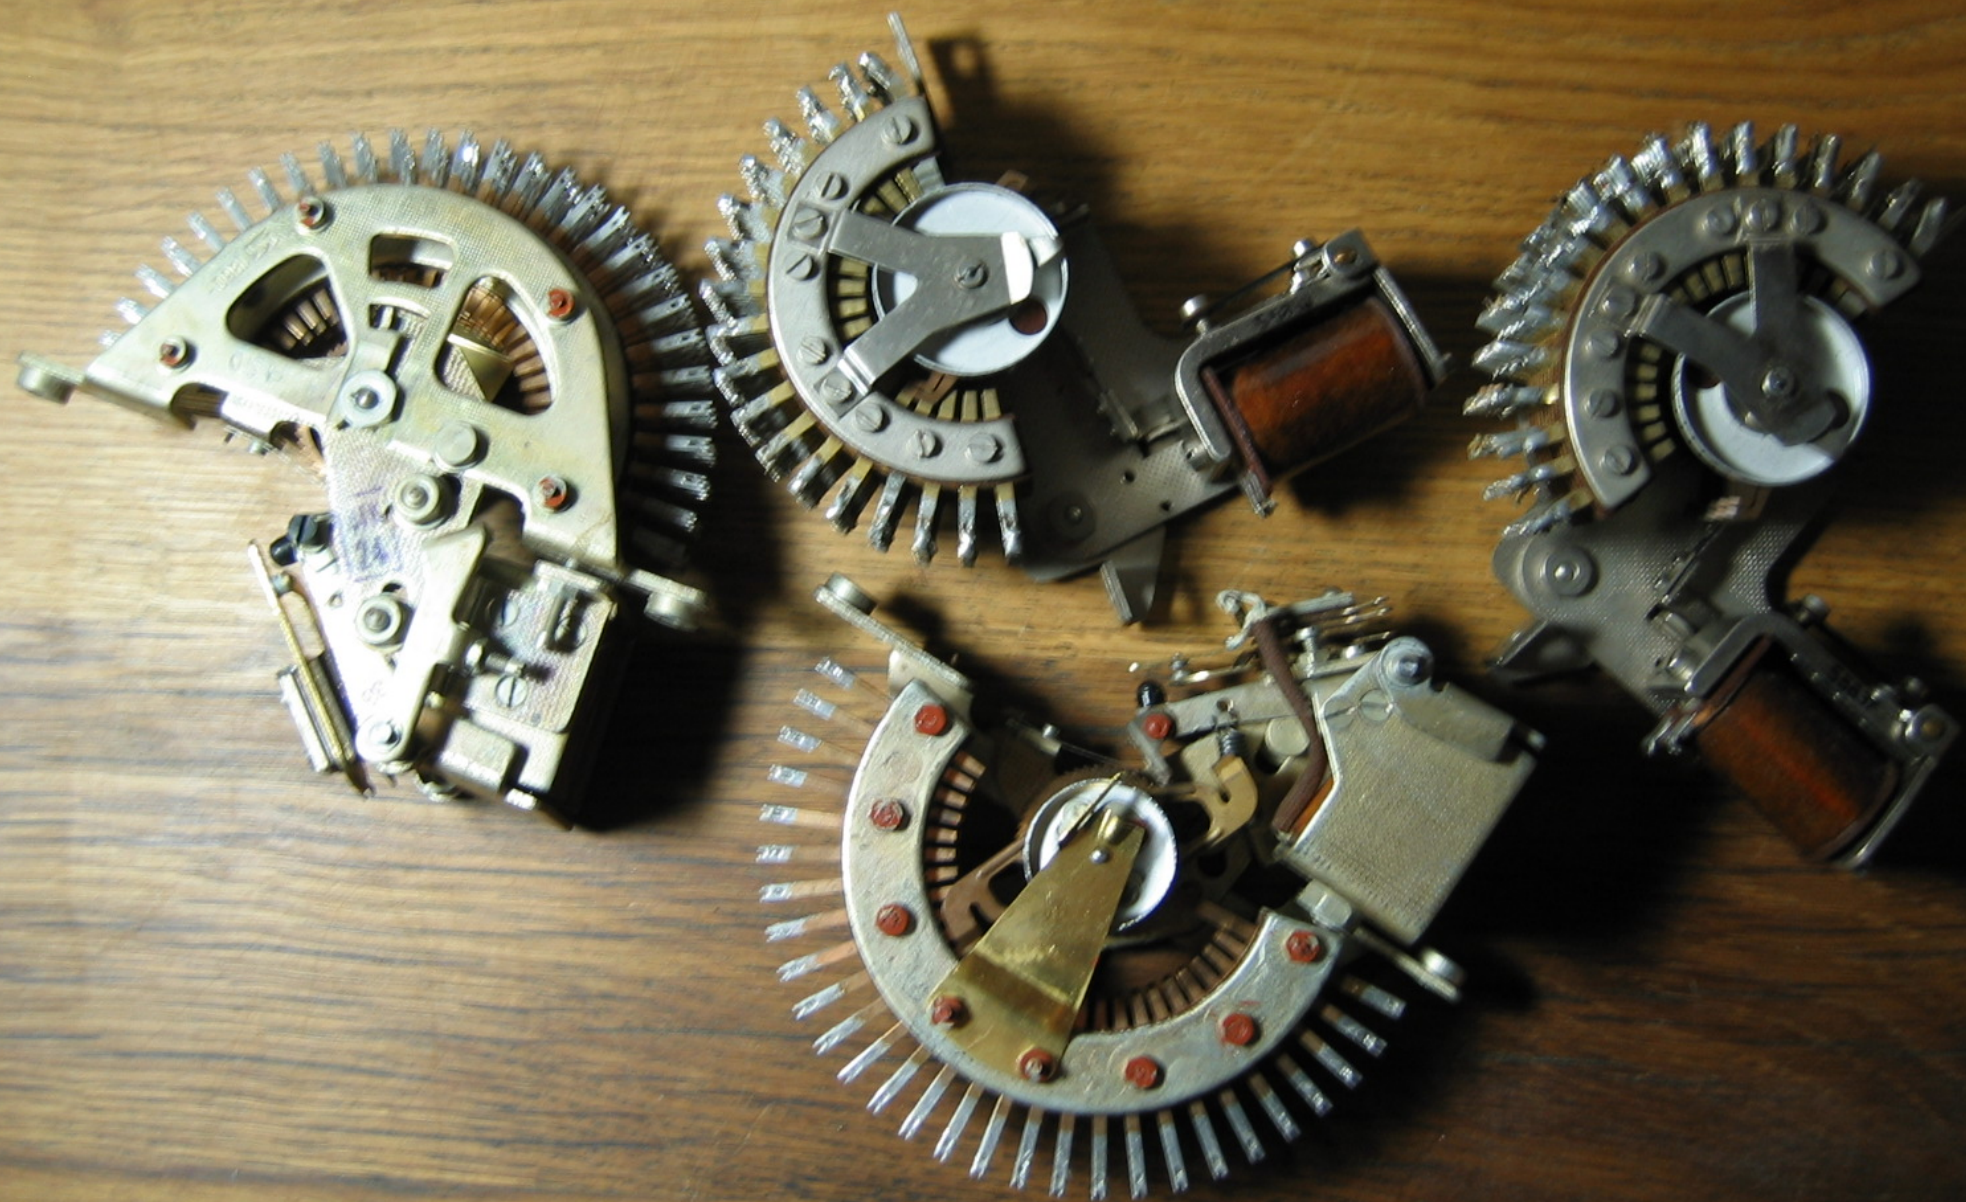































































SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18

SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18

SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18


SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18


SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18


SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18


SP 1297-20
82 334 S
127 S 91250
CCW D
2 RPM
DC 50 %
W 3.8
V 2.8
Hz 50
mA 18




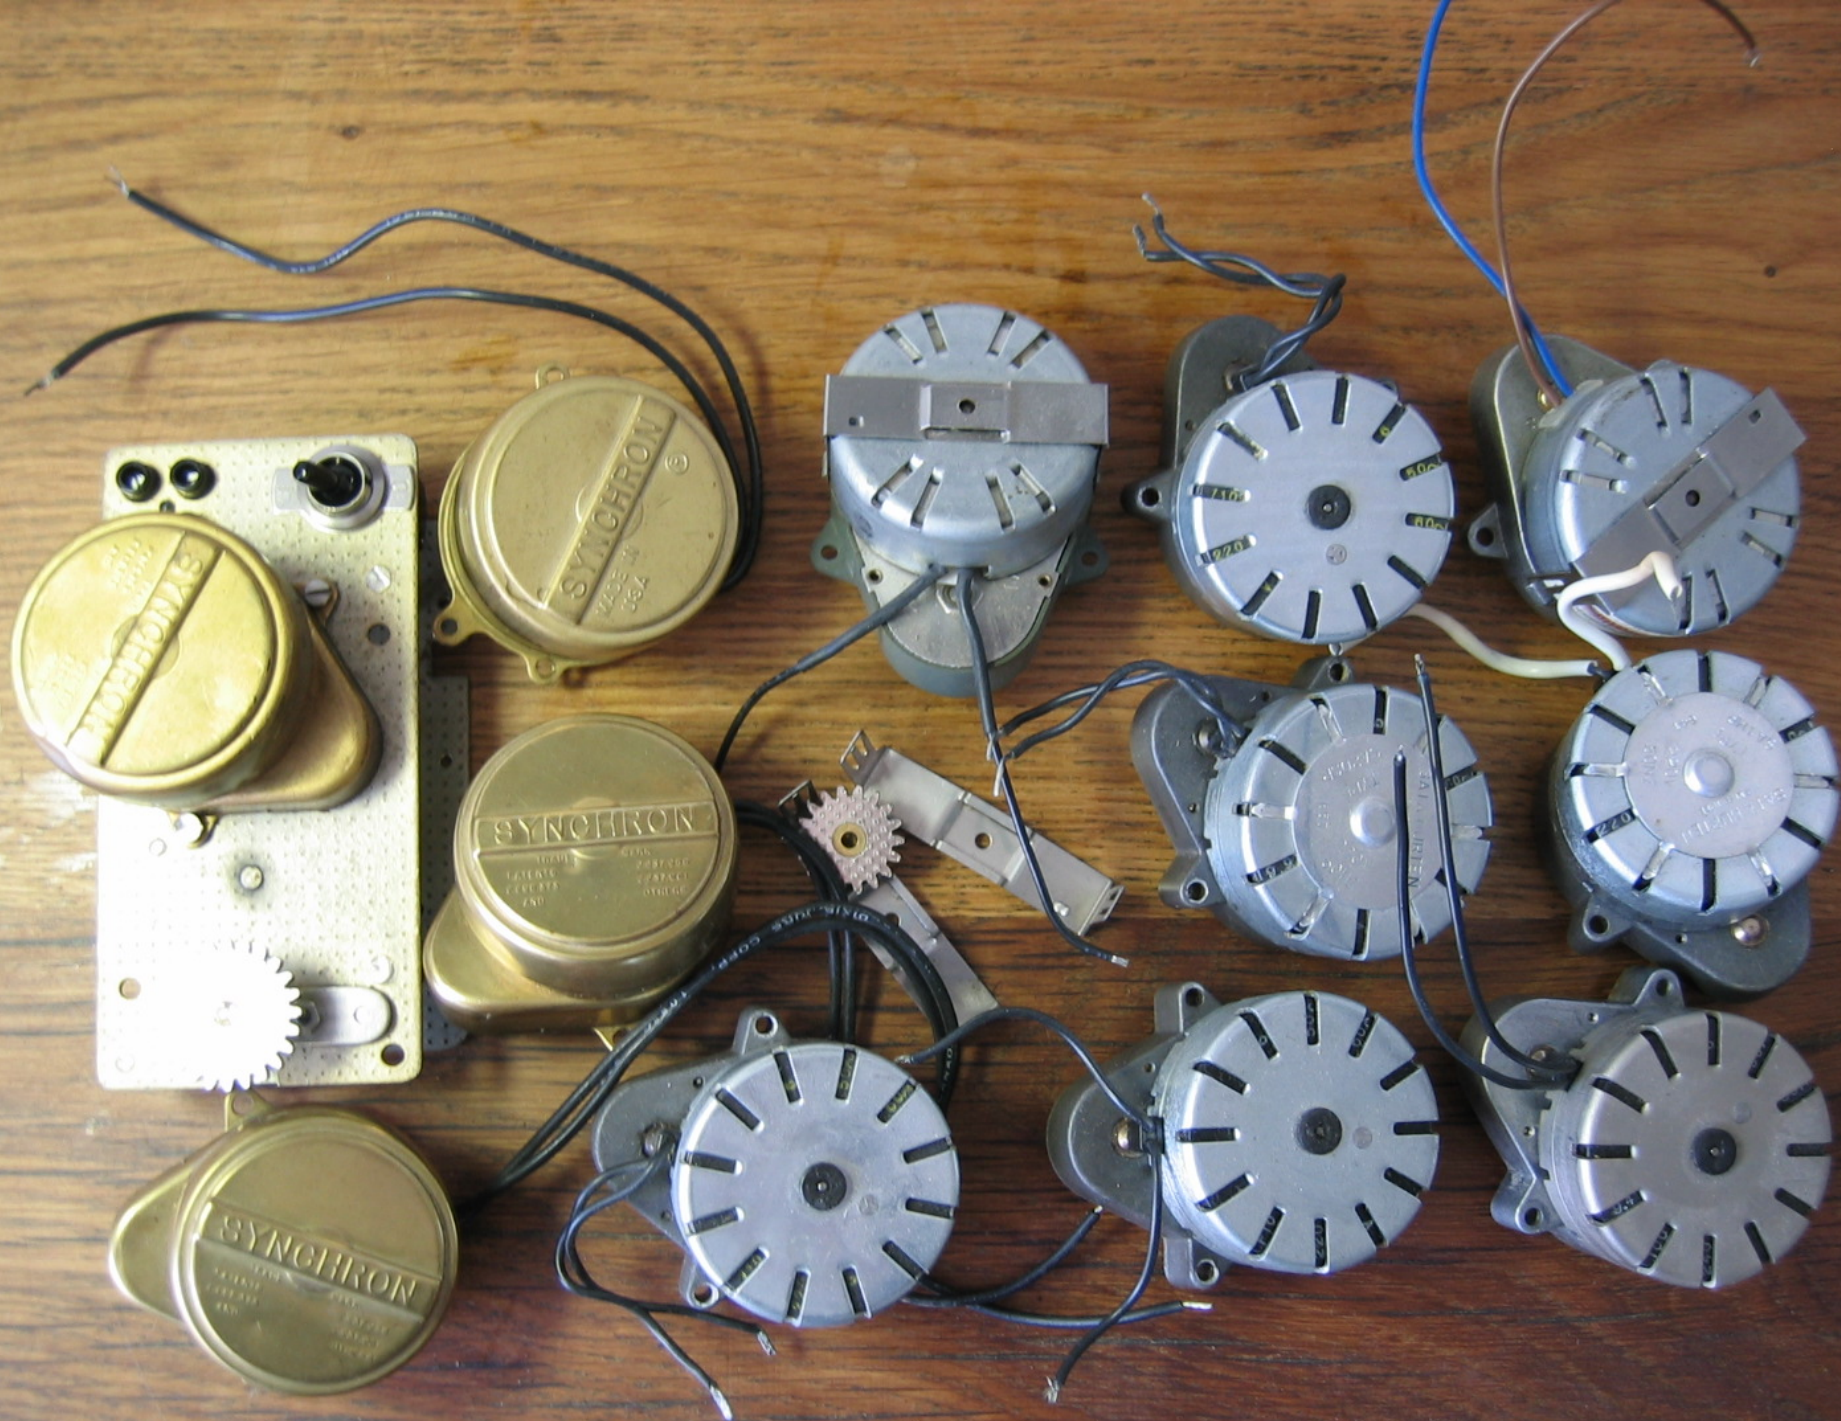

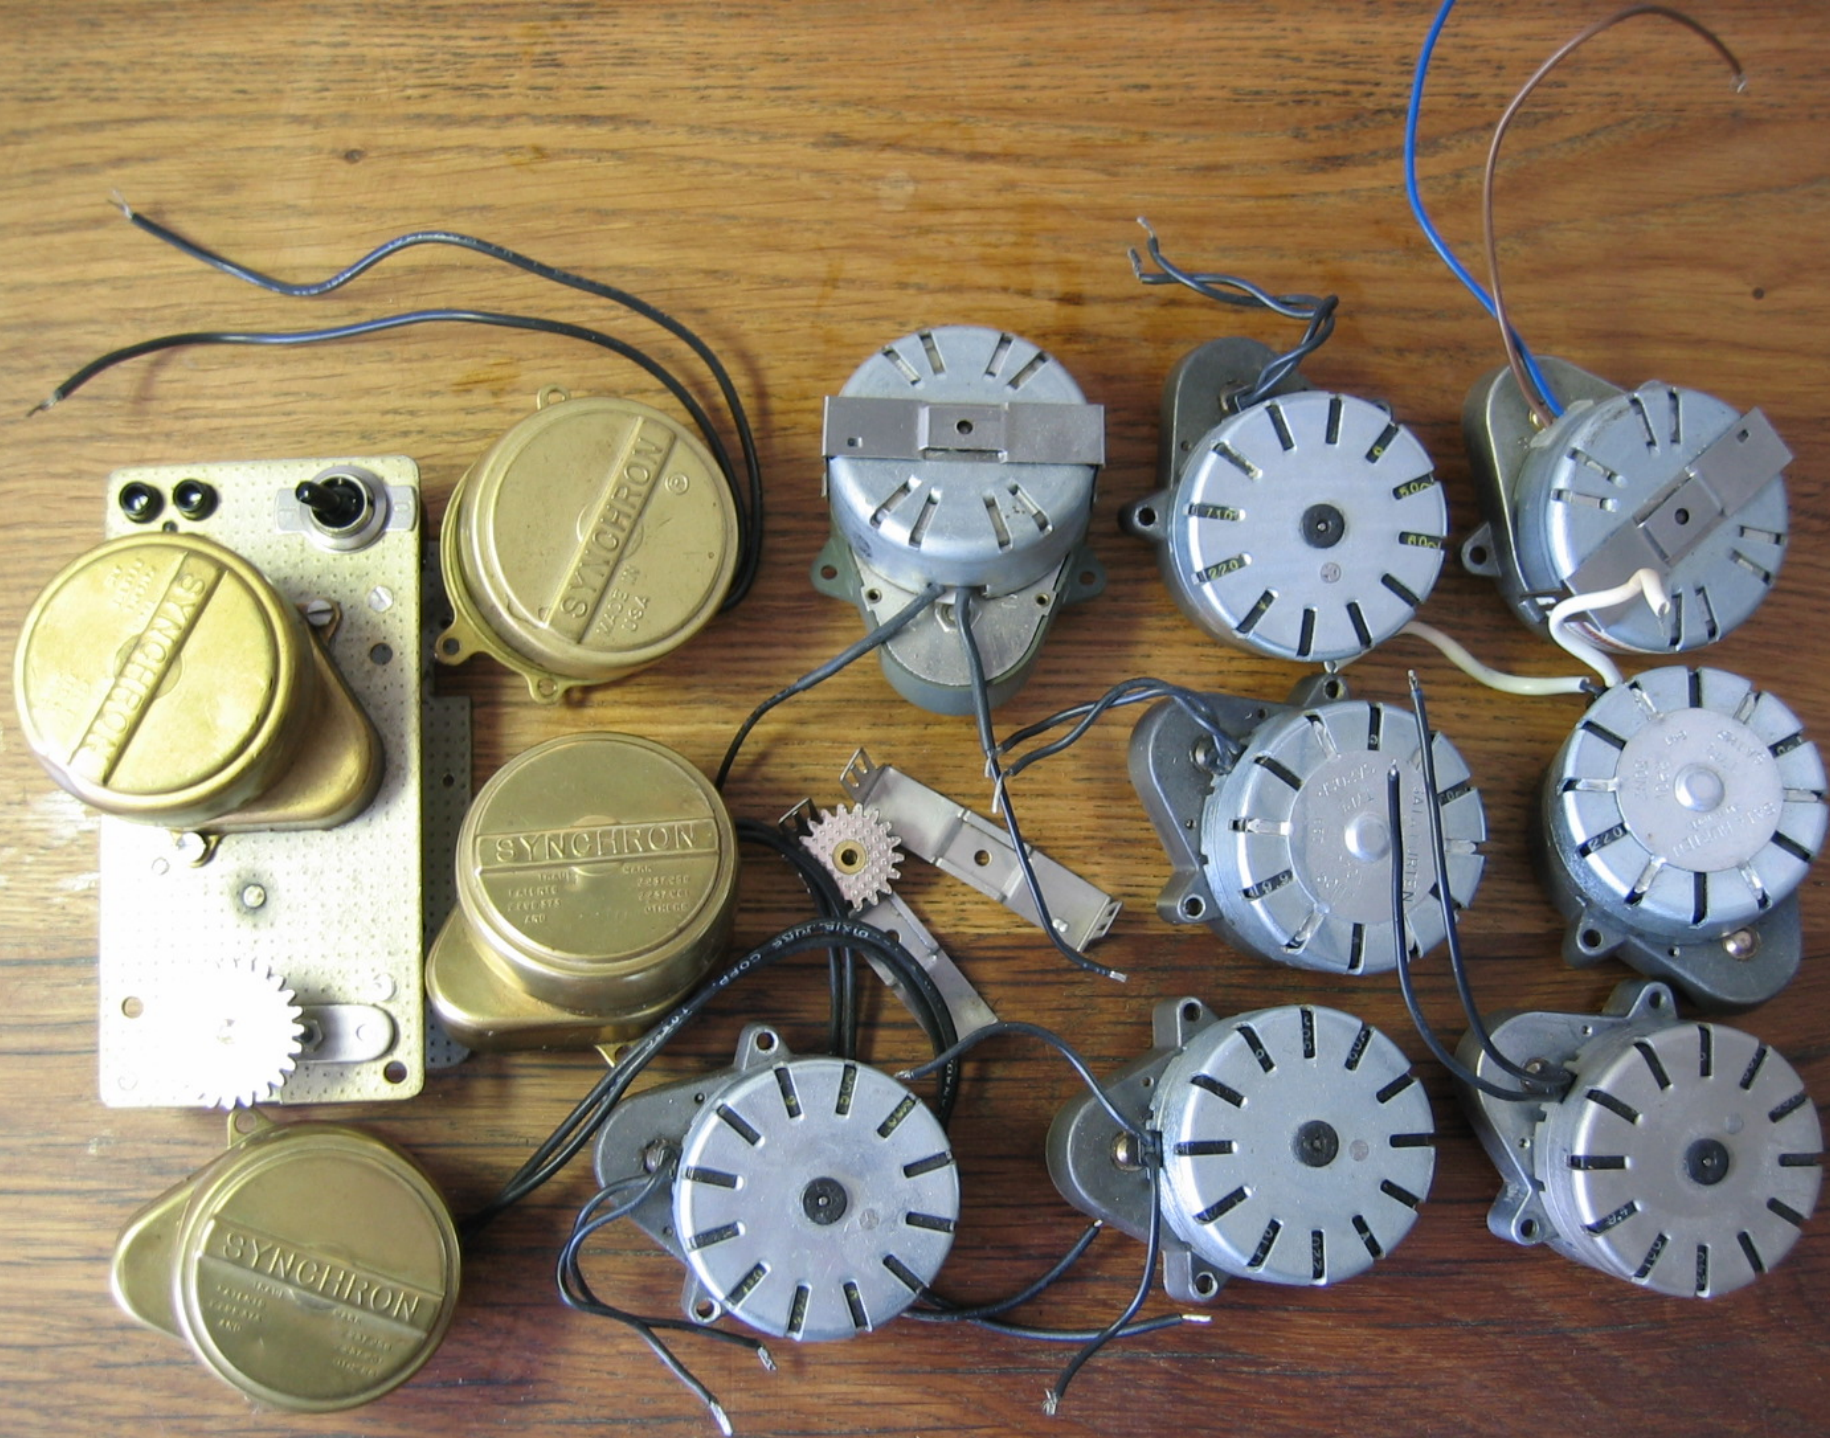

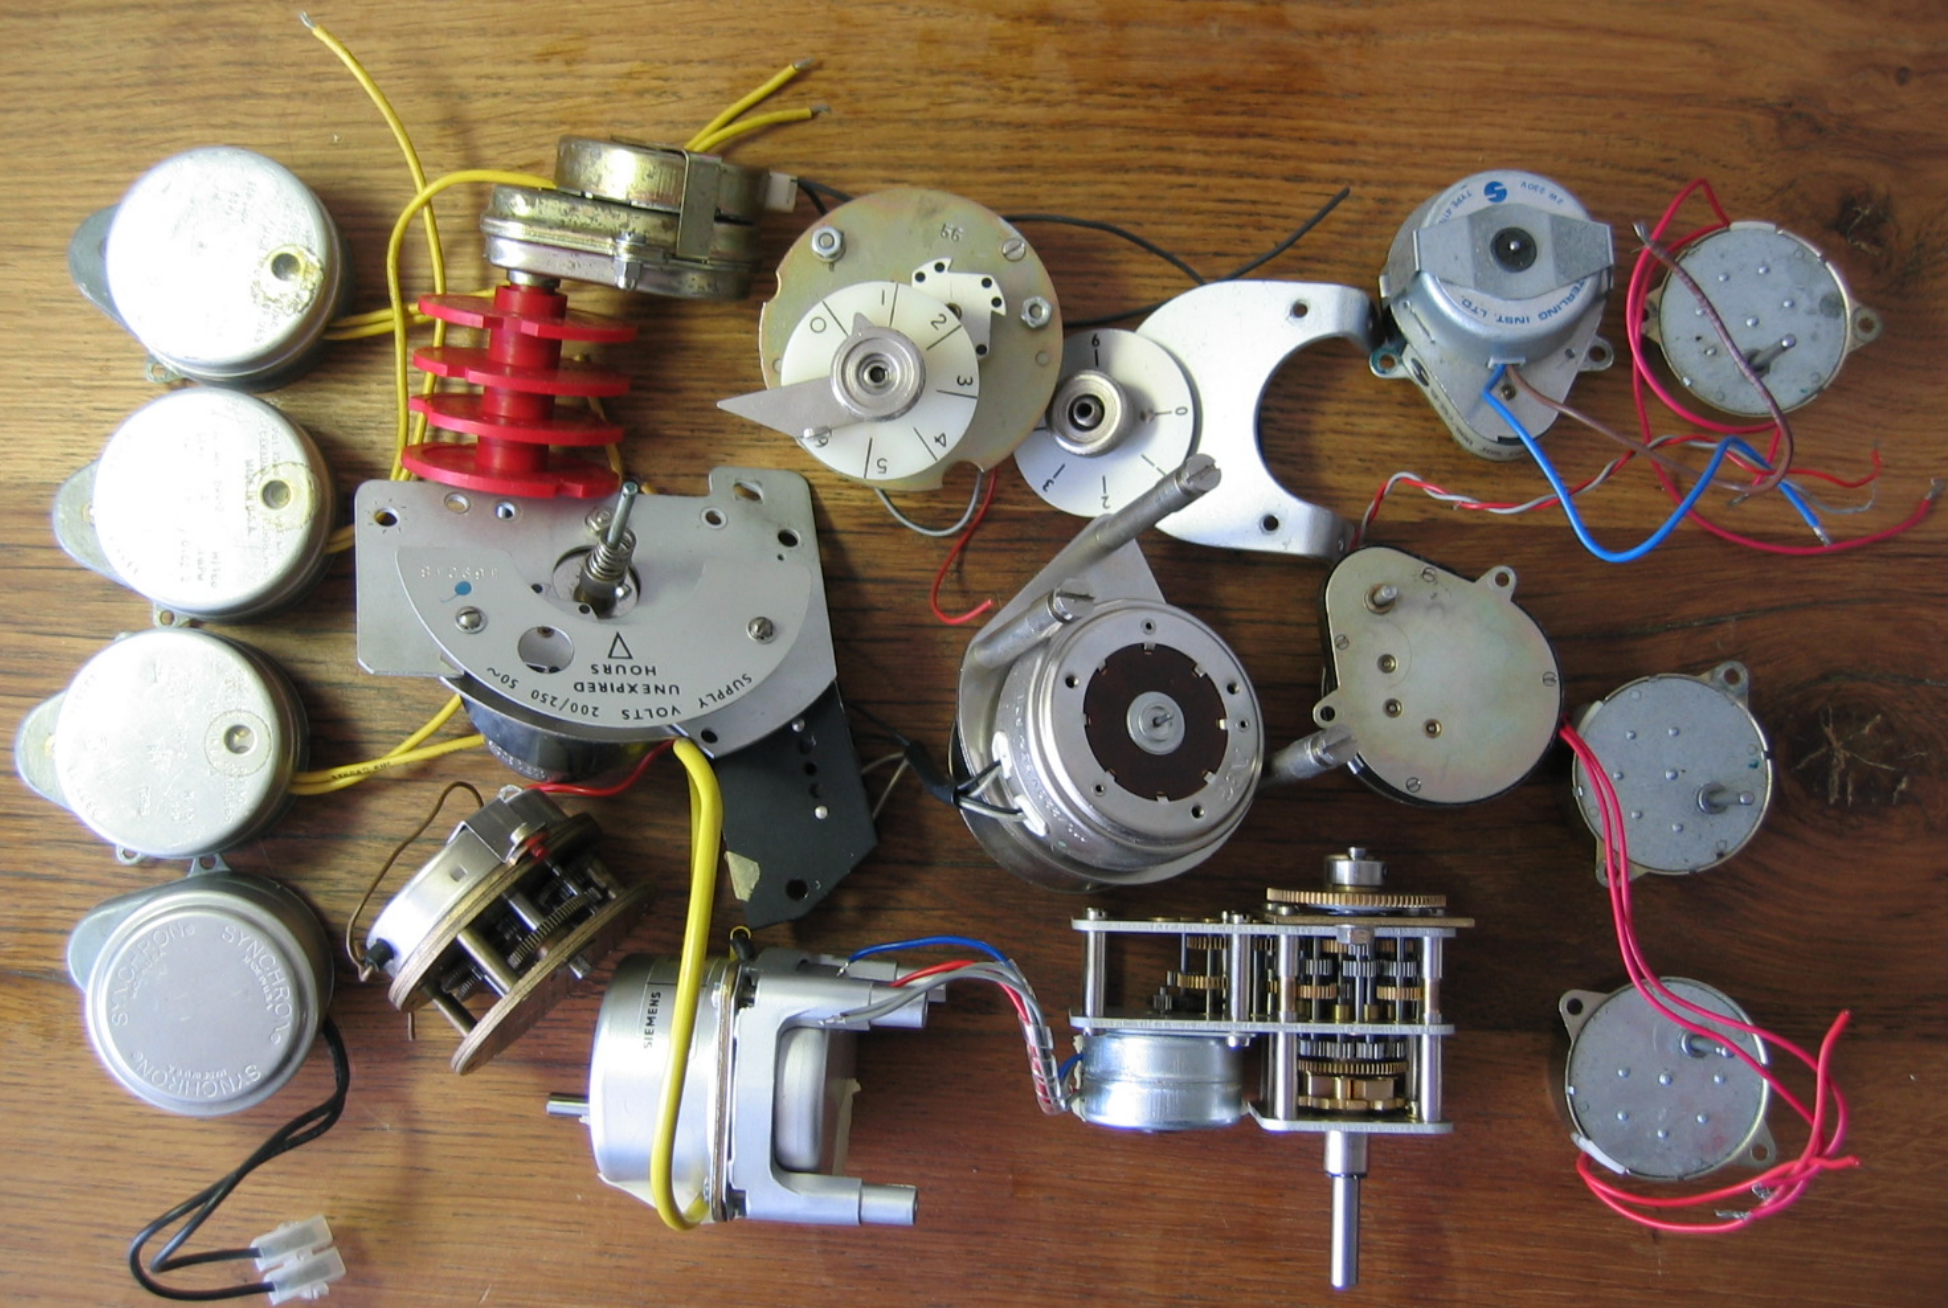

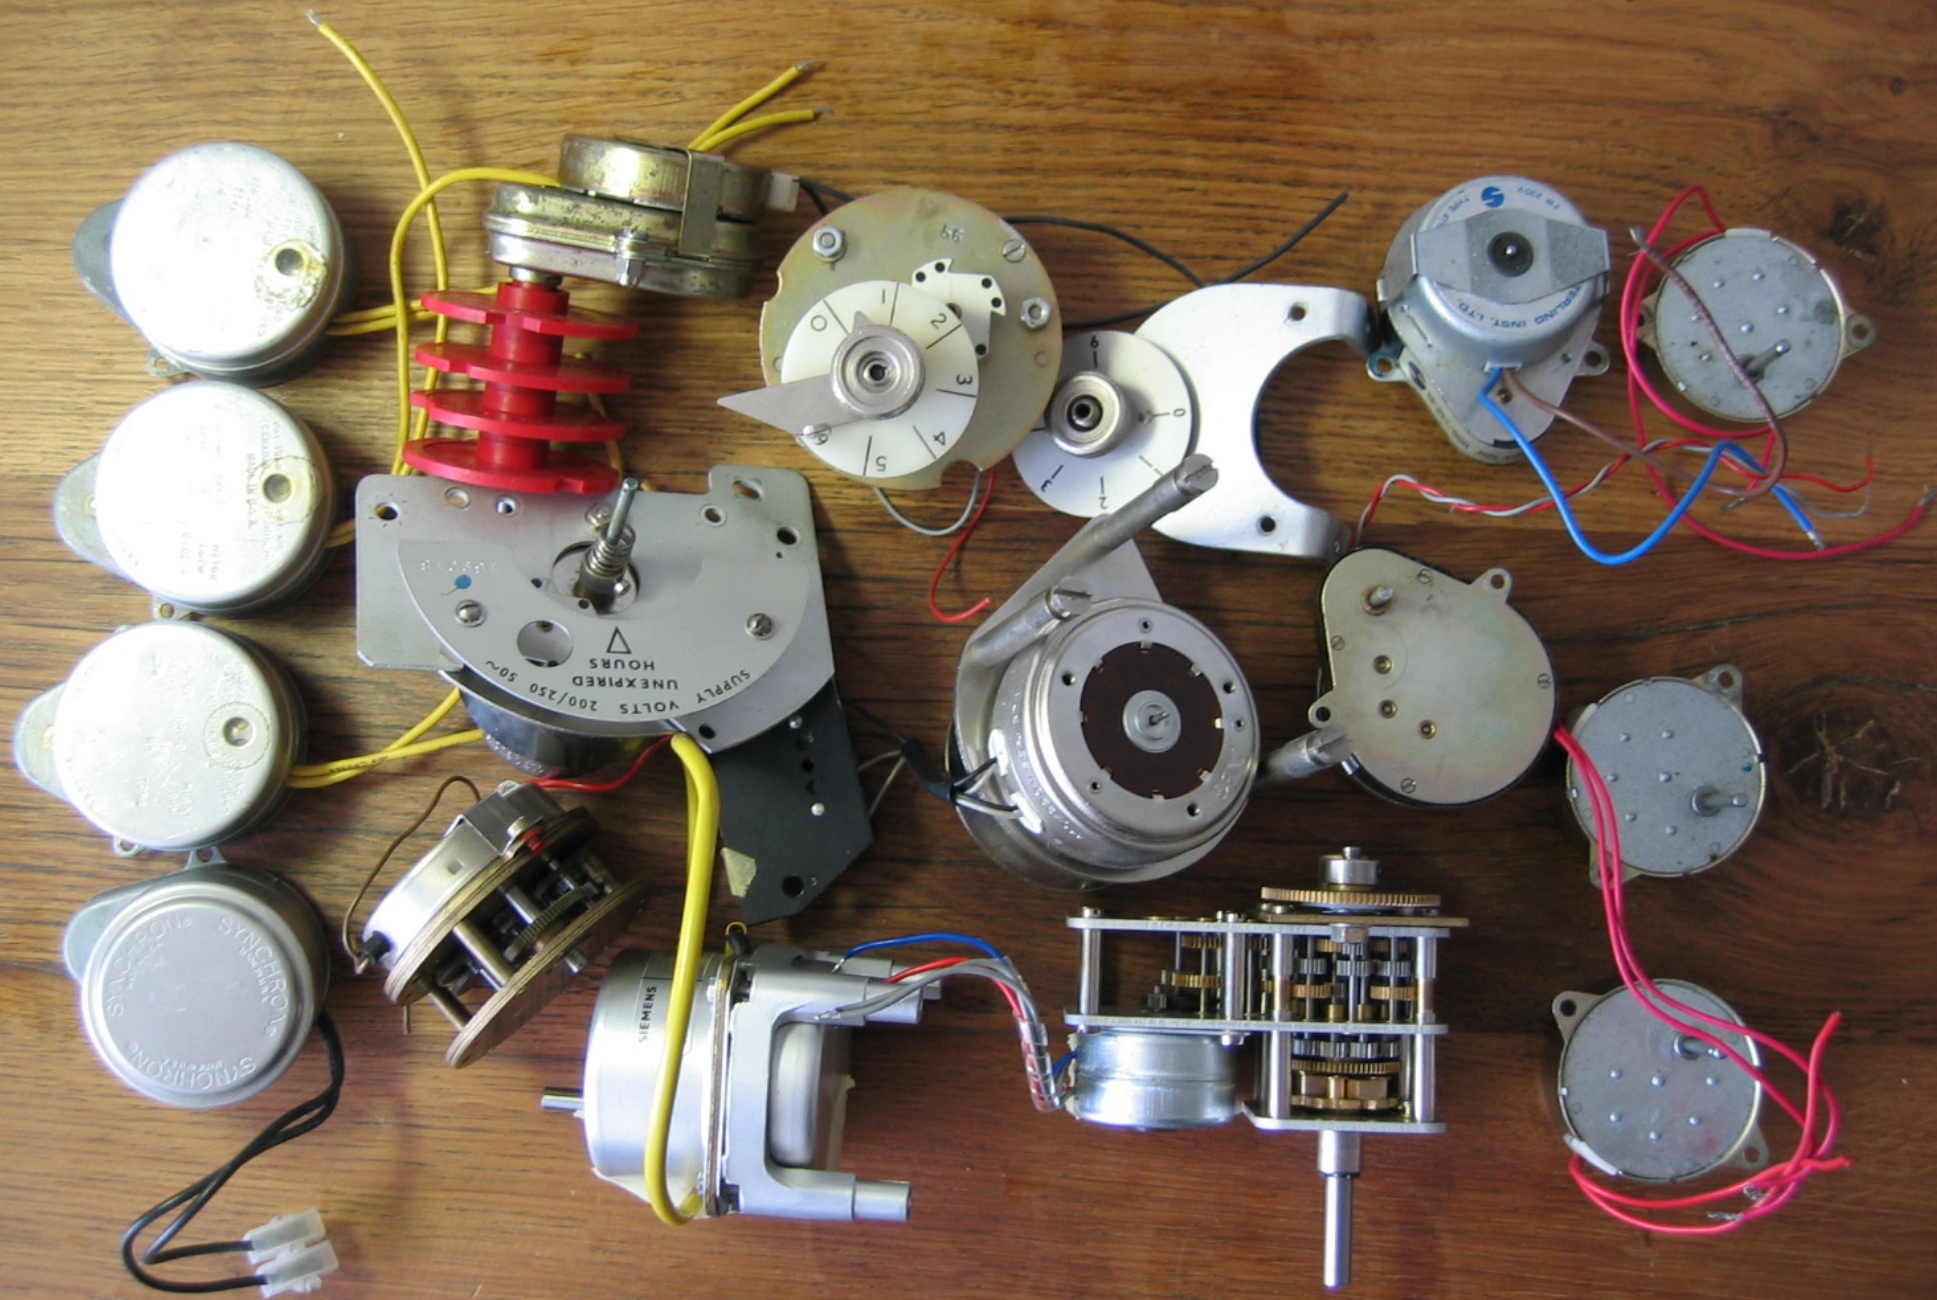

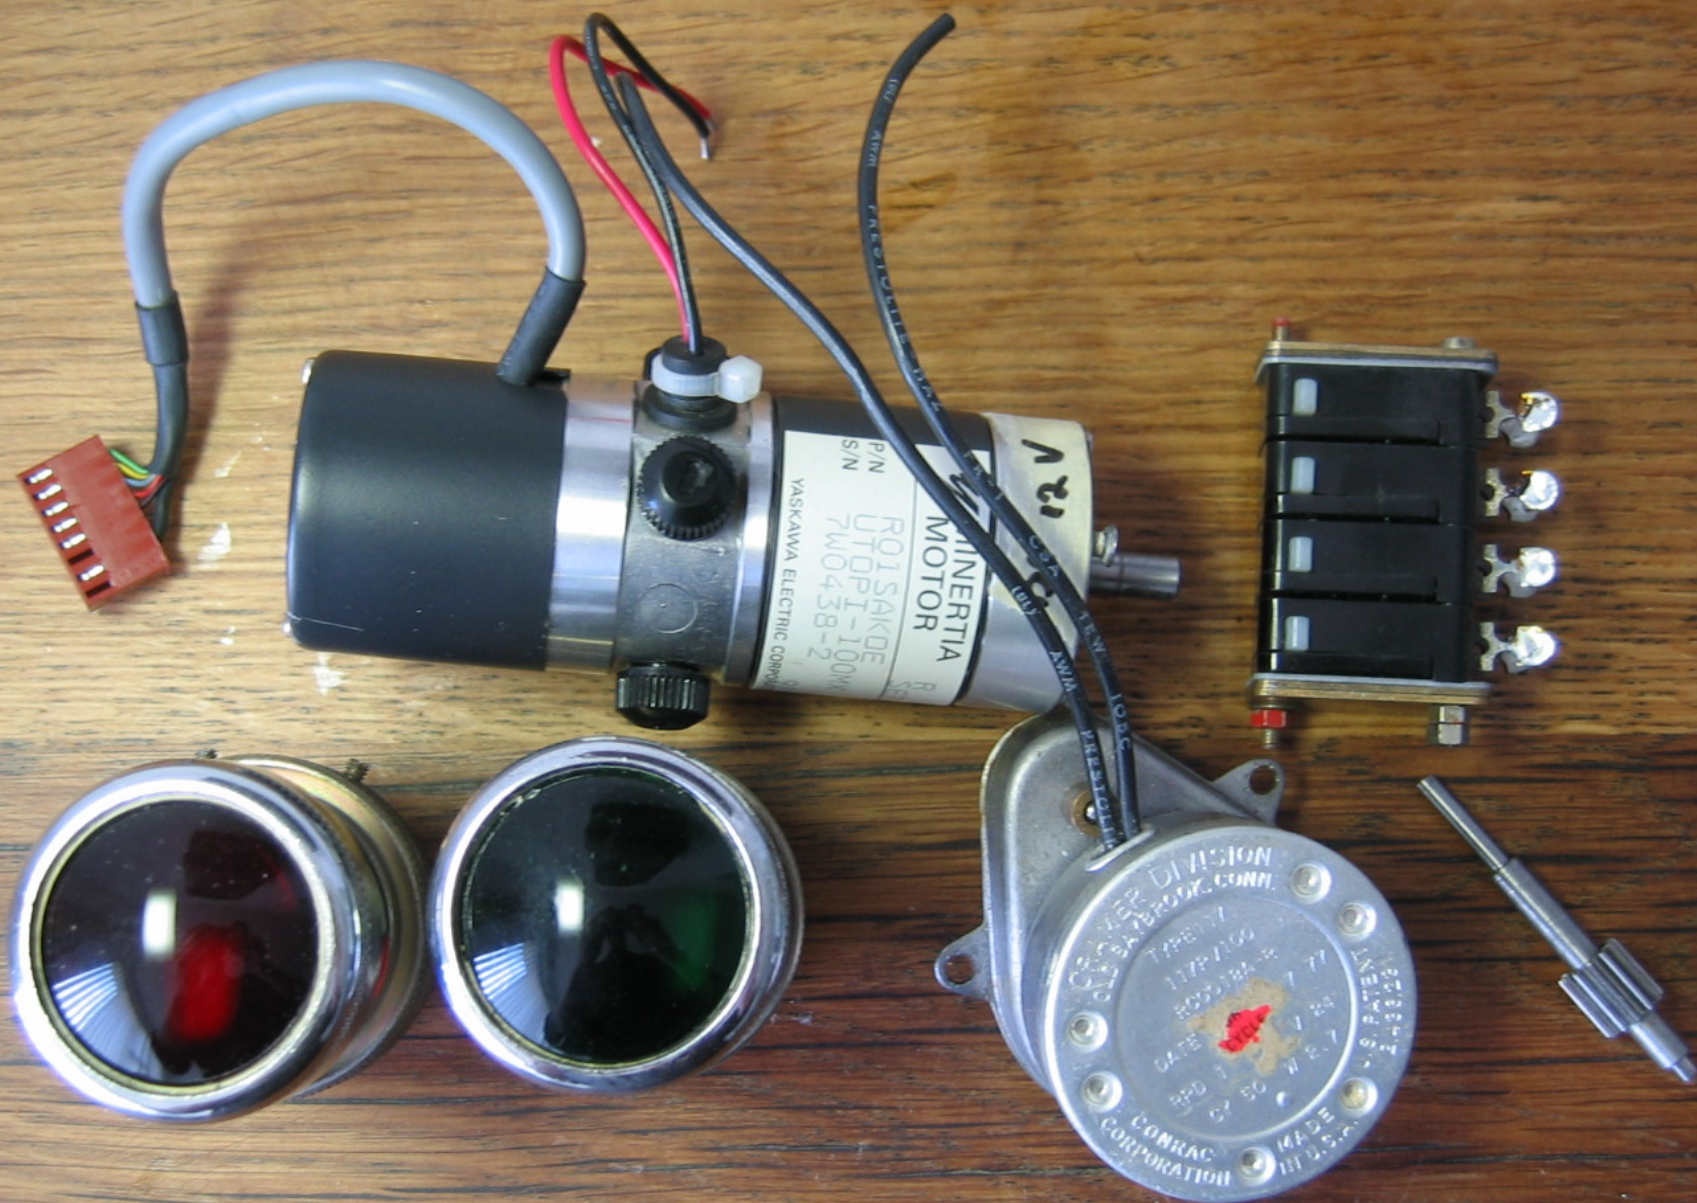













NEUBERGER

221707

STUNDEN

220V 50~

17032 - 51113












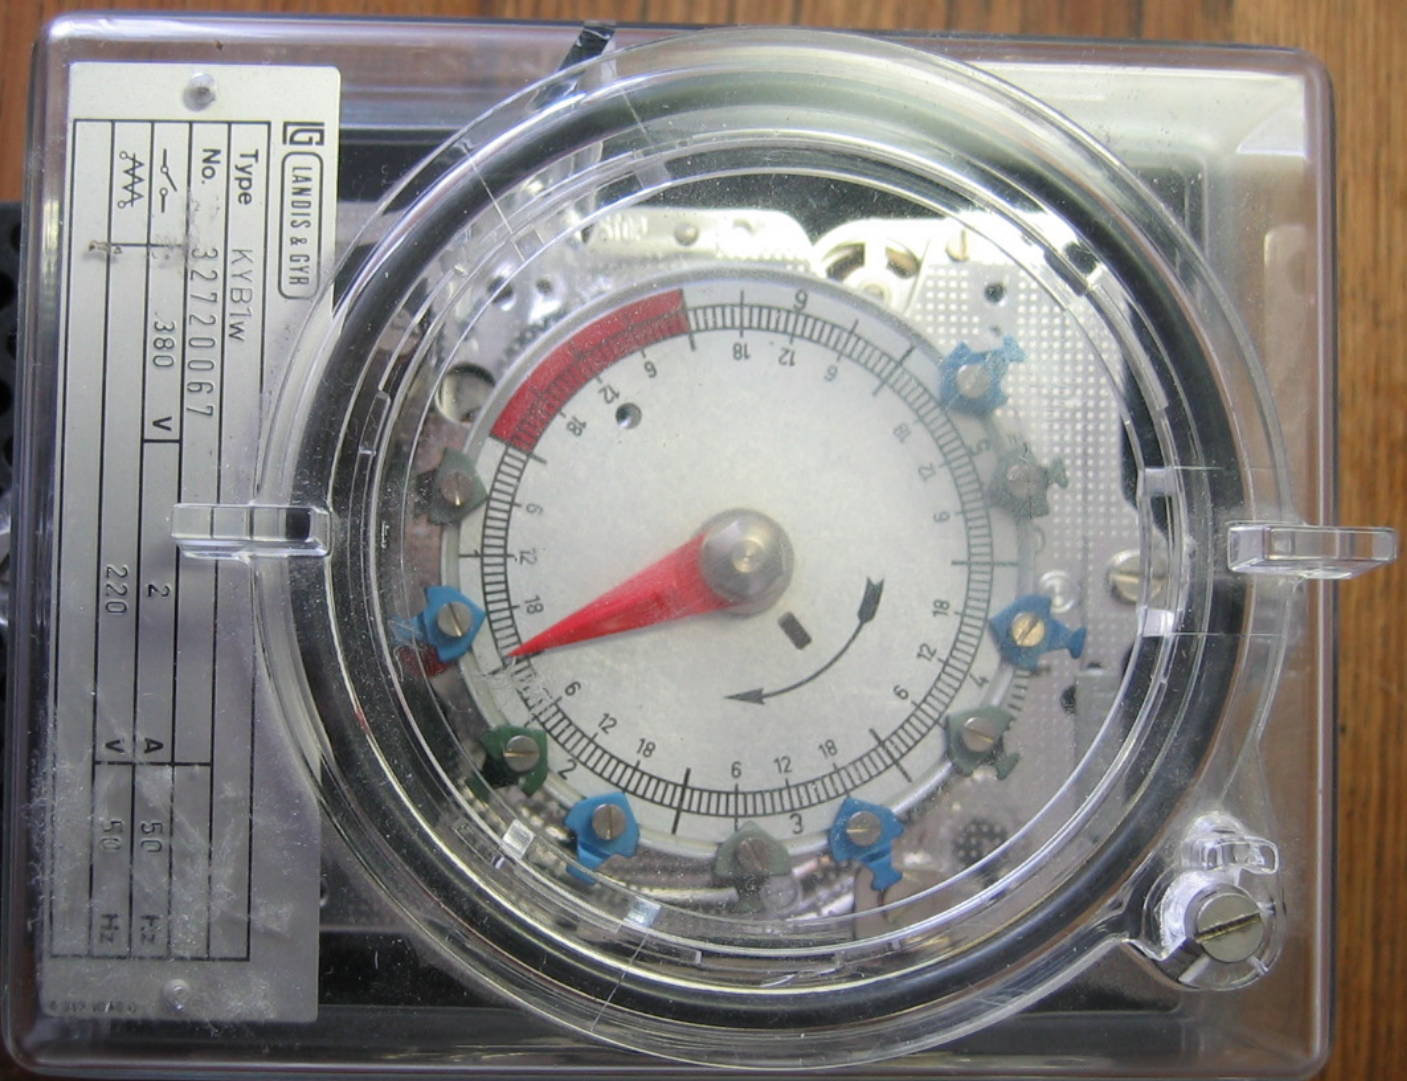

LANDIS & GYR

Type	KYB1W			
No.	32720067			
	380	V	2	A
	220	V	50	Hz



SAUTER

Groenpol
Amsterdam

Type	CE 450	A-Nr	
Nr	6109-1728	W	
V	380	A	2
V	220/380	Hz	50
		c/s	

Made in Switzerland



ZL 257013

SCHAKELKLOK


TYPE KYA1d No. 23041167

220 V 50 Hz


LANDIS & GYR, ZUG (Zwitzerland)





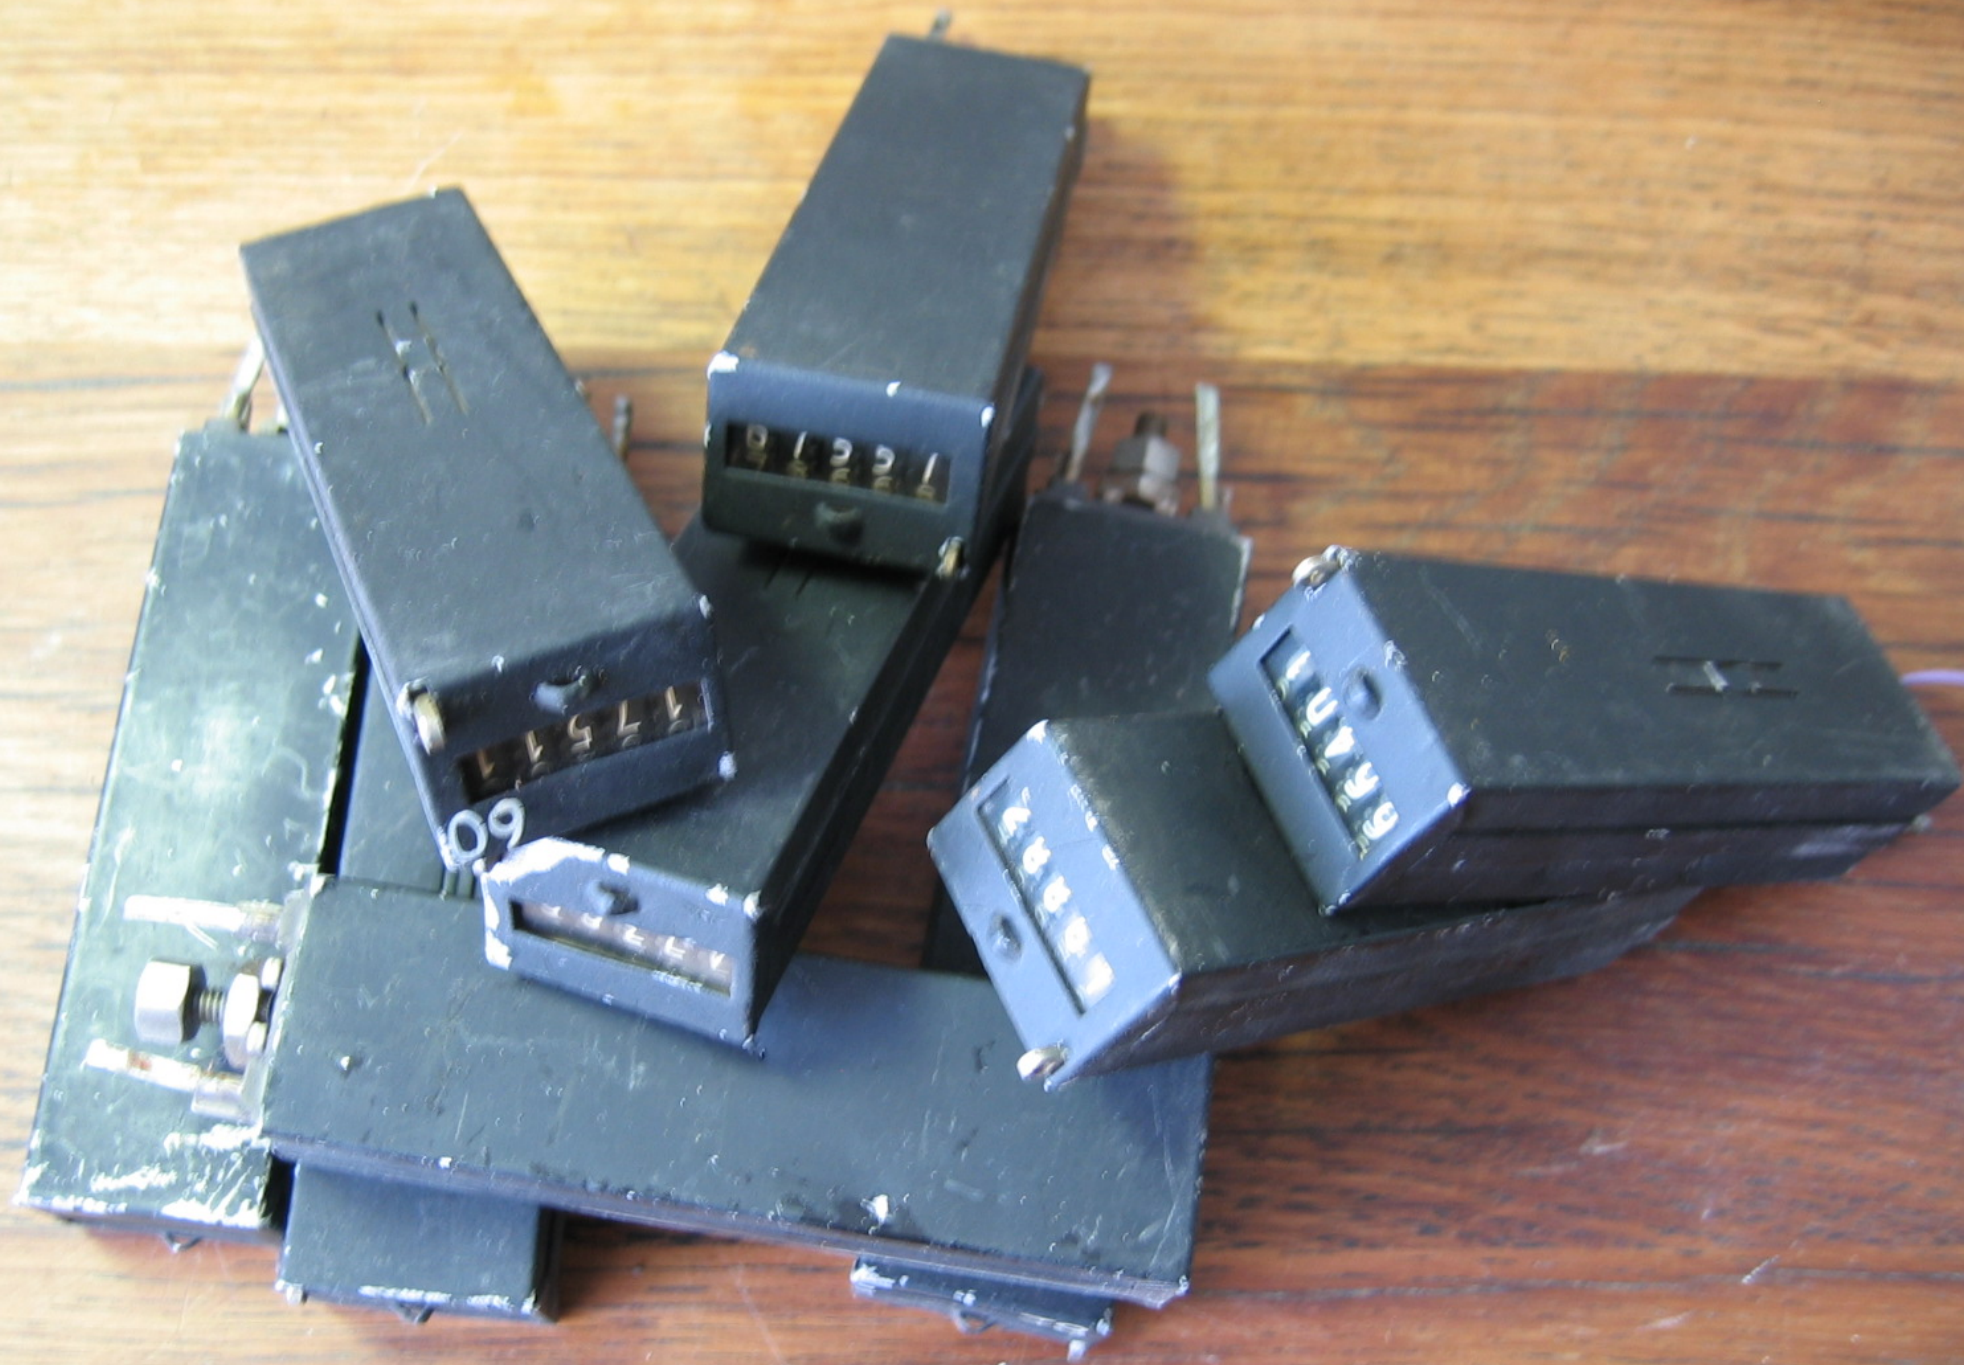




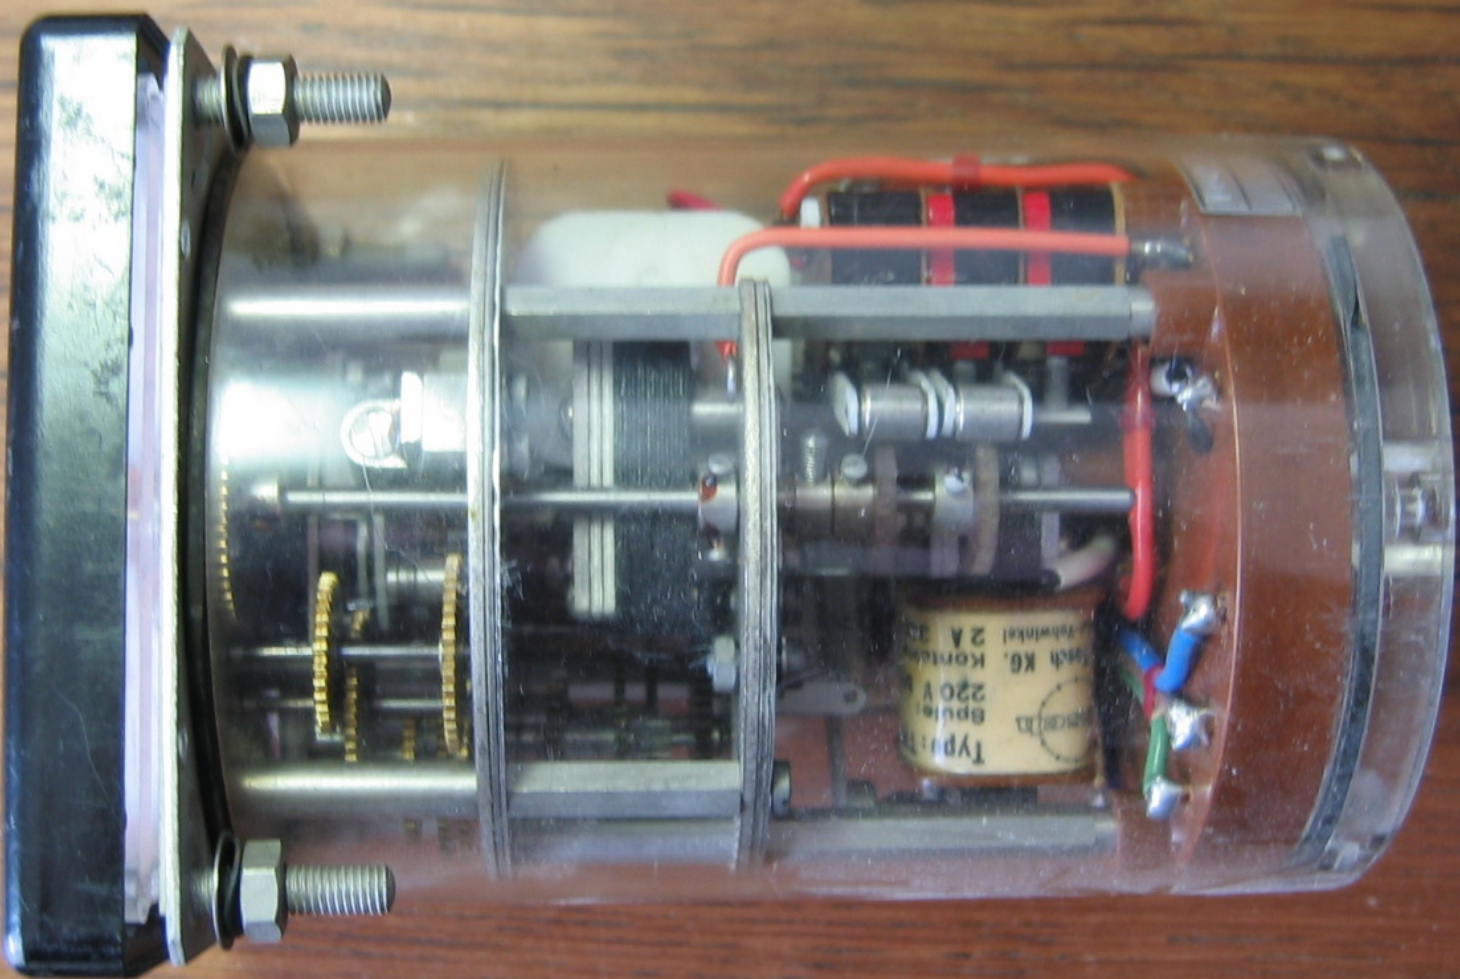










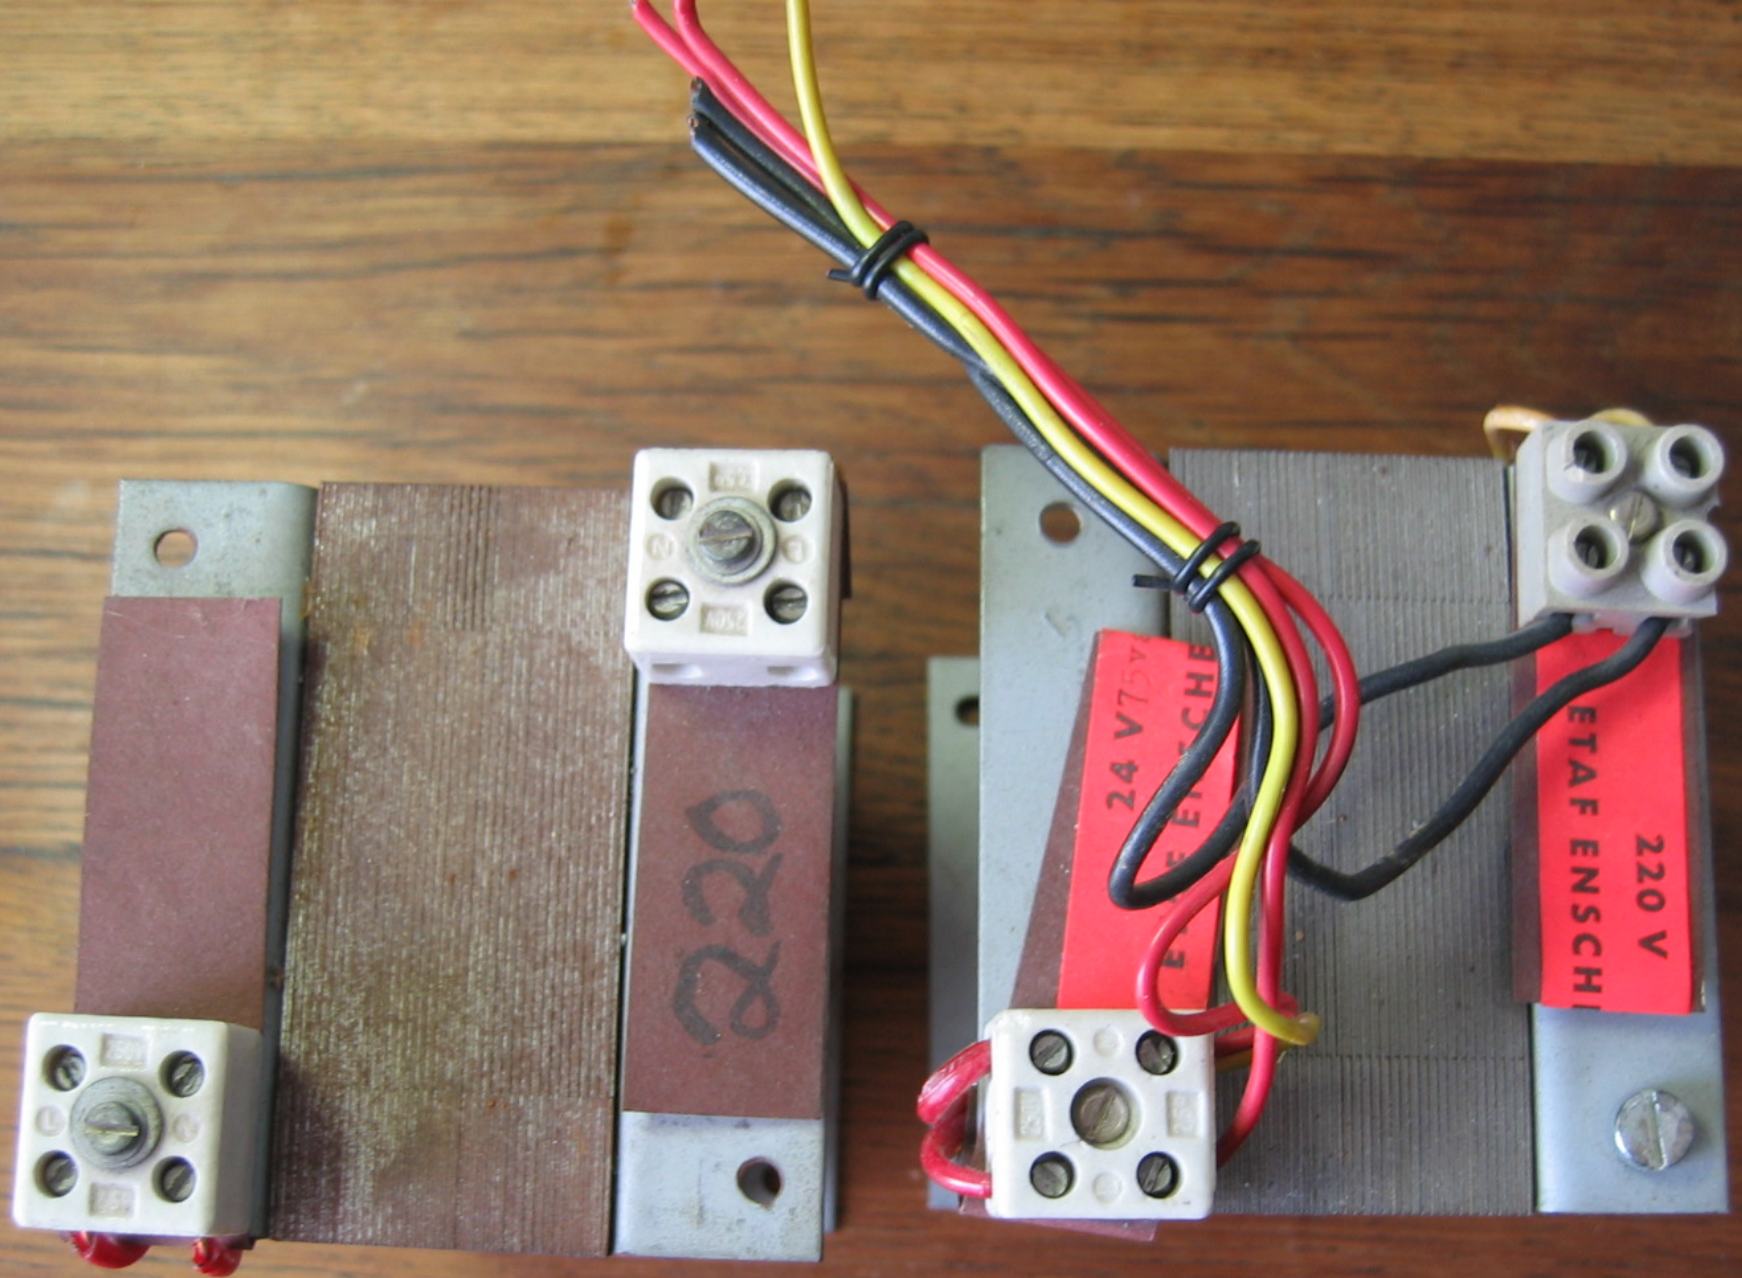

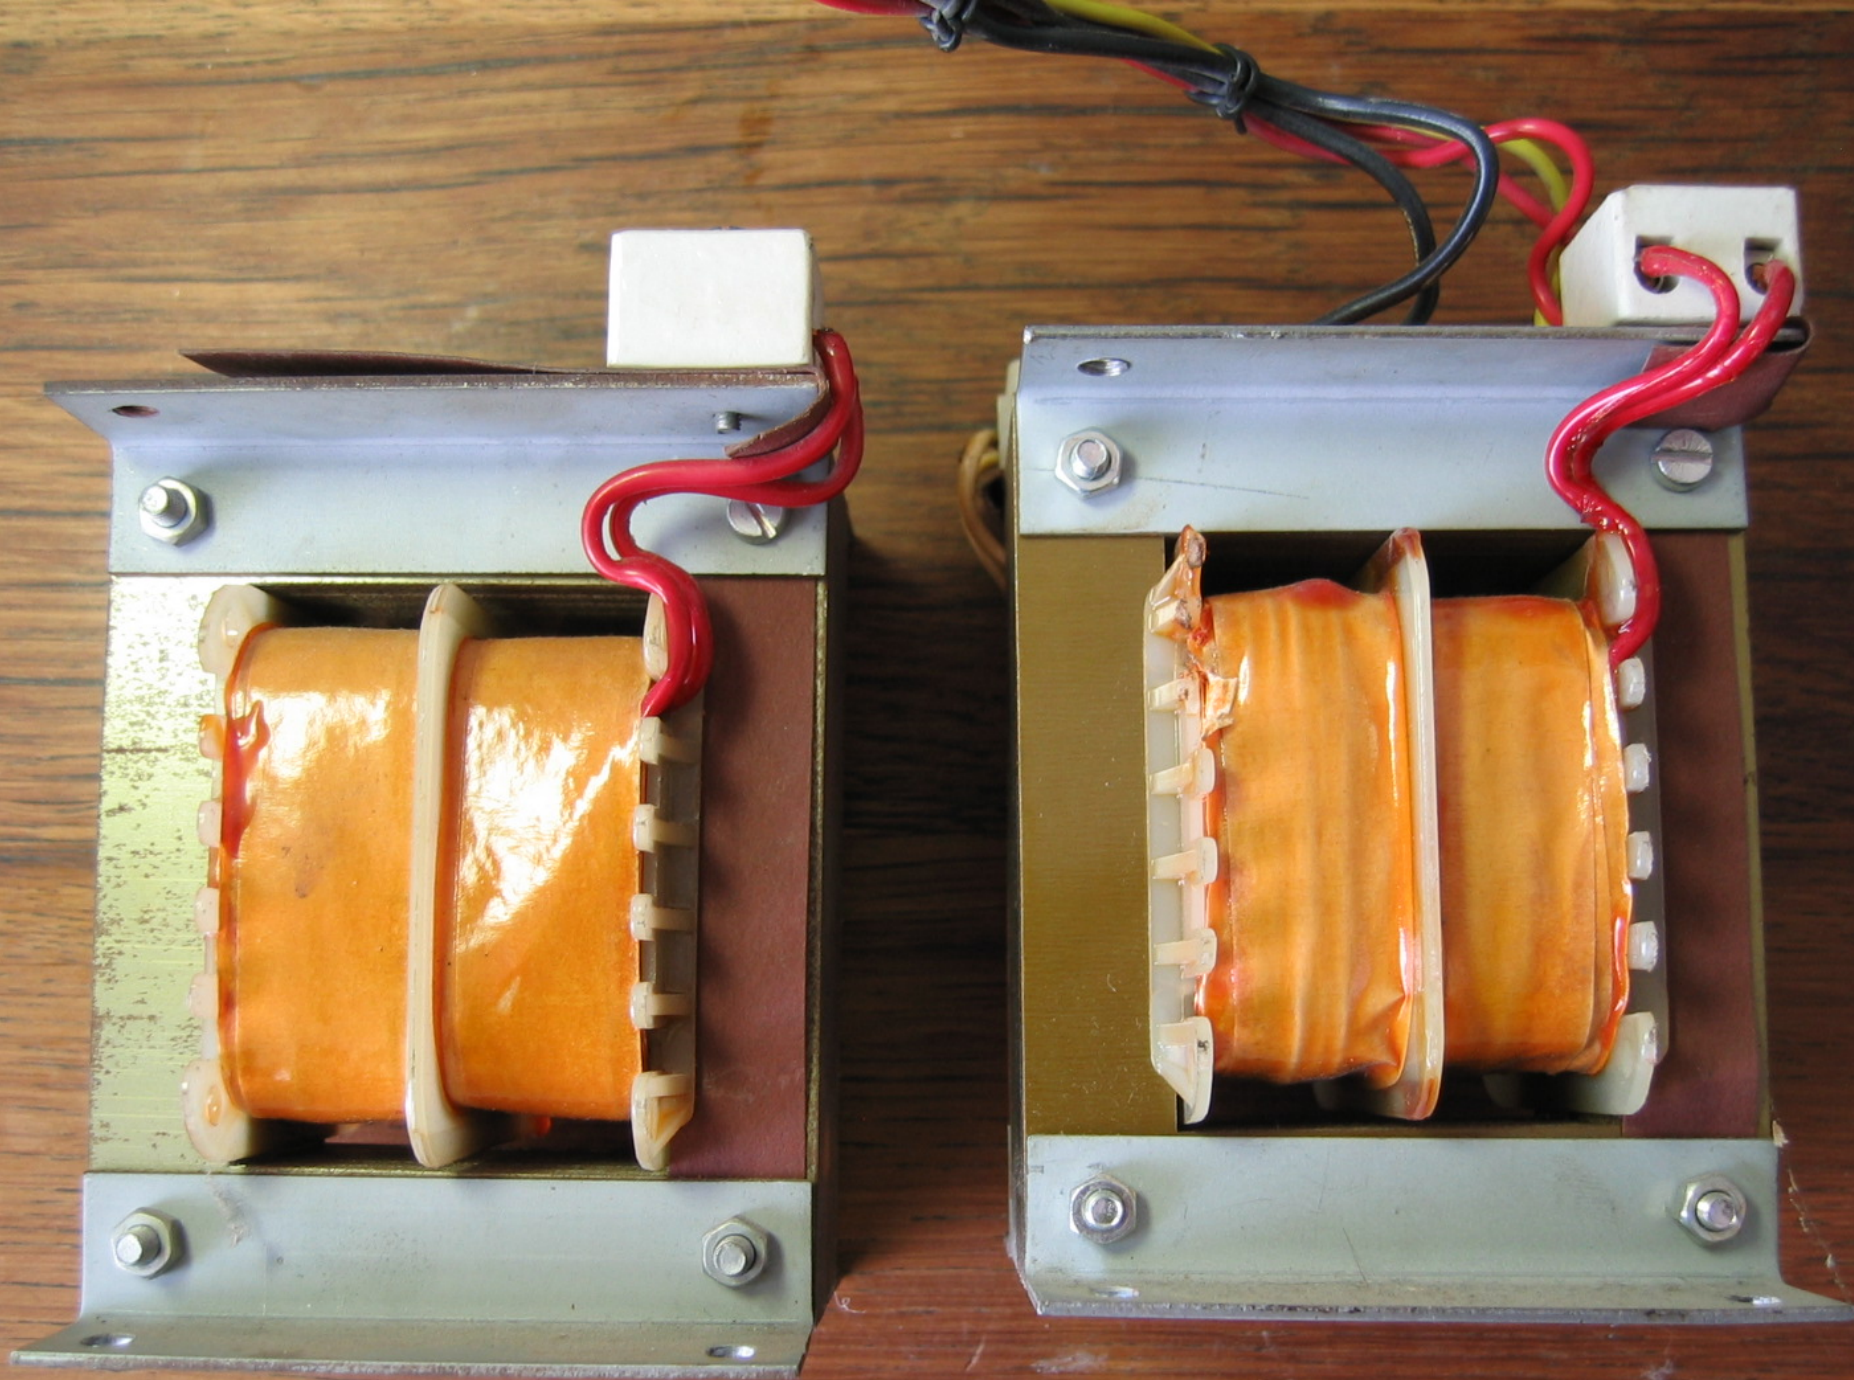

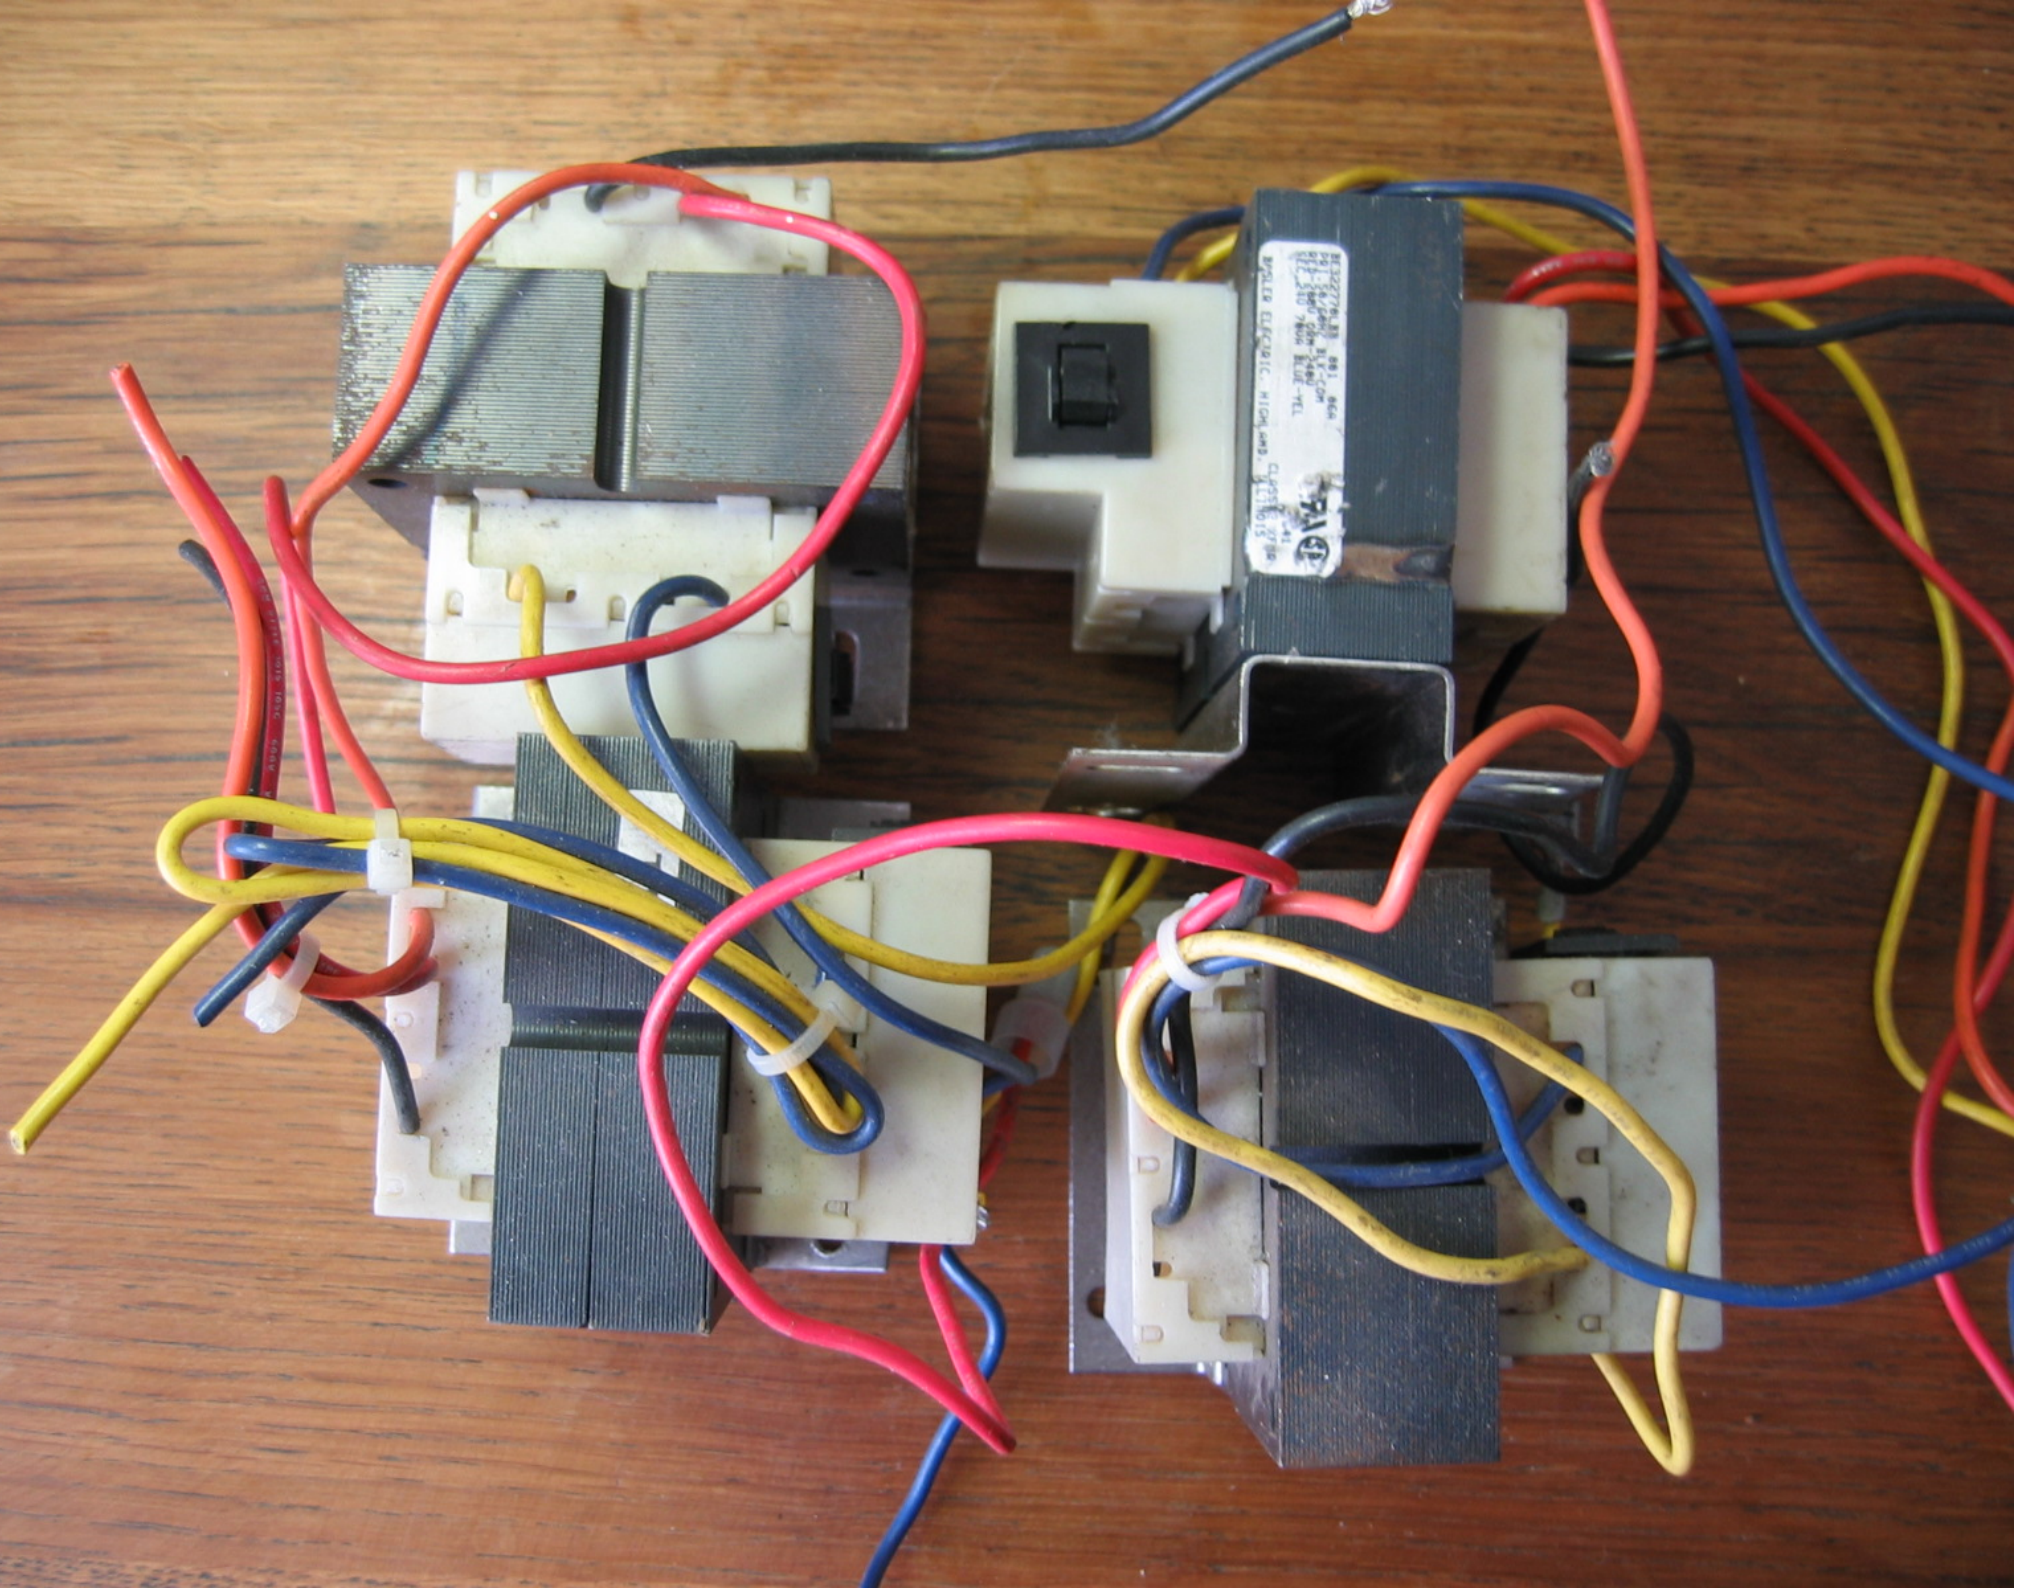


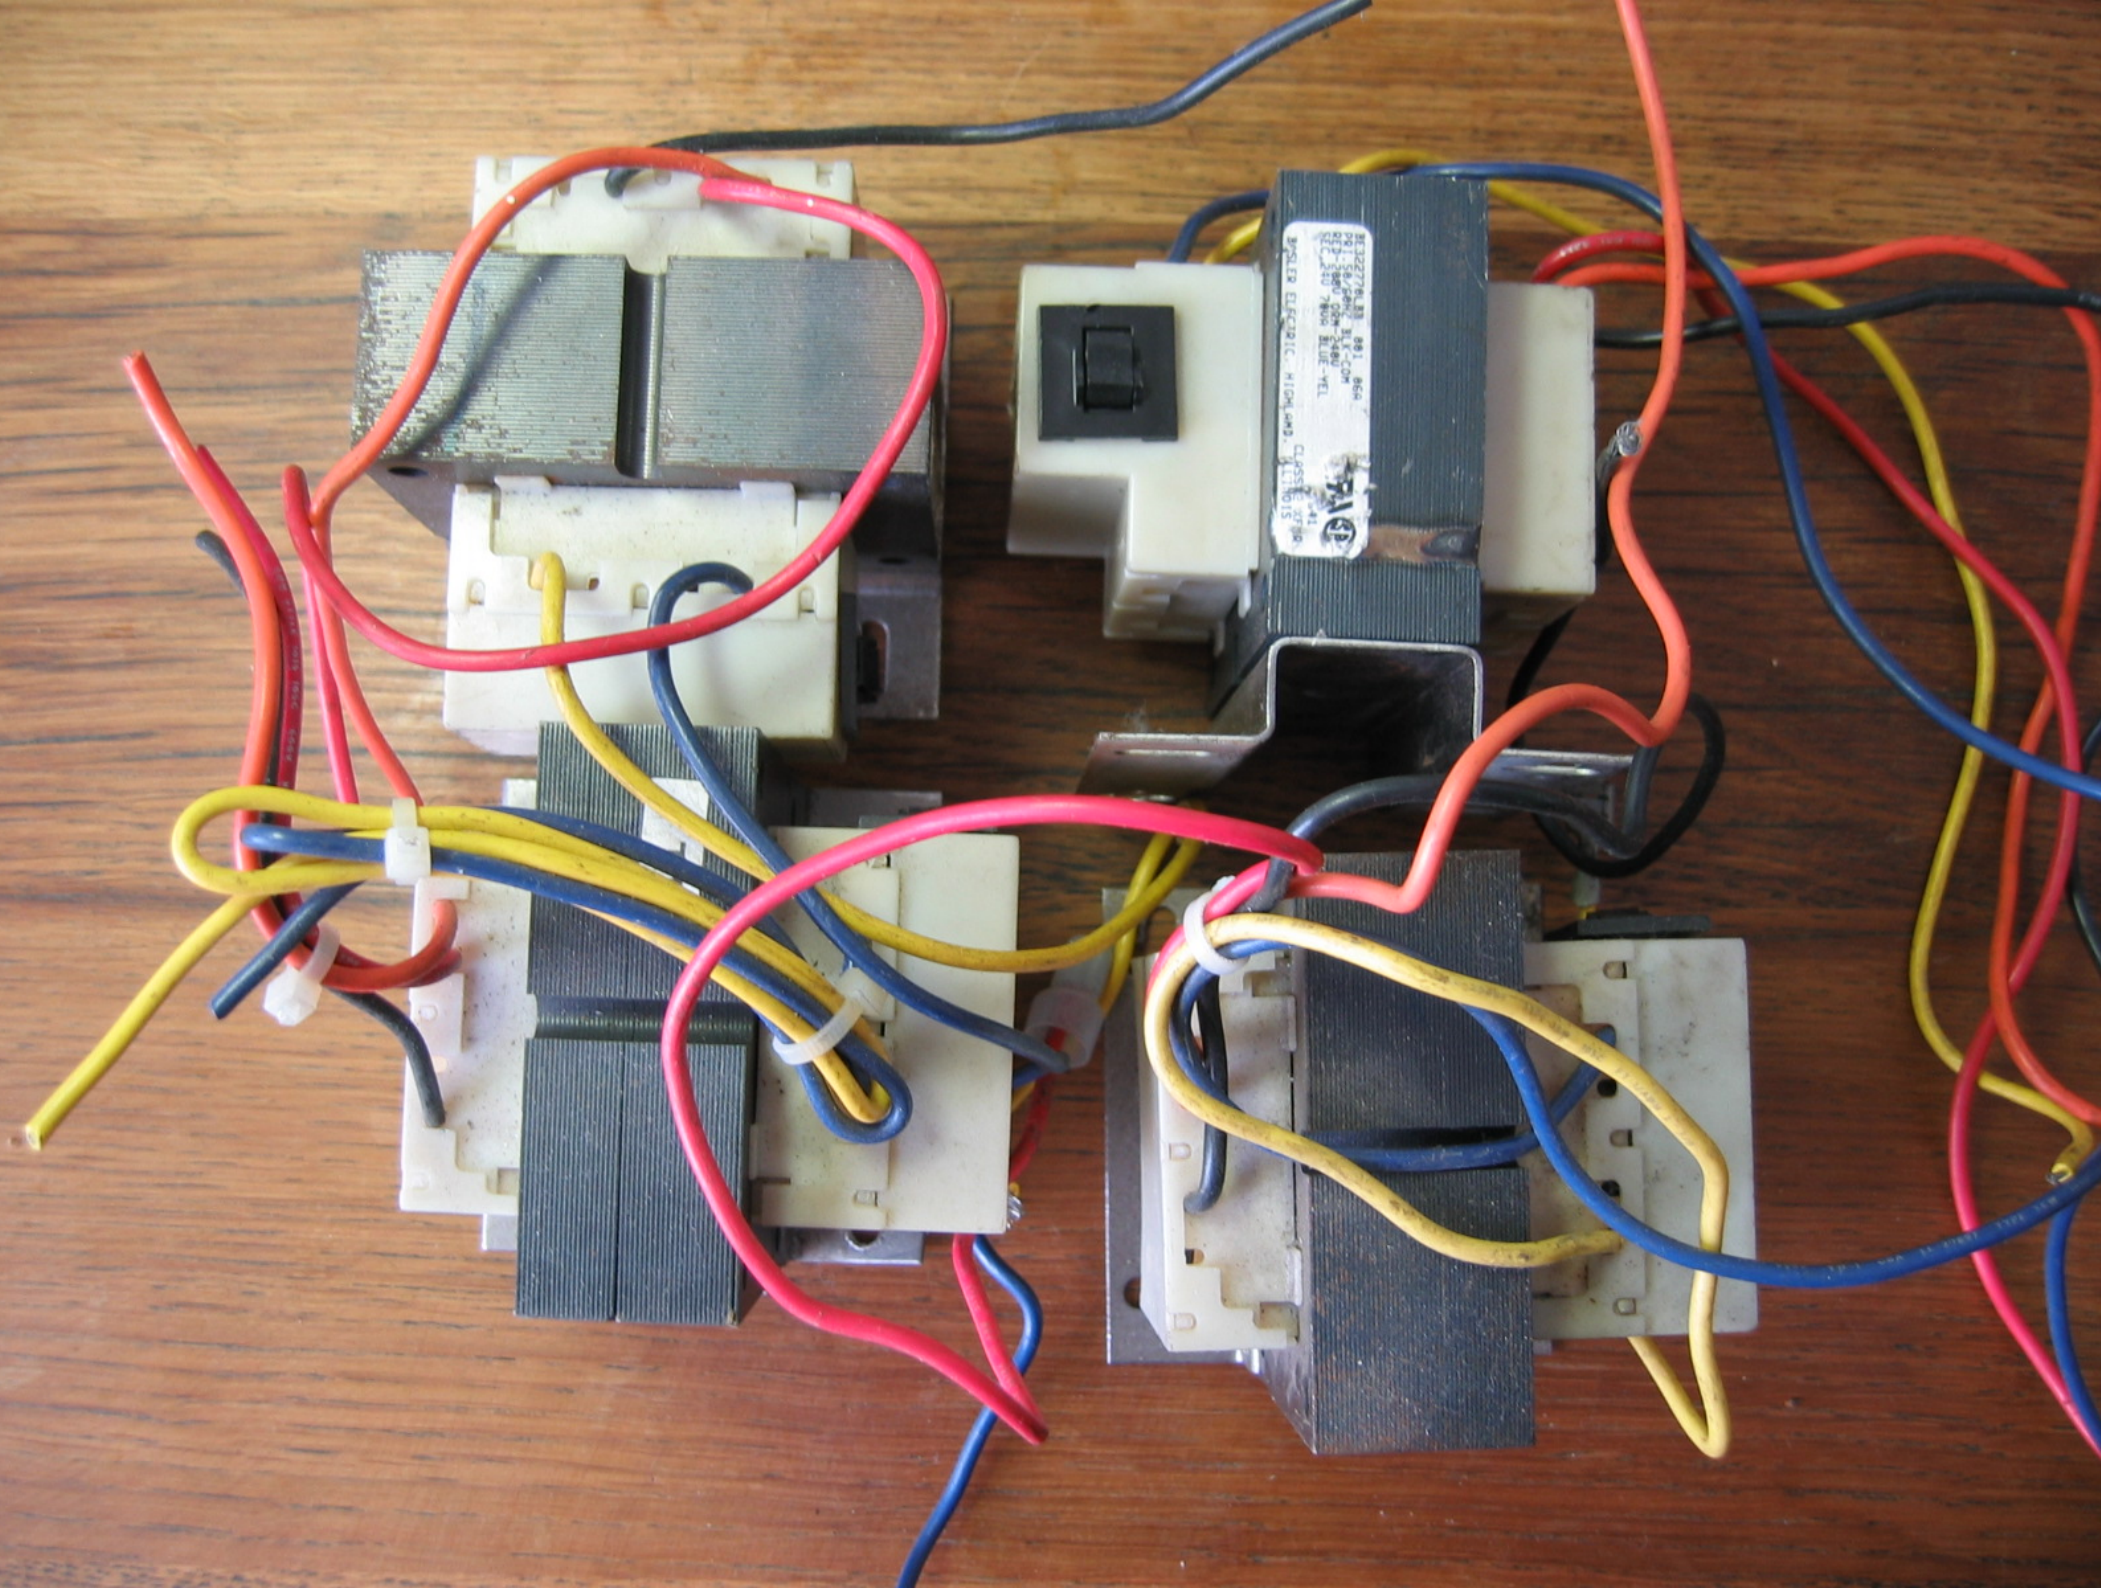





ET2

TYP: CM90-PS-230AC/24DC/2
IN : 230VAC 50/60Hz
OUT: 24VDC/2A Best.NR:2943709


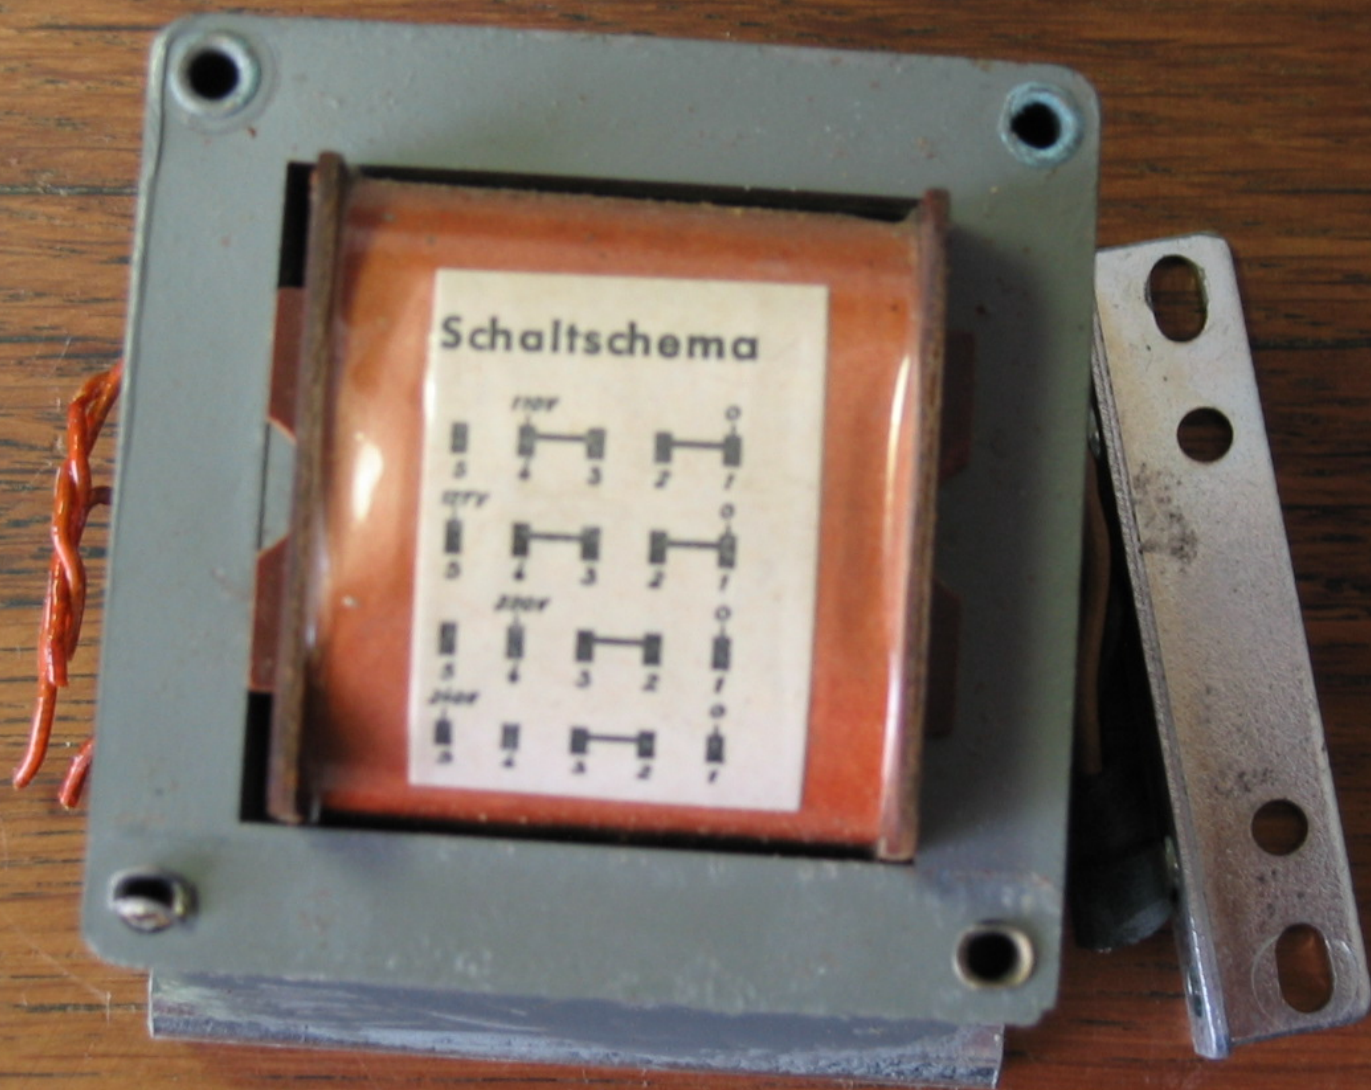


Schaltschema

110V



220V












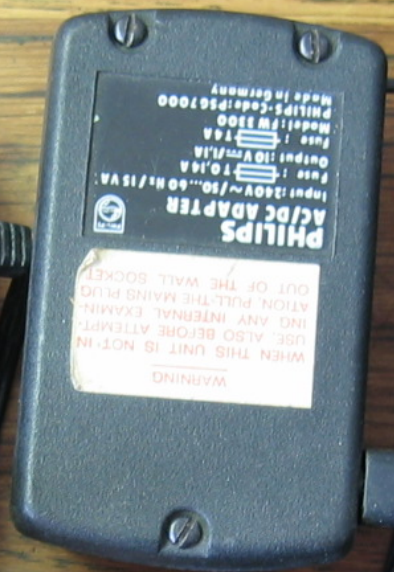













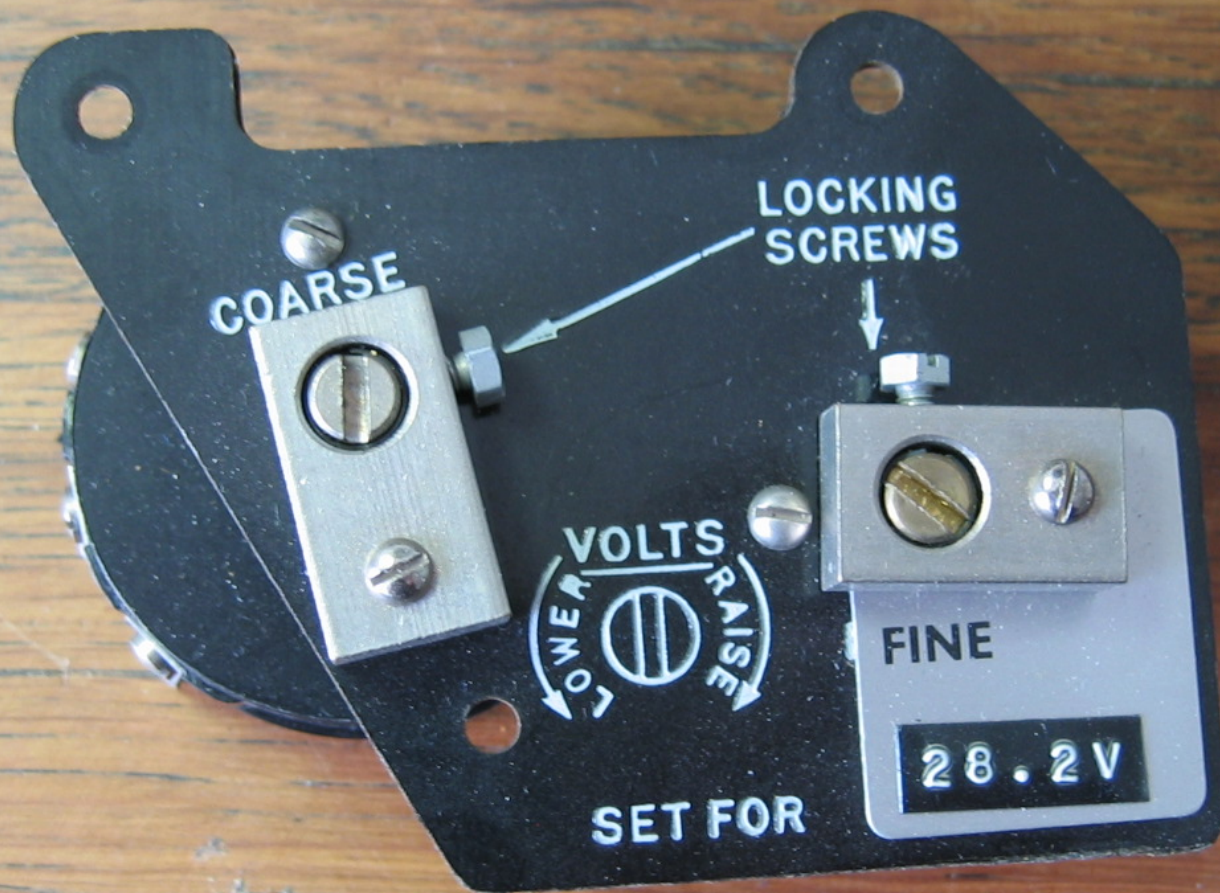




LIN
WELWYN WG
65P22D/625Ω

CONERN LTD
ROMFORD
Wire Wound
CLR.5004/1652
2.500 Ω ±5%
WK

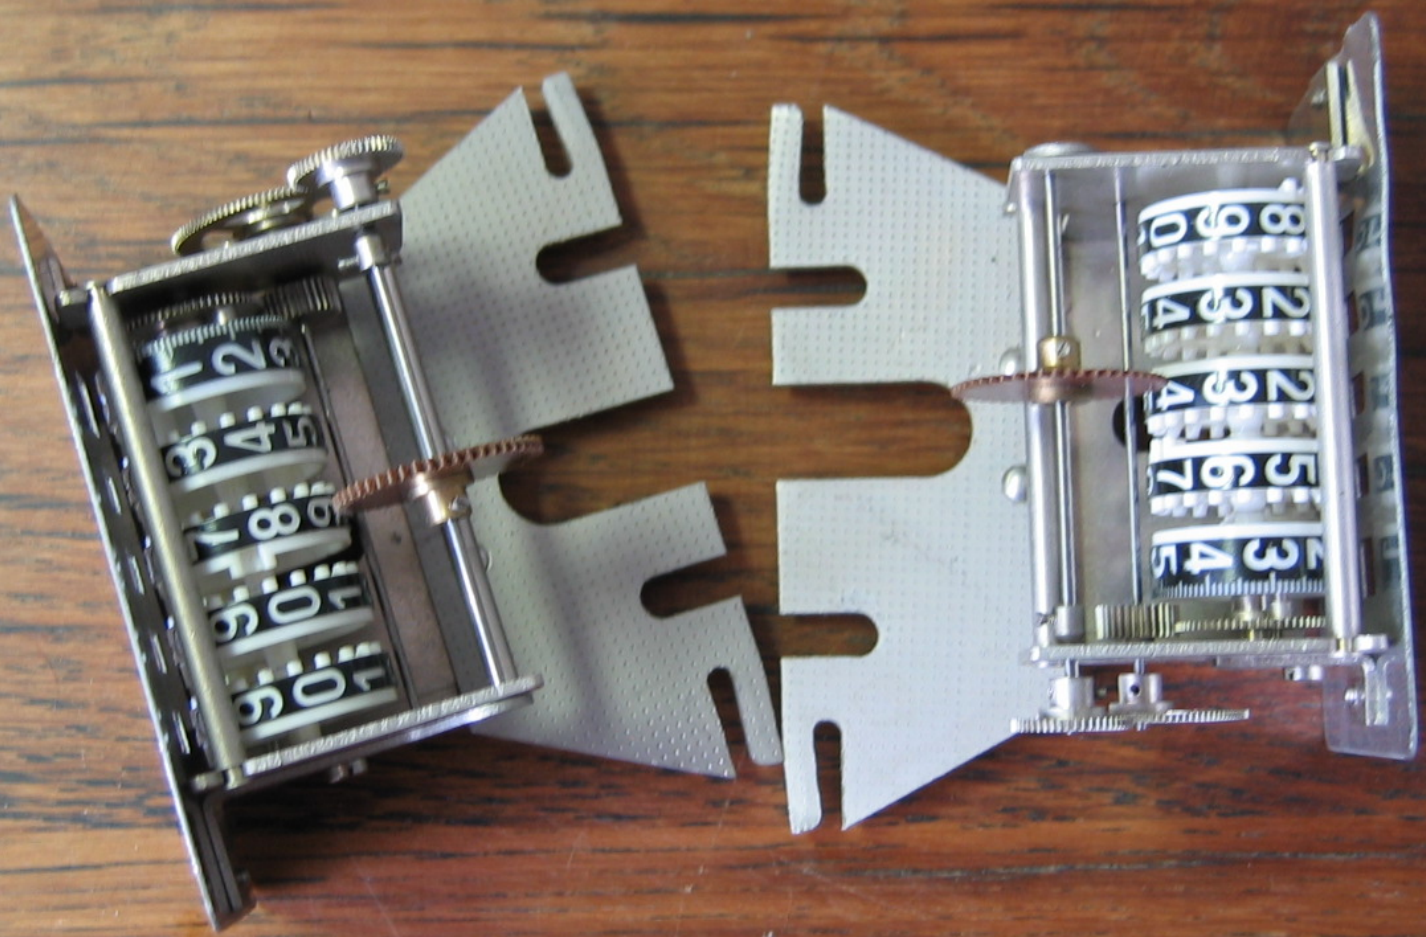

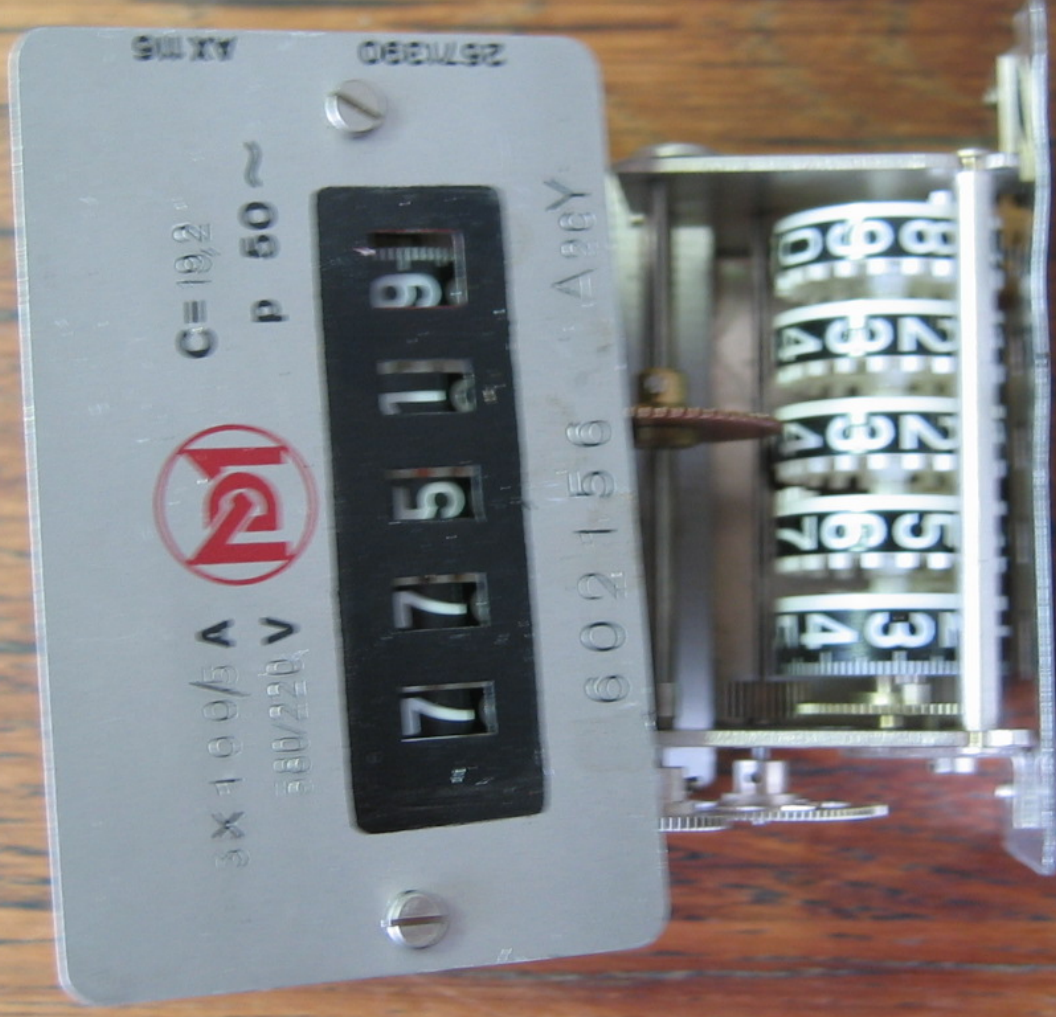

AX 106

2571390



3X 100/5 A
50/220 V

C=102

P 50 ~


7 7 5 1 9


602156 A28Y


1 2 3 4 5 6 7 8 9






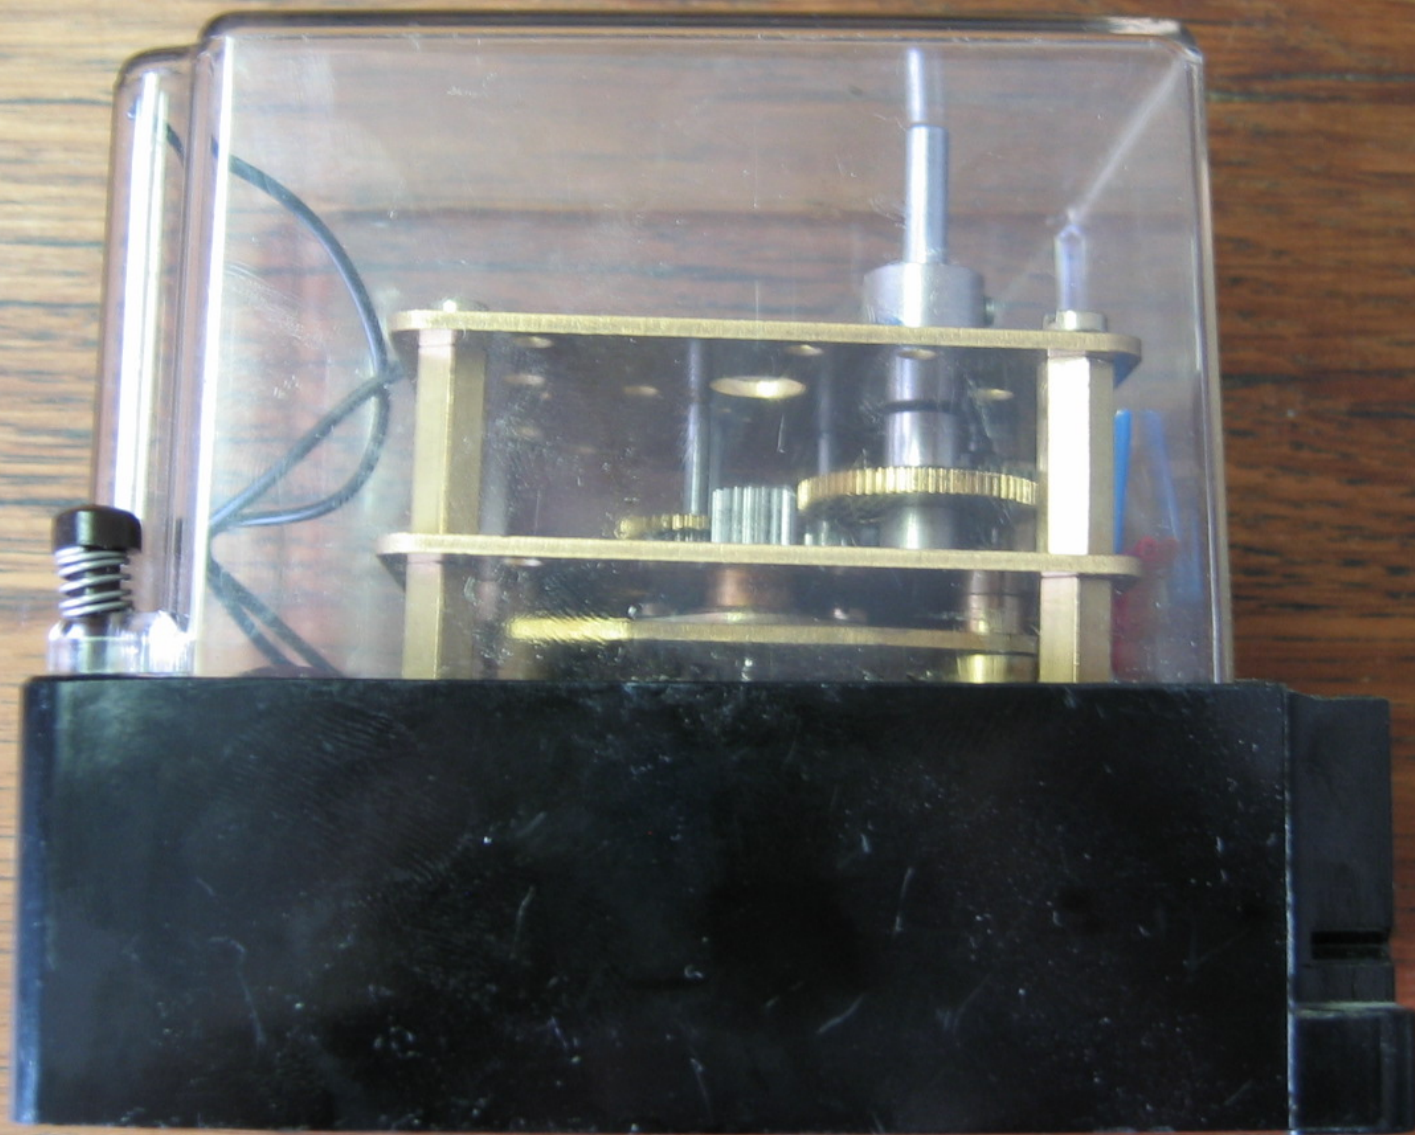

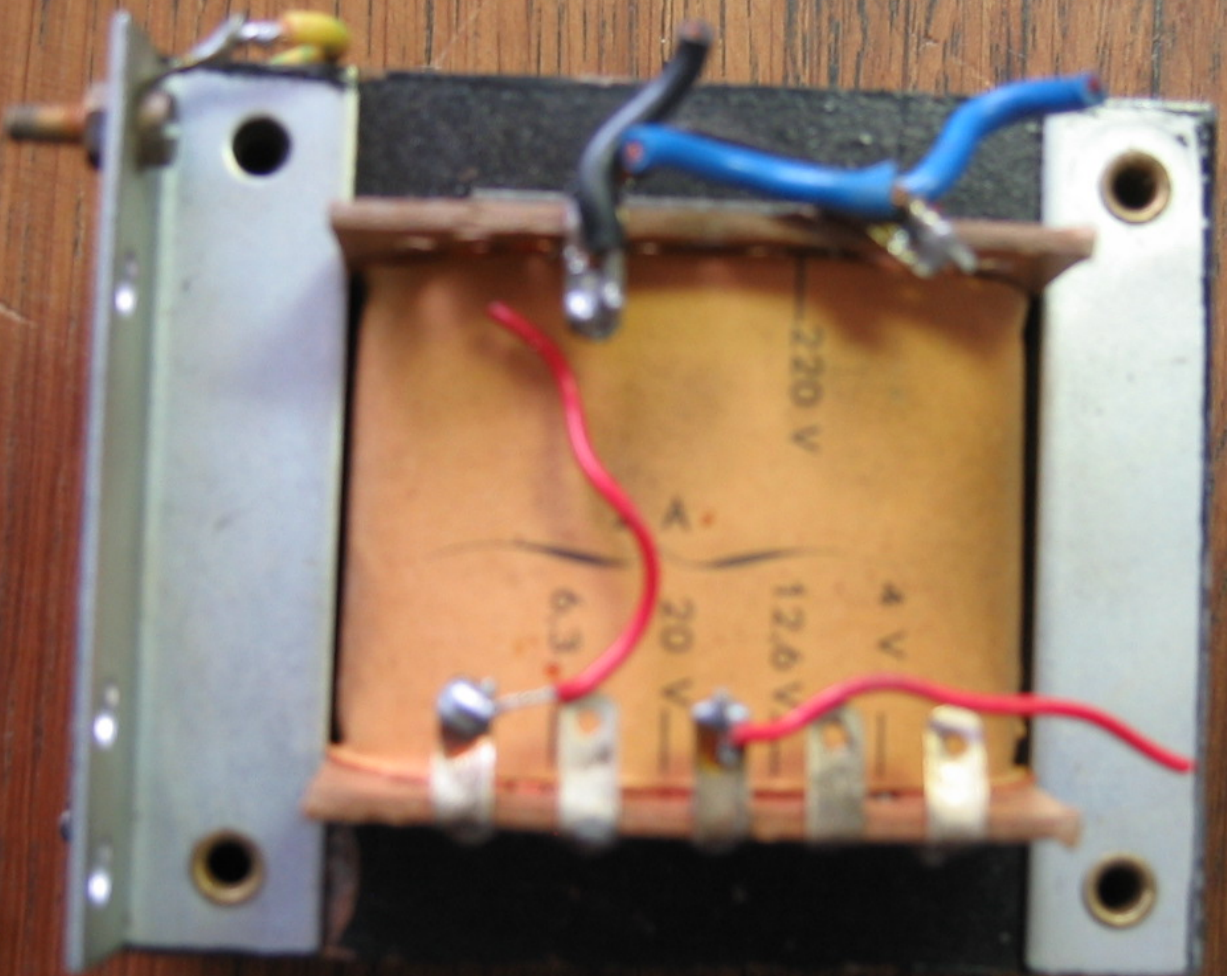


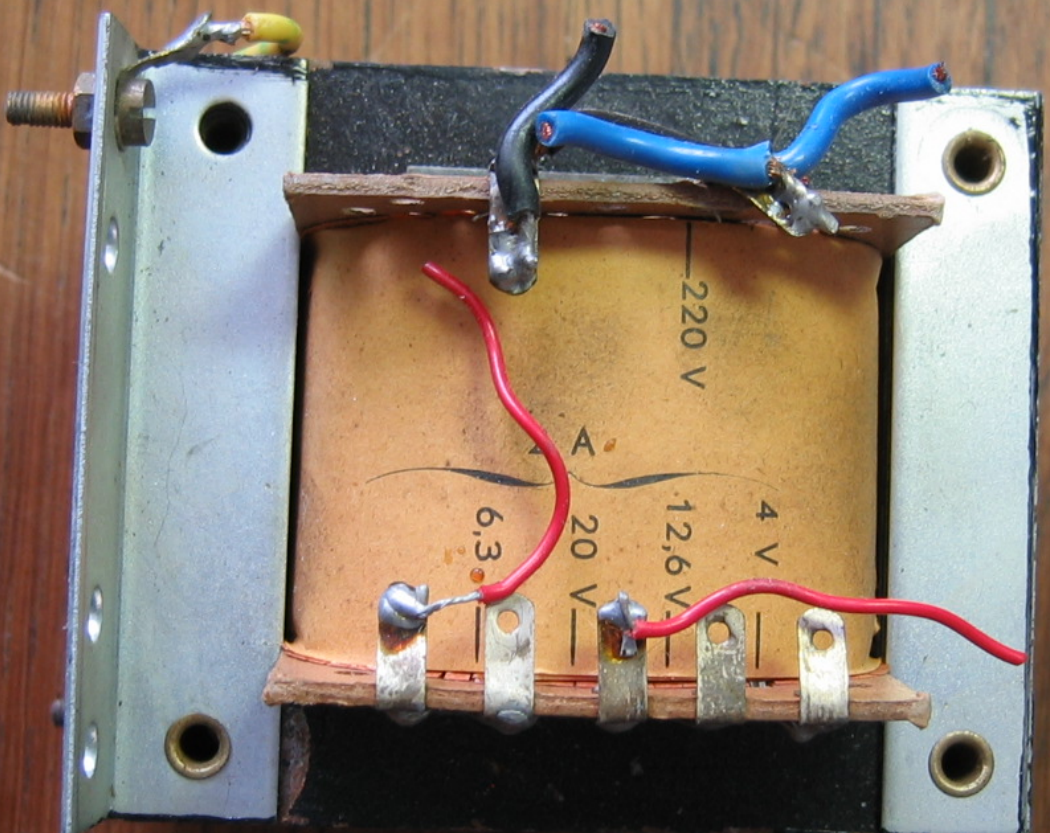

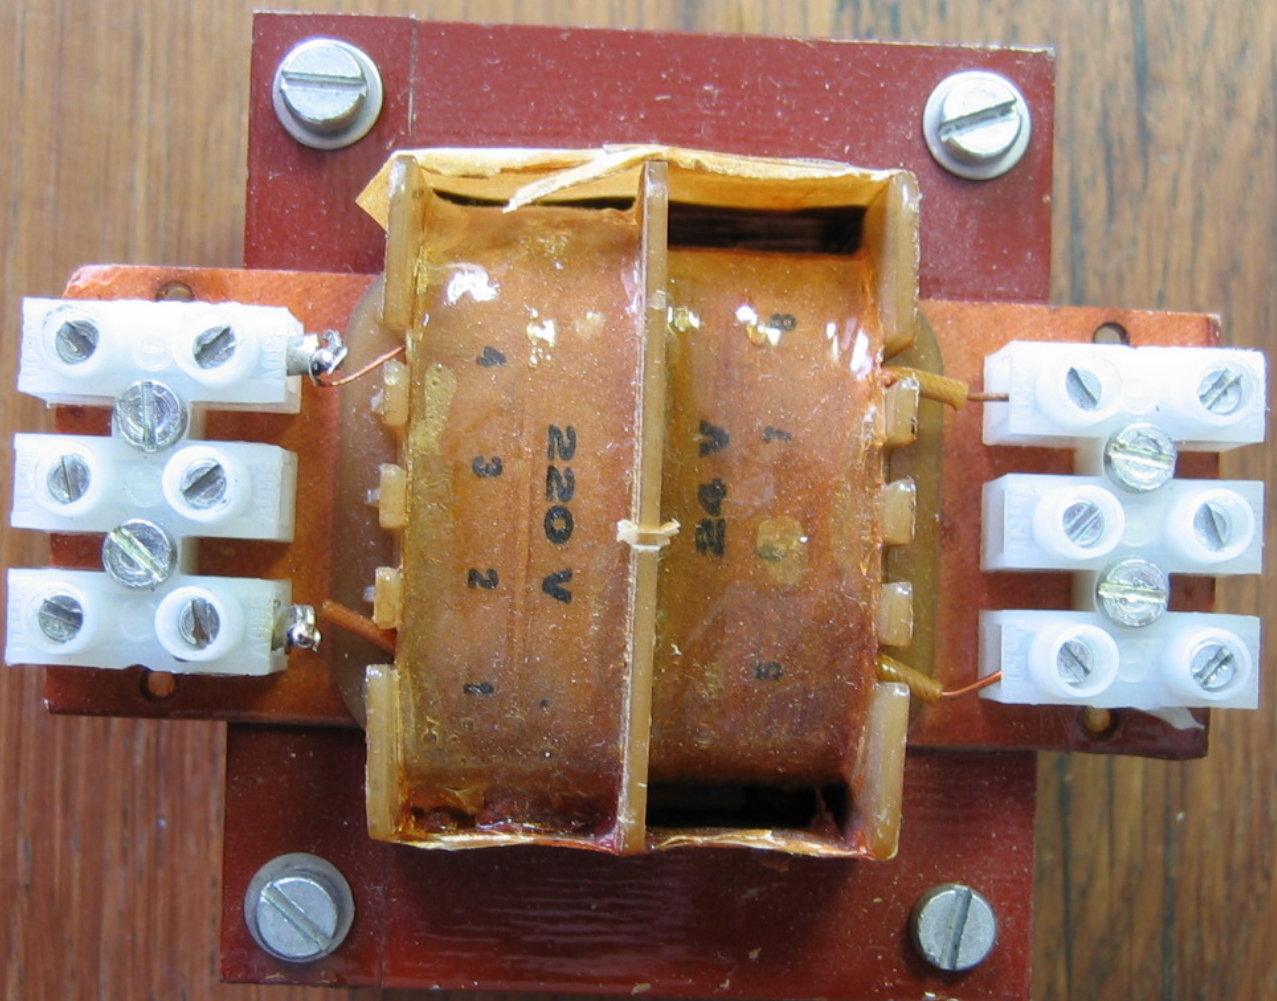







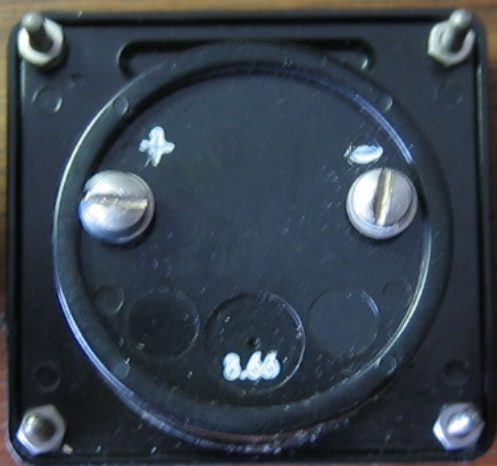




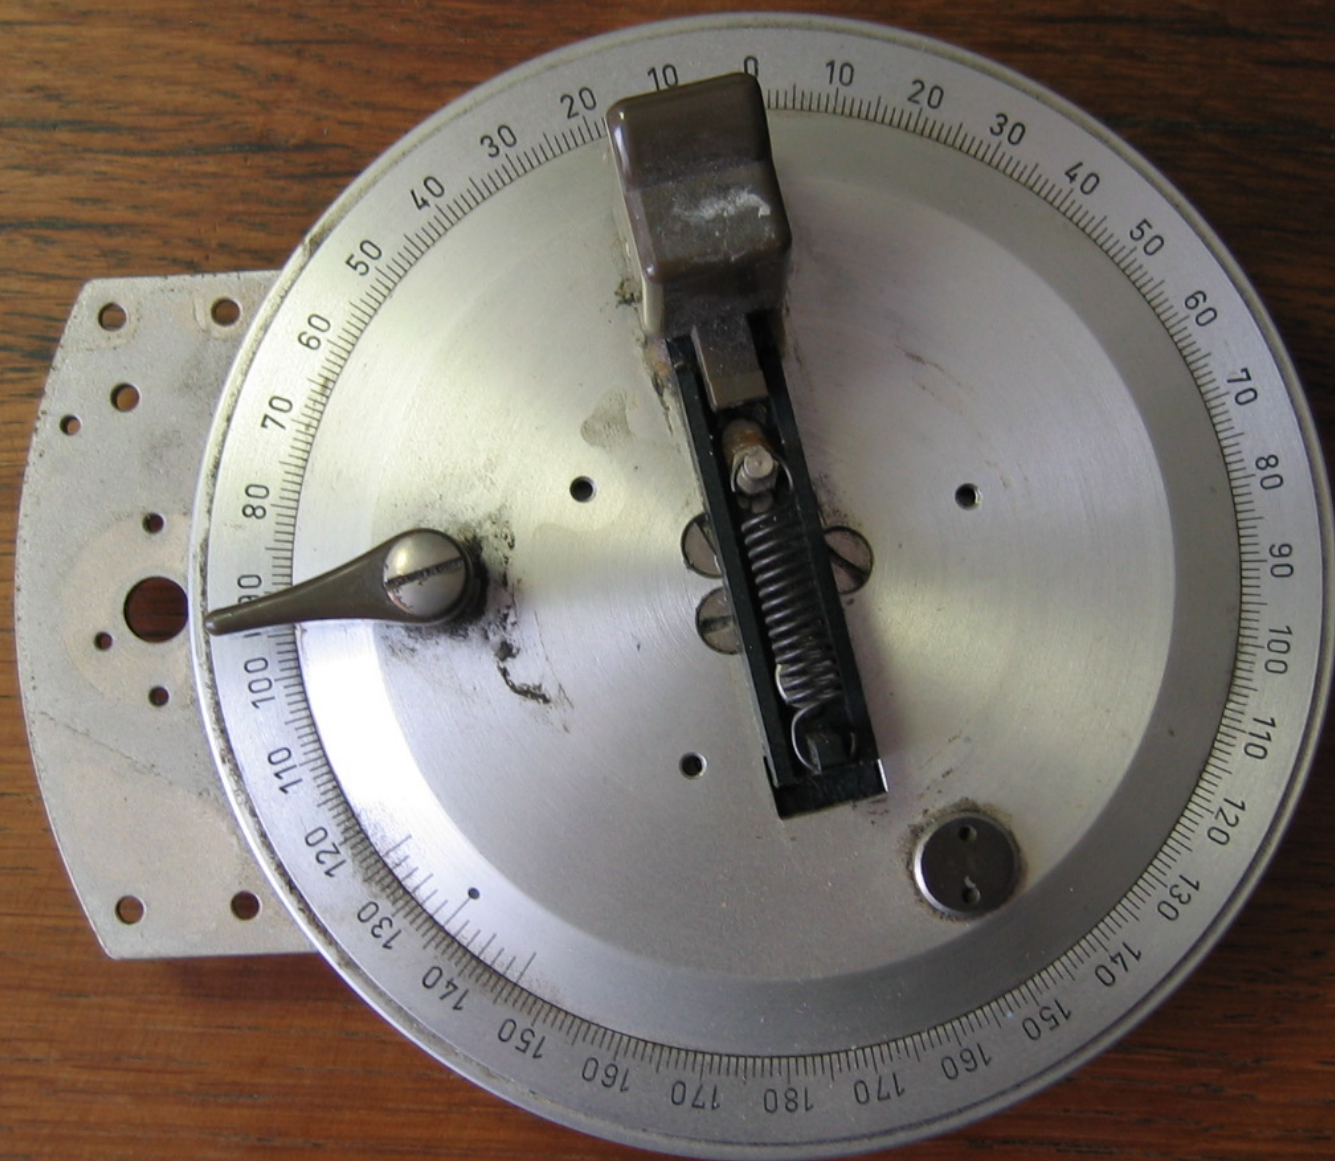

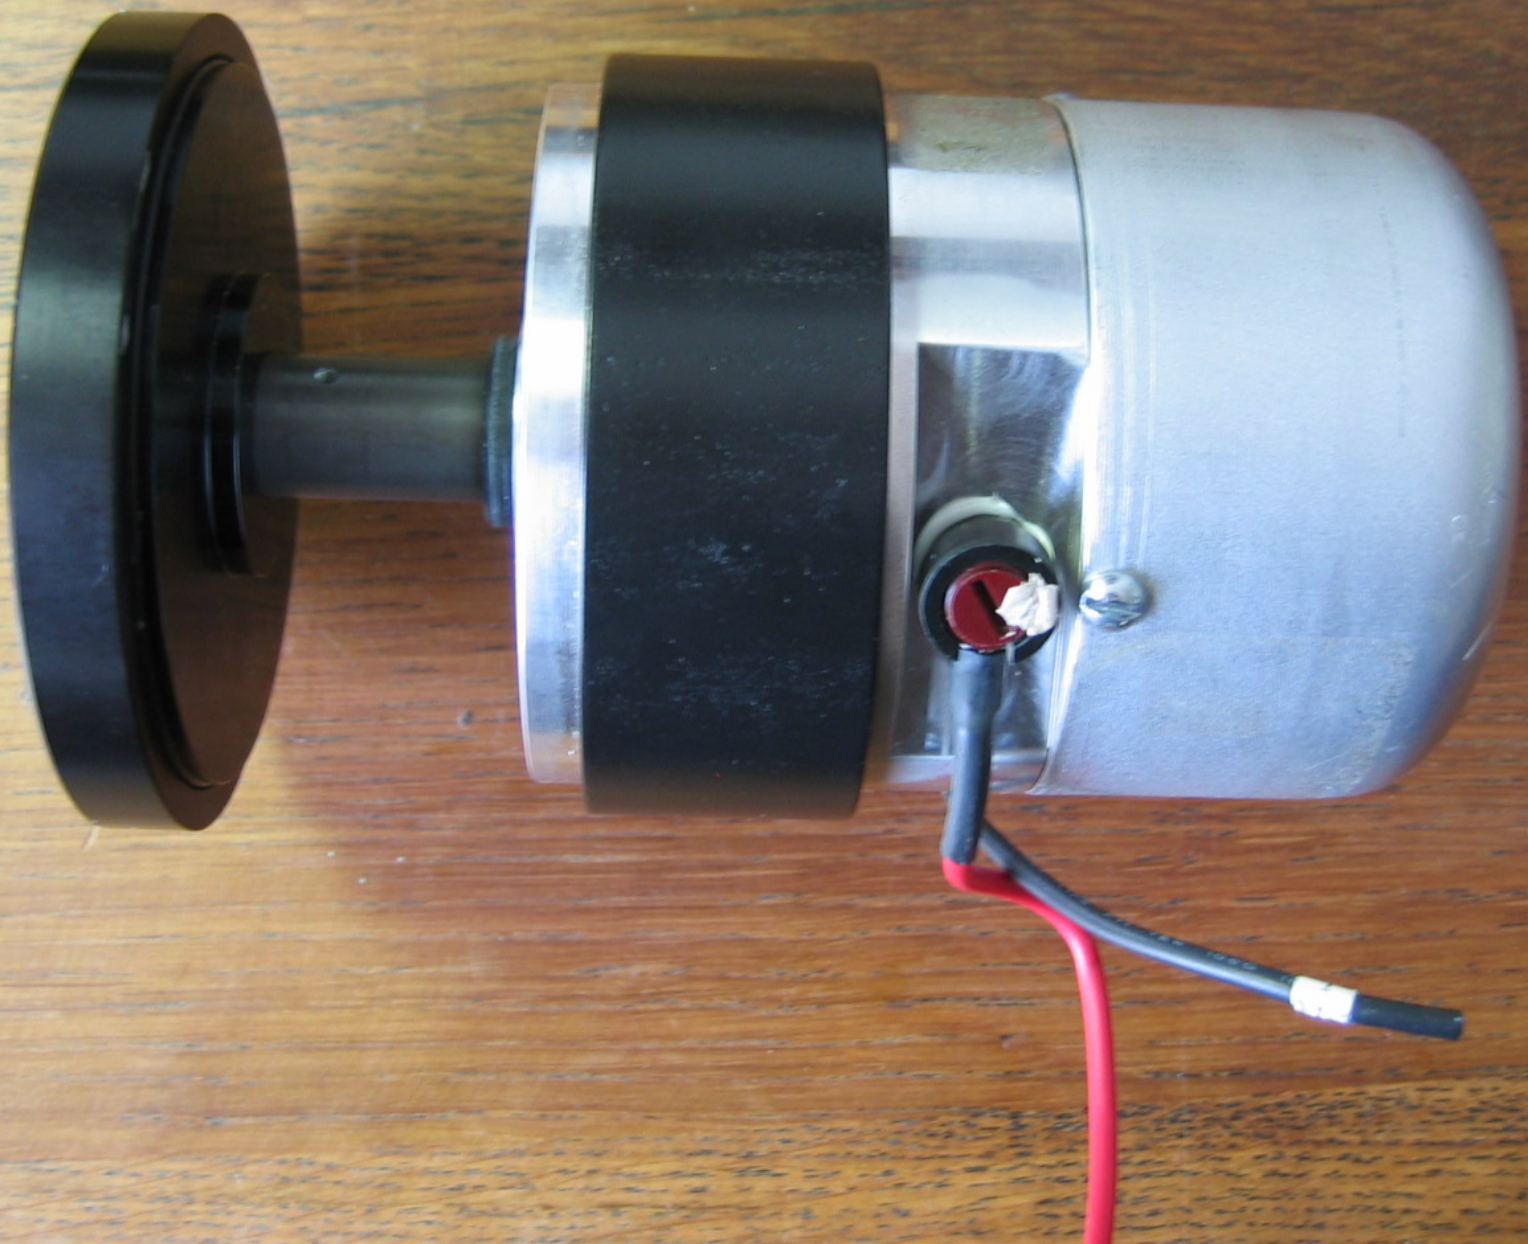





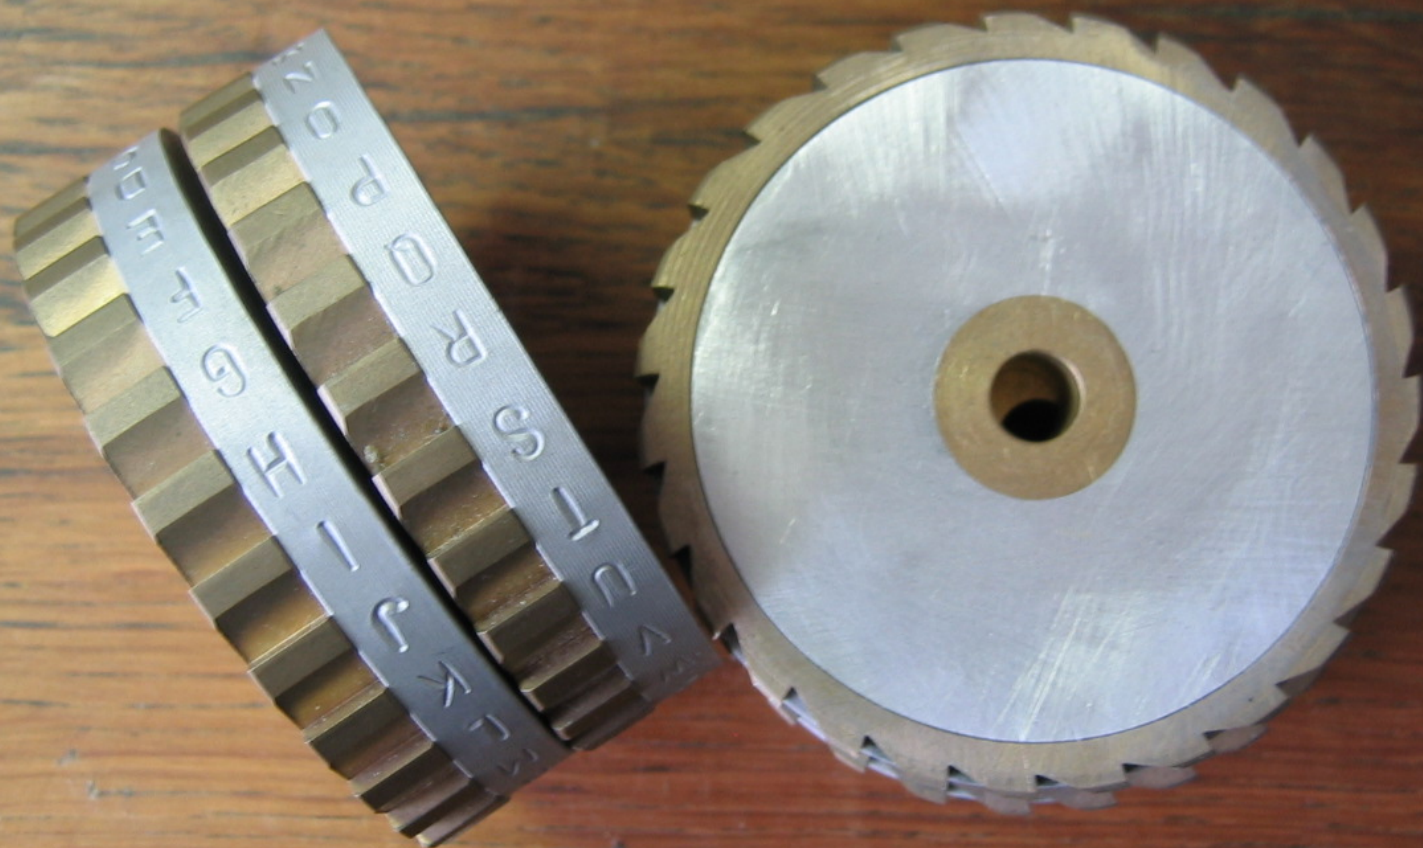

TRIX EXPRESS

TYPE 579

Prim. 220V 50/60Hz~

Sec. 4-6,5-8-11,5V 0,5A-



E 75 g

Nur für trockene Räume

SIEMENS-SCHUCKERT

Made in Germany



TRIX EXPRESS

TYPE 579

Prim. 220 V 50/60 Hz~

Sec. 4-6,5-9-11,5 V 0,5A-




E 75 g





Nur für trockene Räume
SIEMENS-SCHUCKERT


Made in Germany



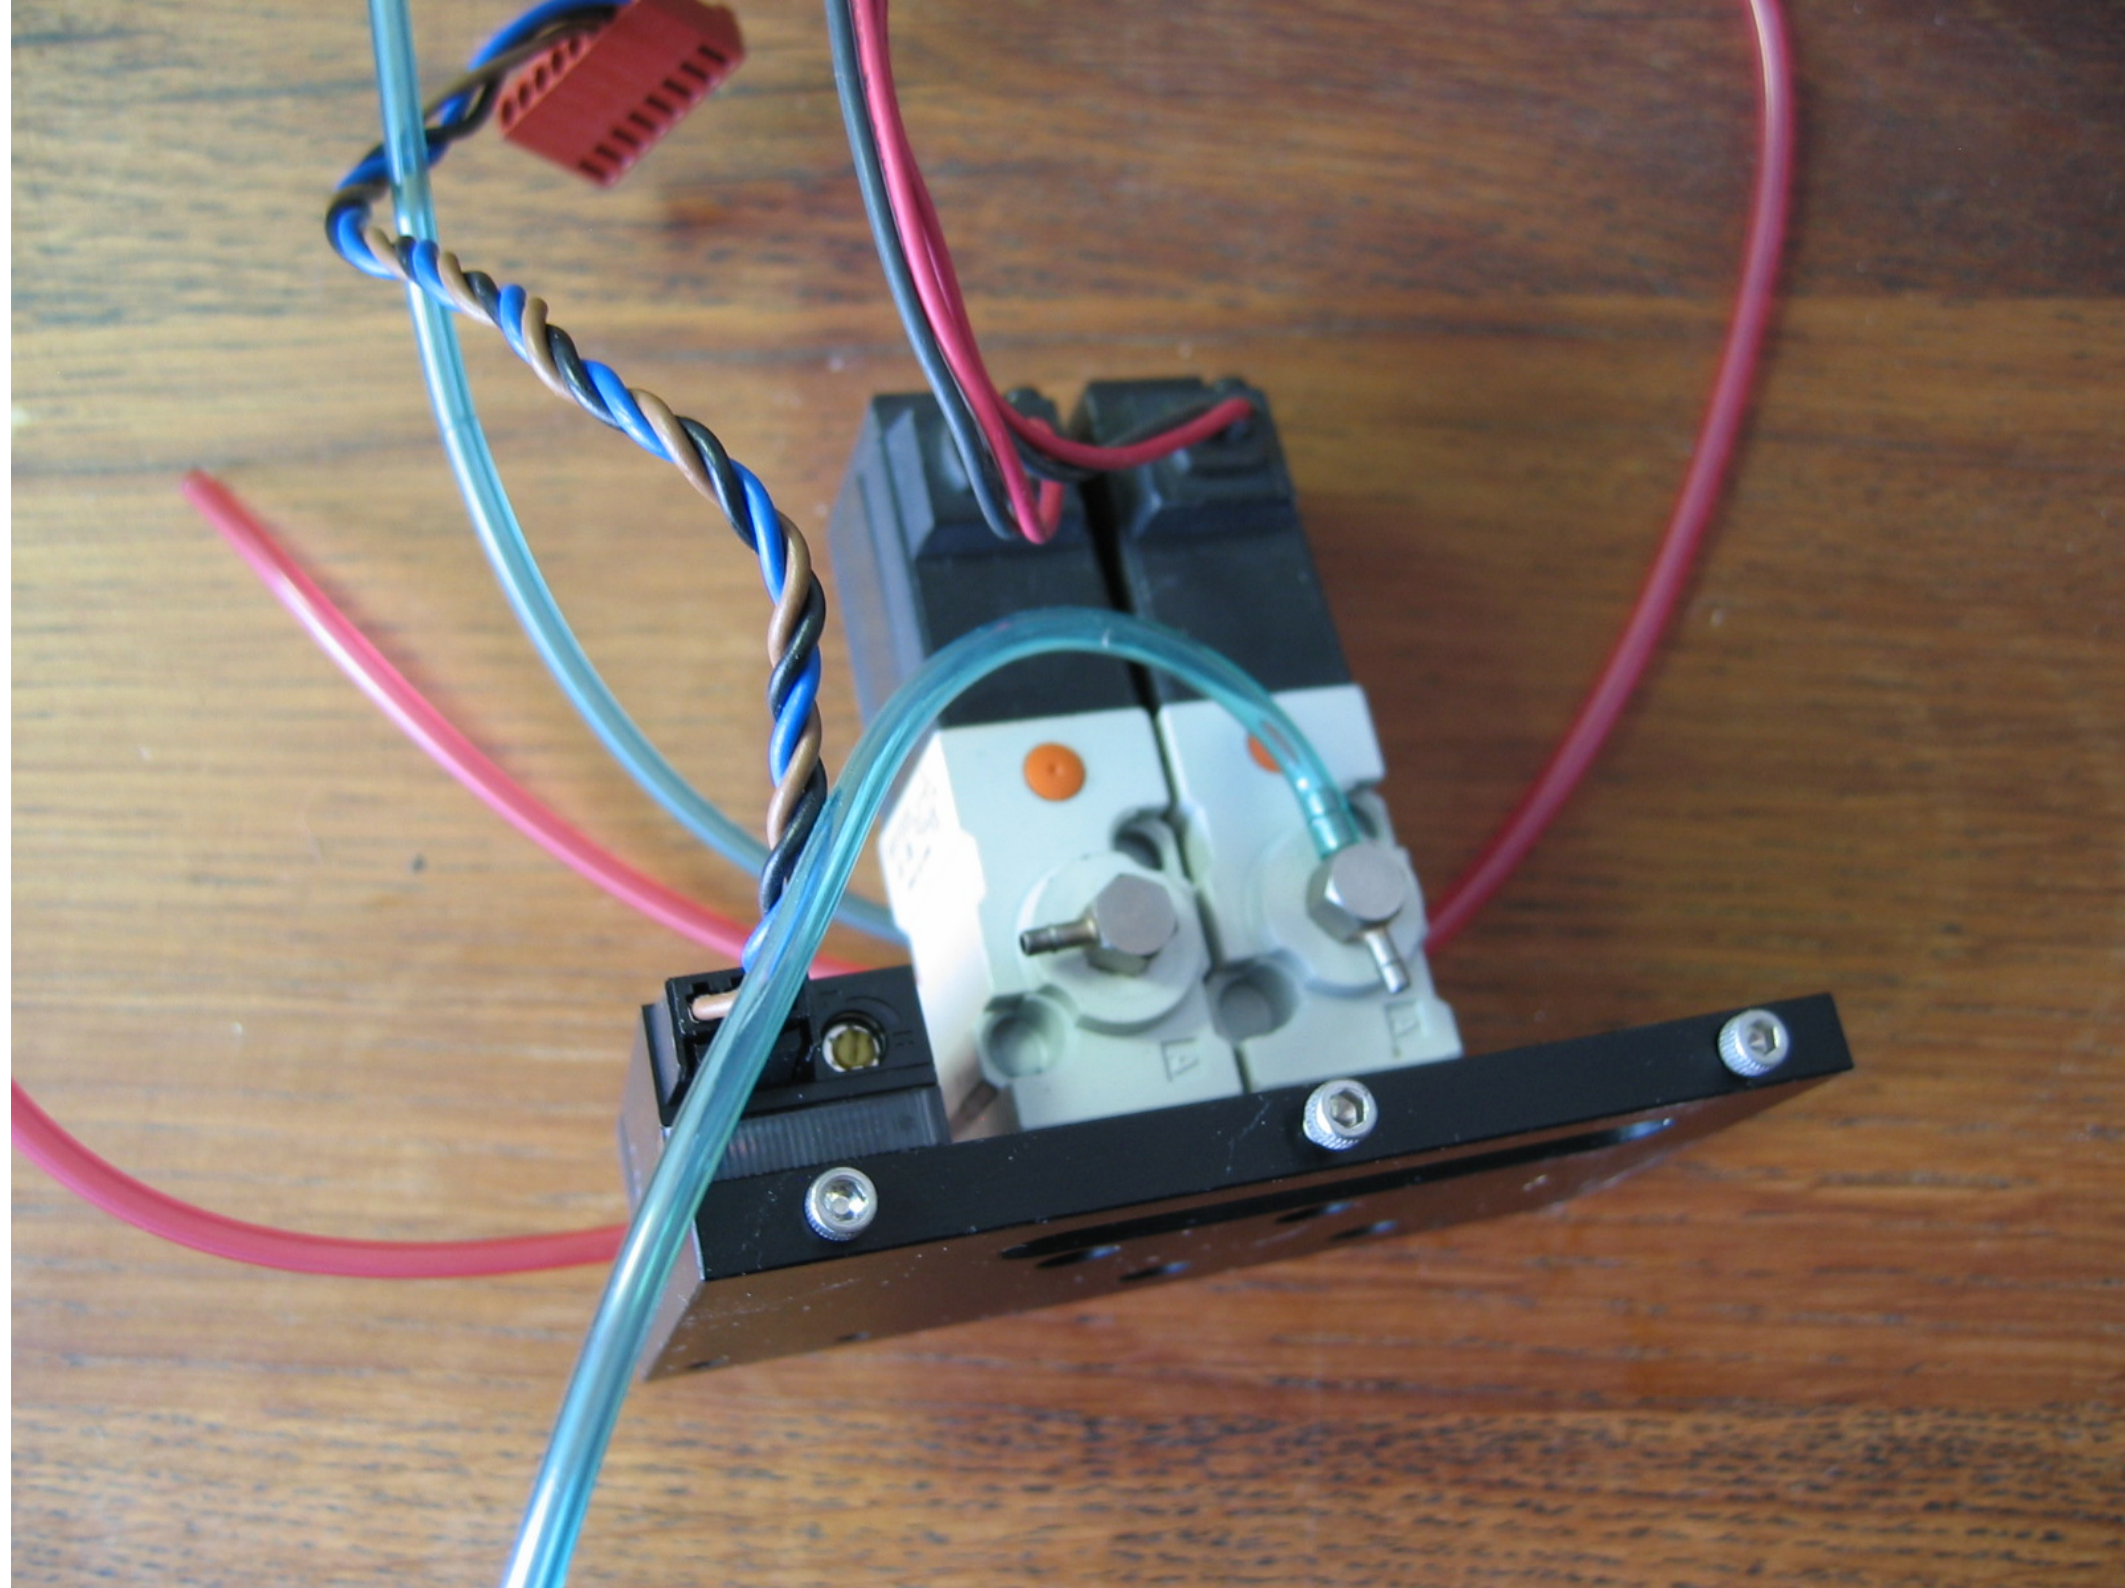

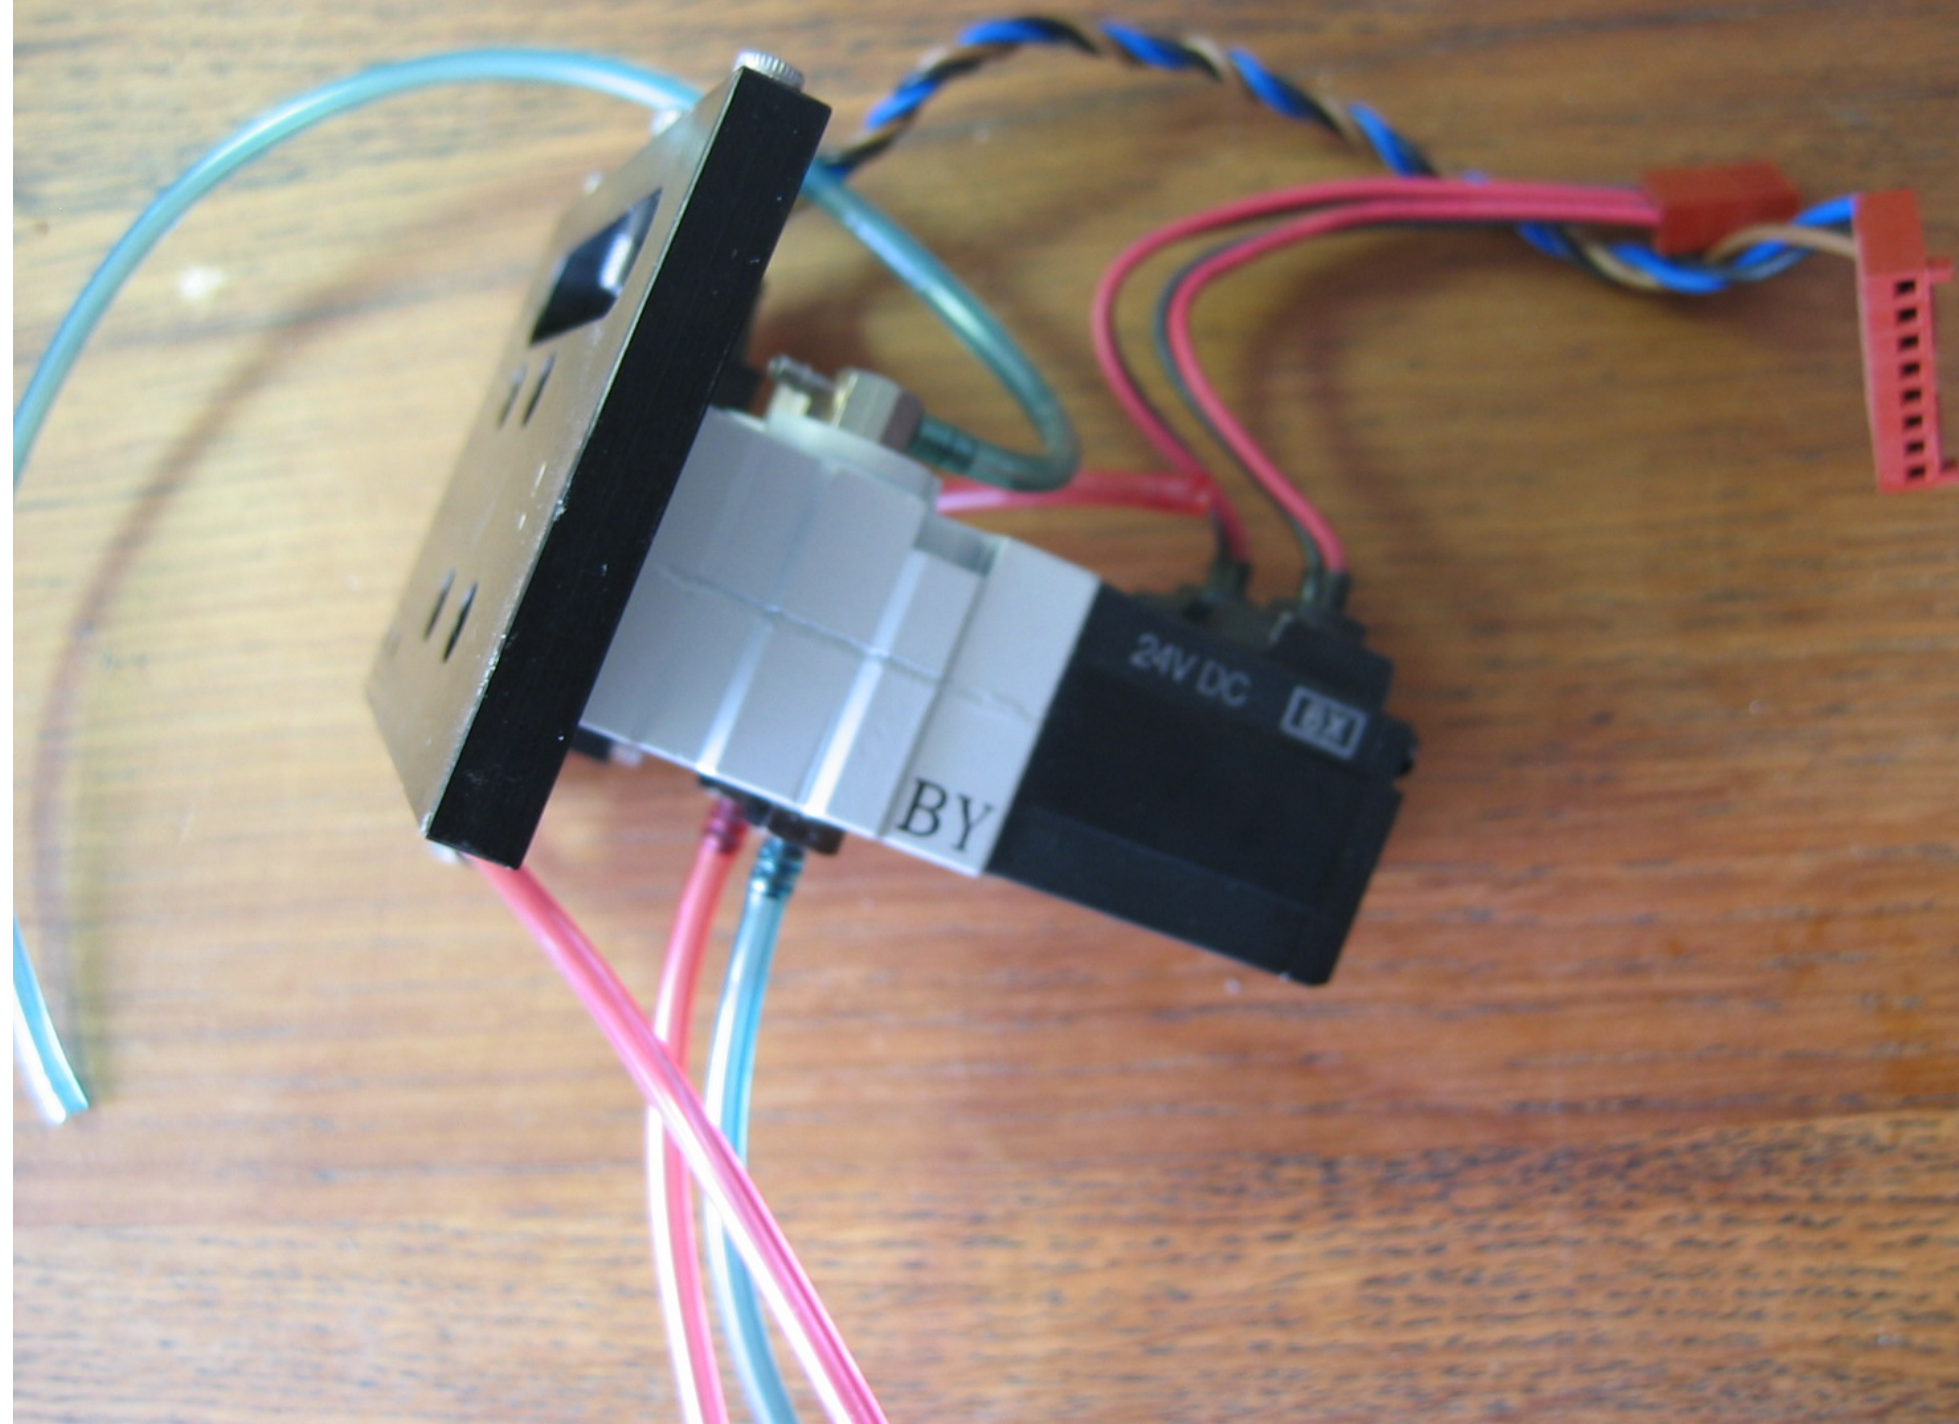

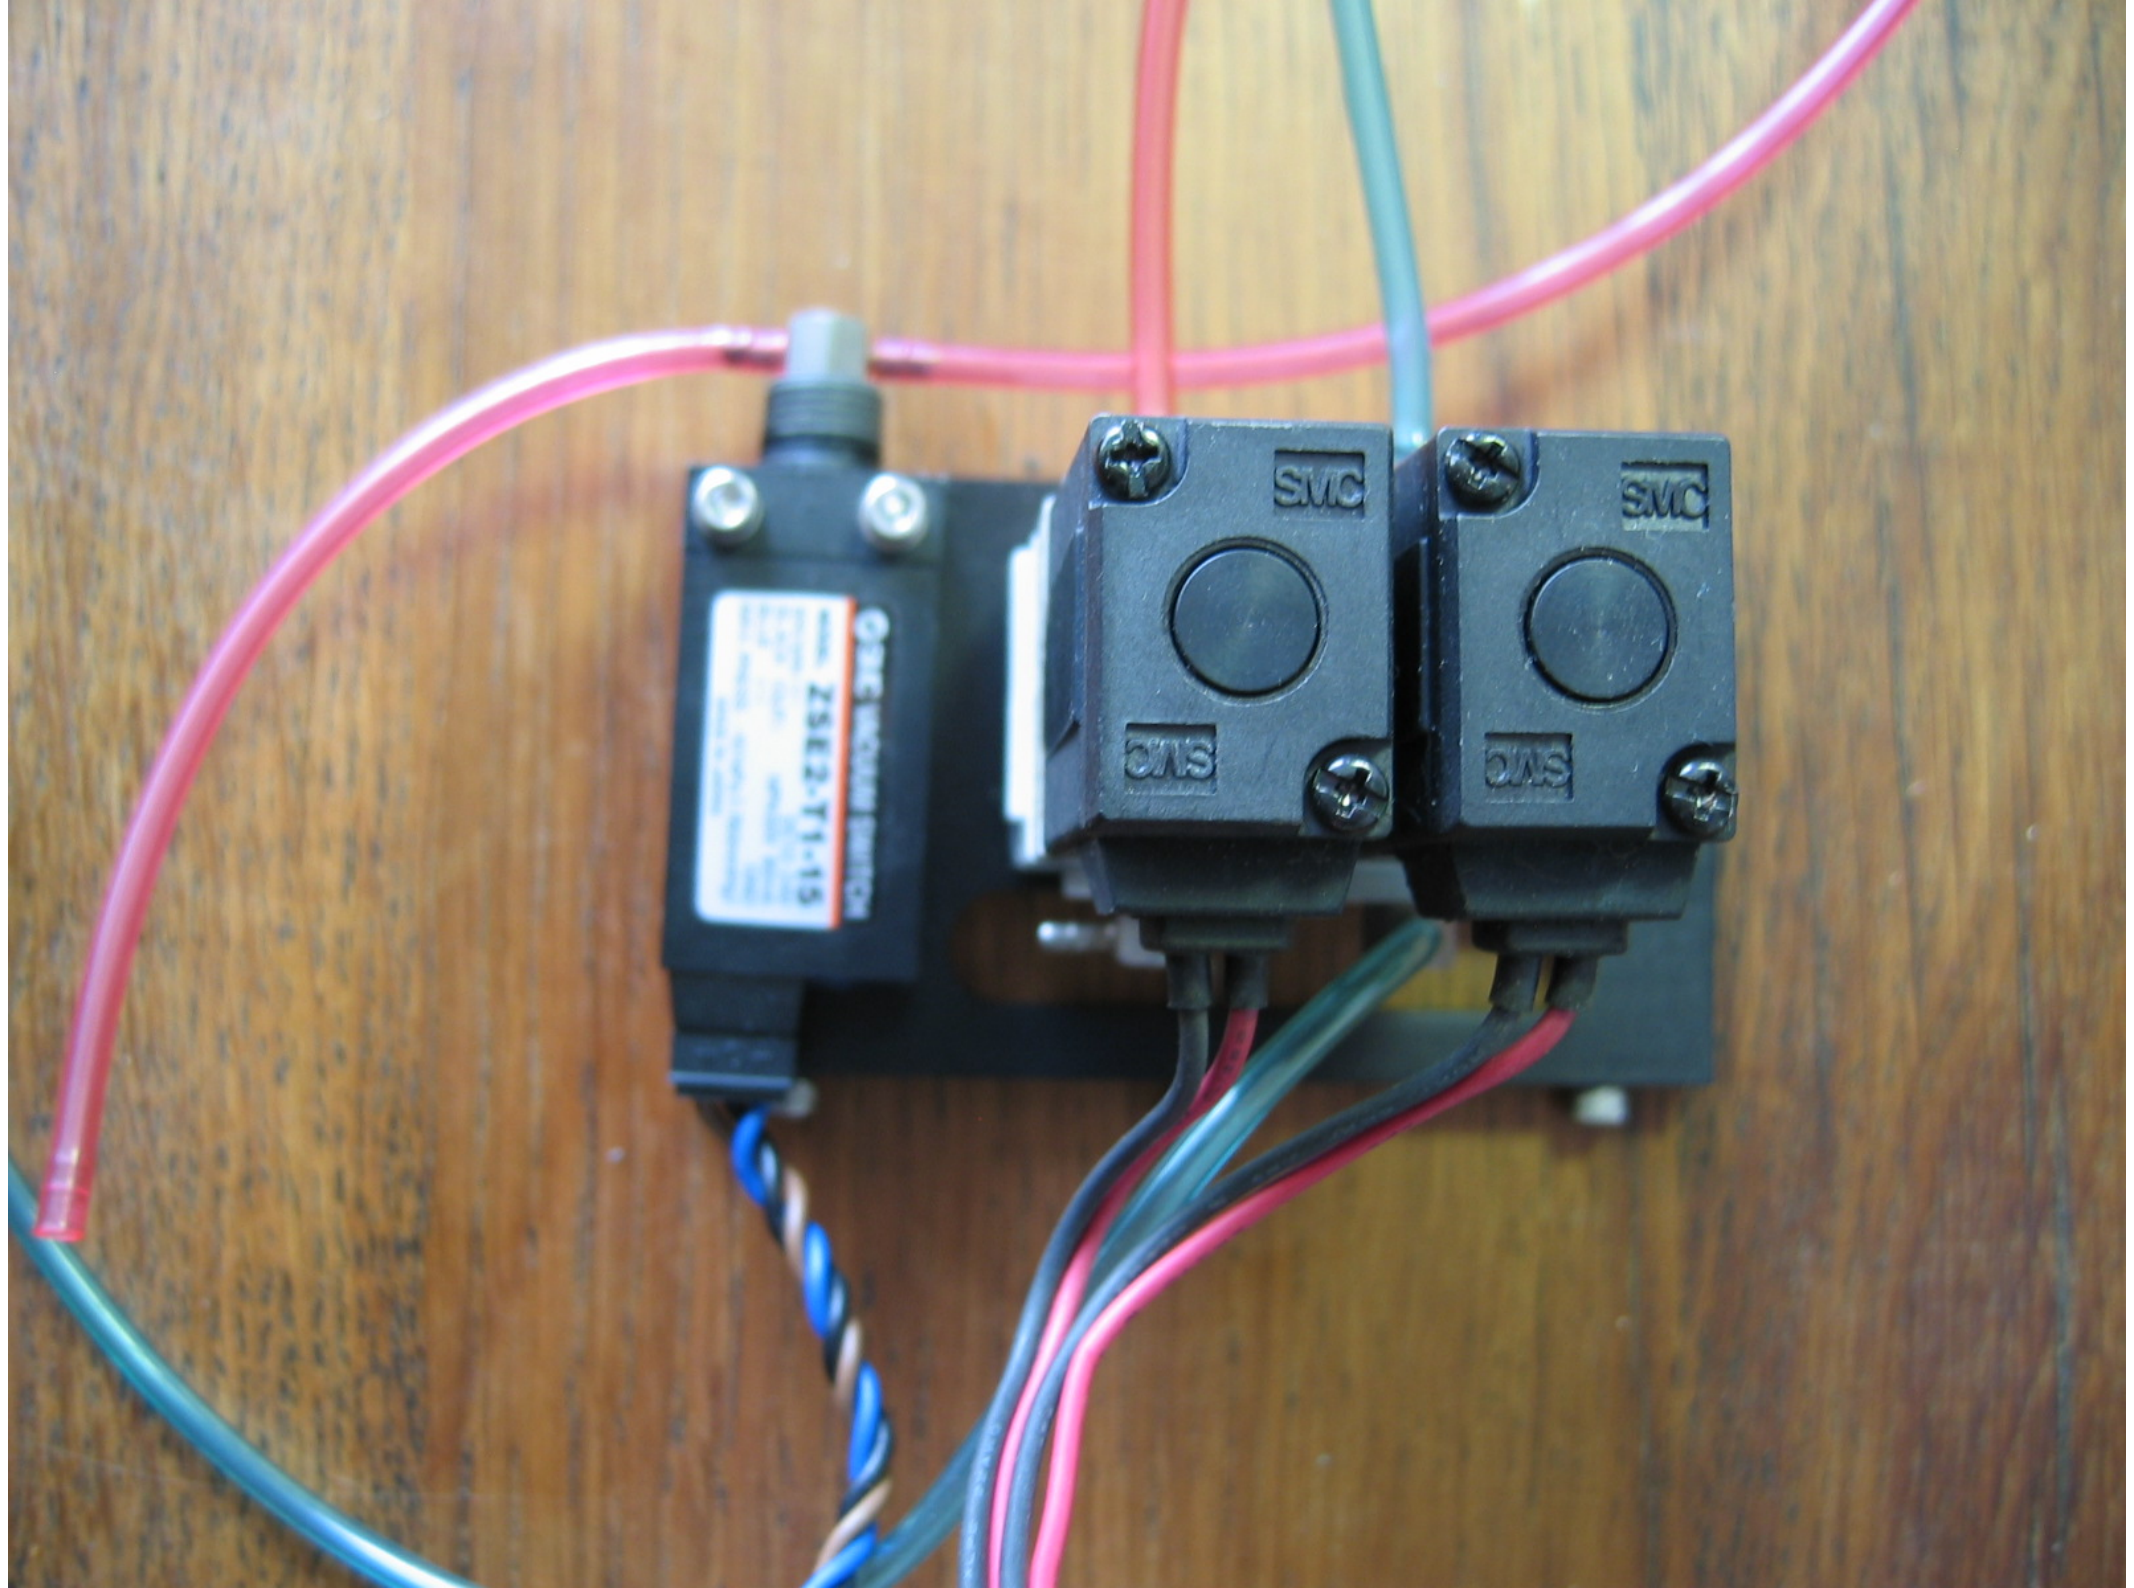

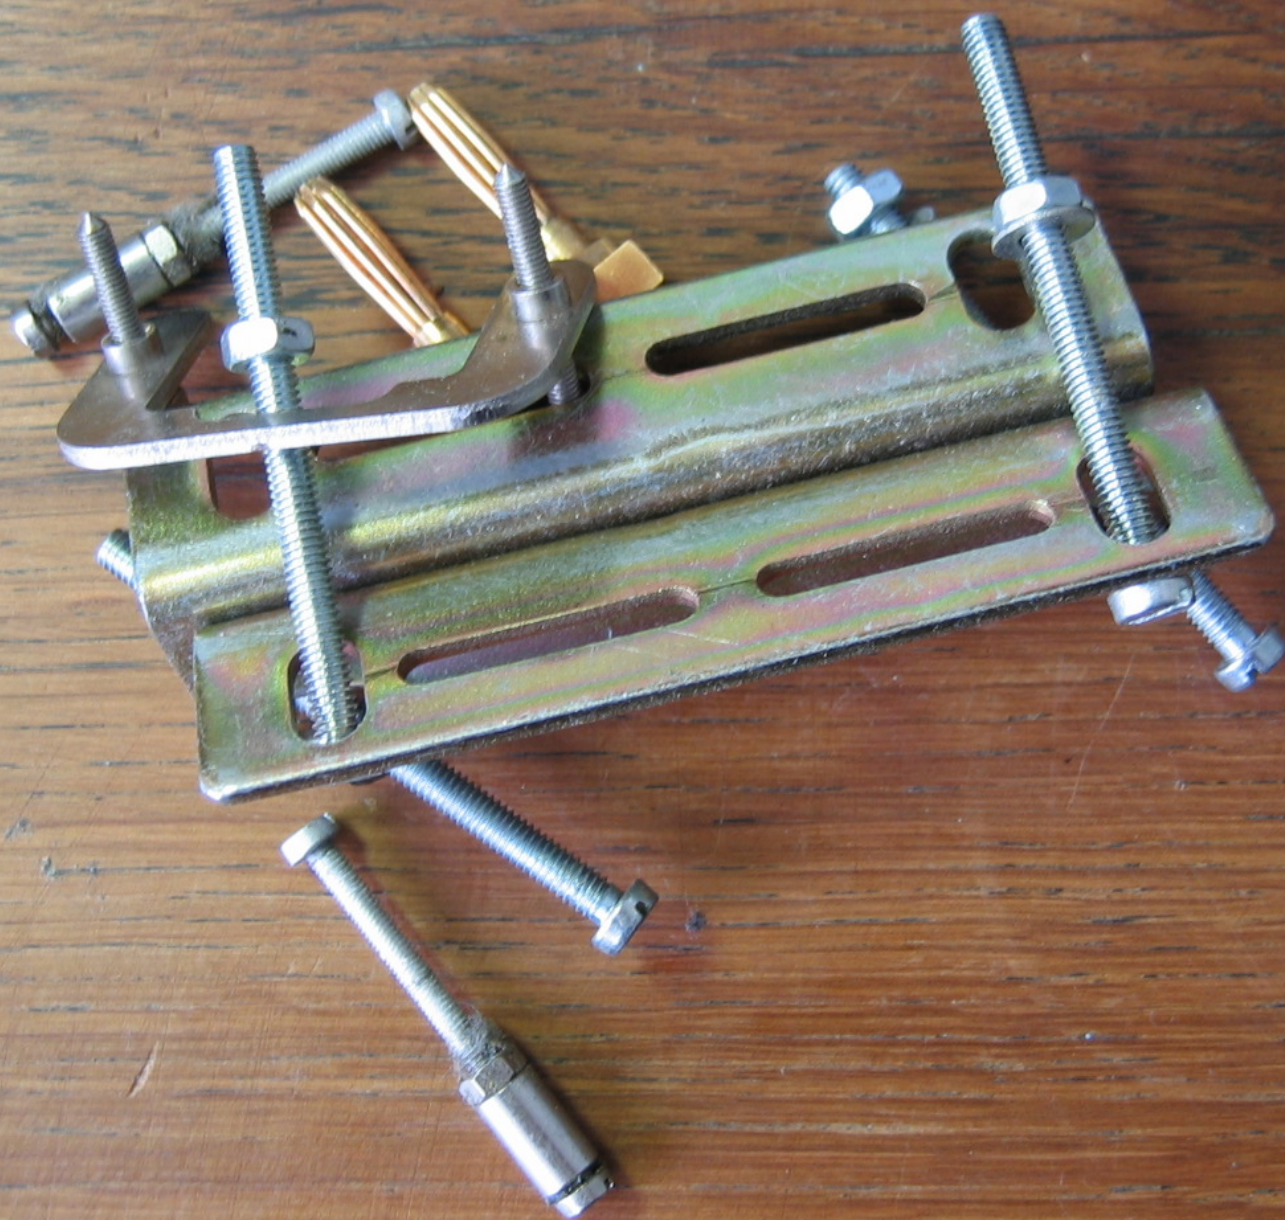









Omron JAPAN
E1-G
○ BN 10 to 40 VDC
○ BK 200mA Max
○ BLJ

5

10-48VDC
OUTPUT
















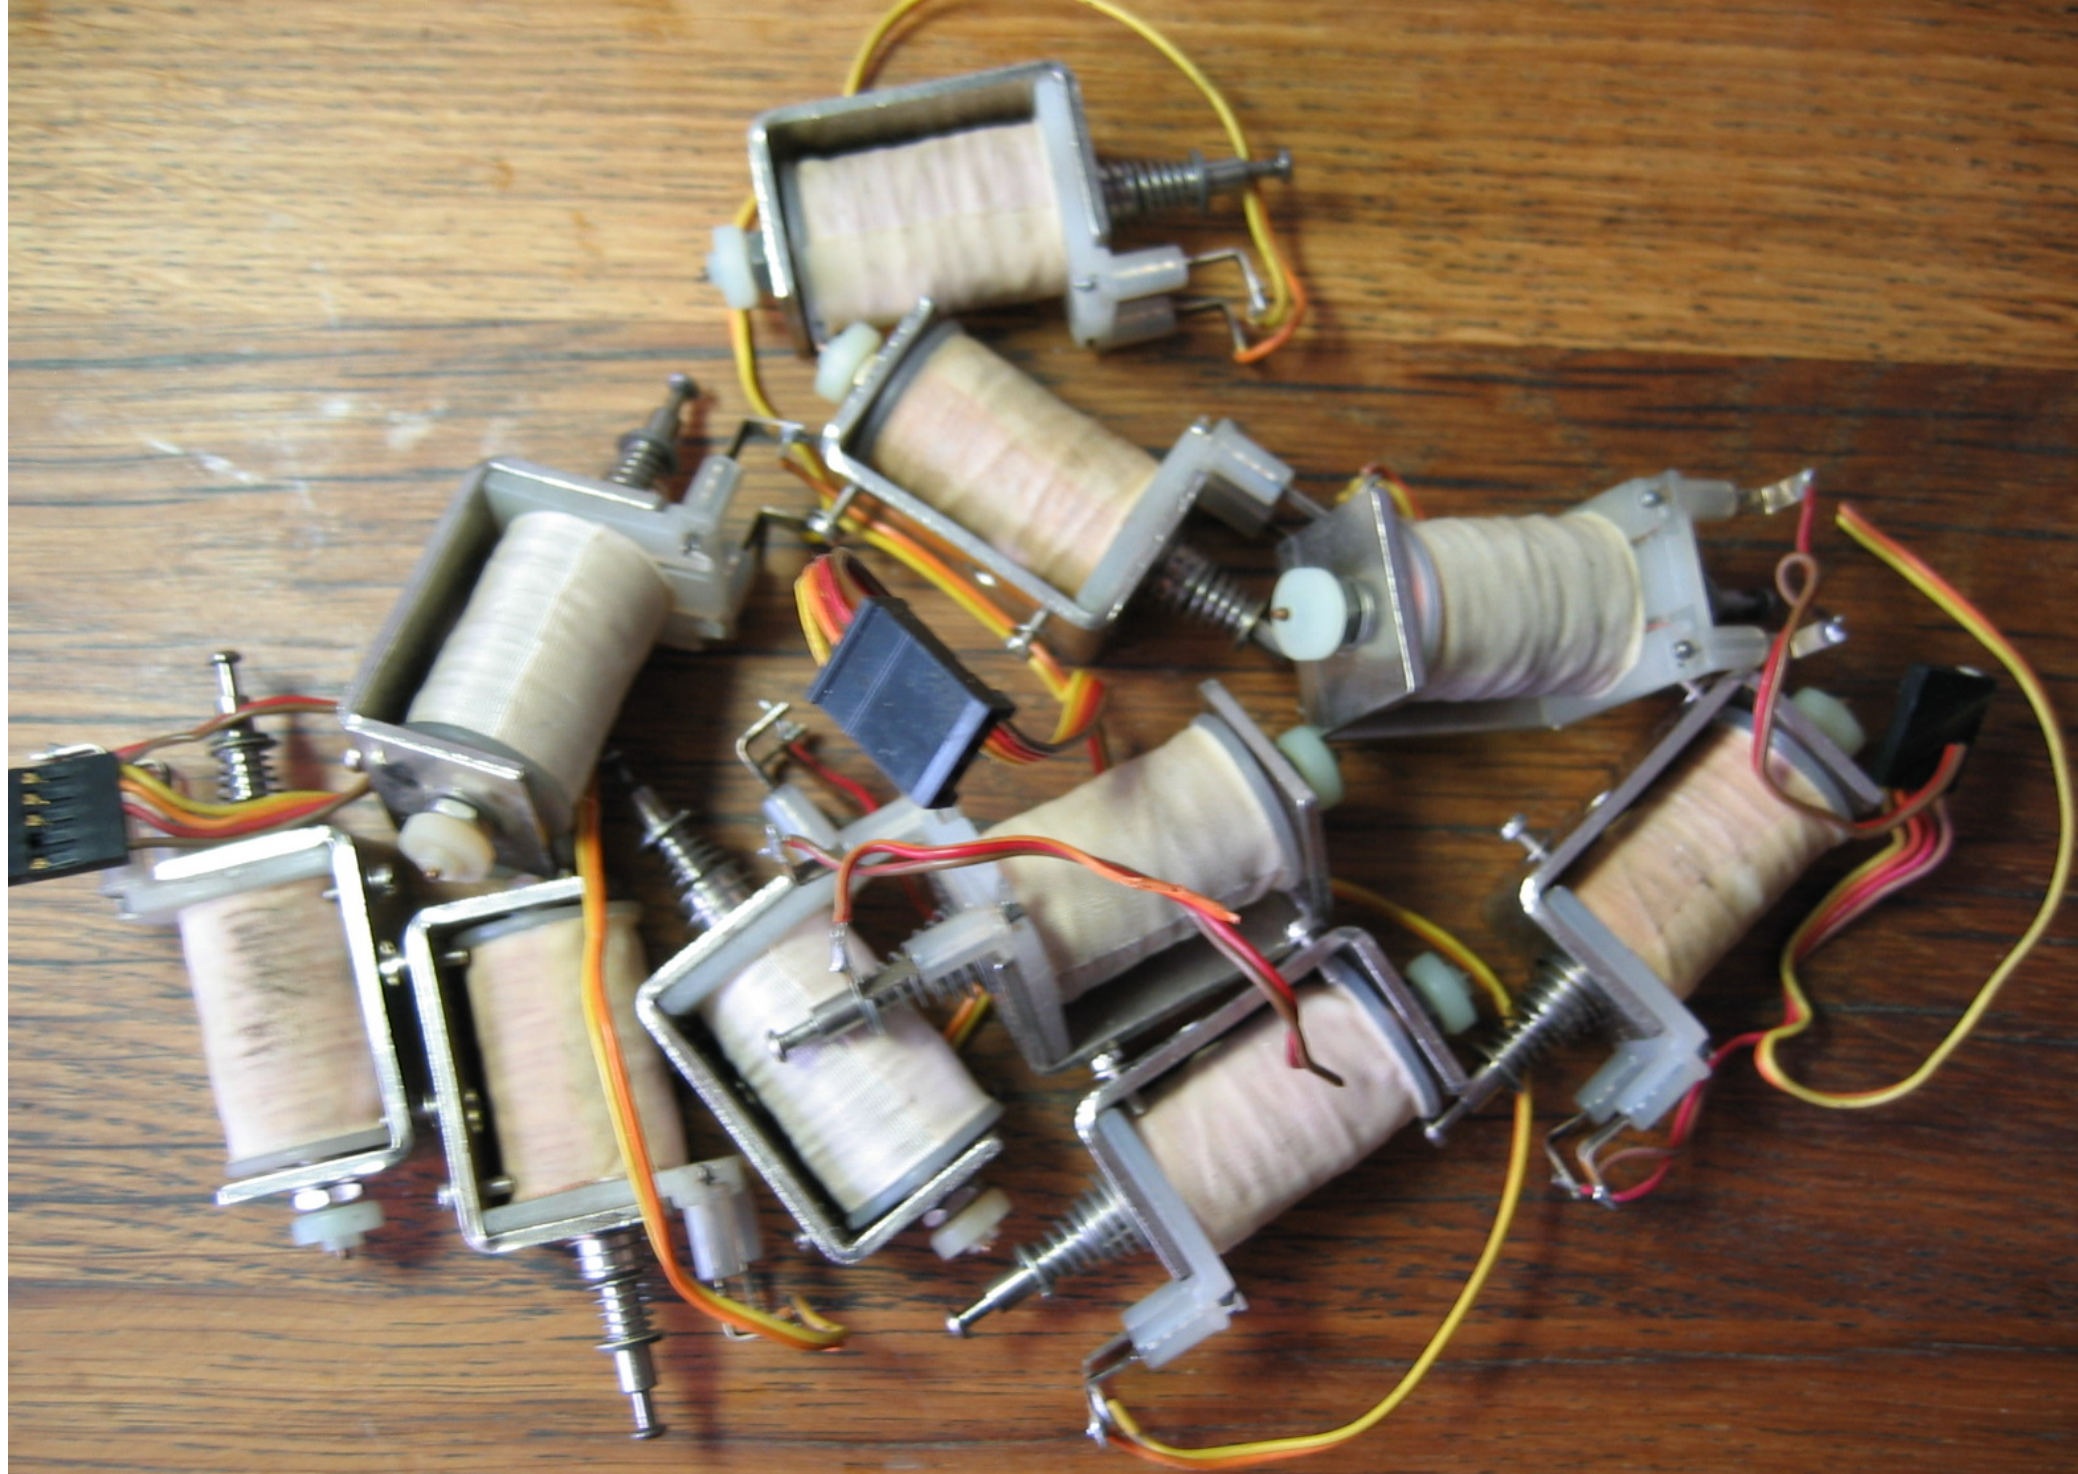





























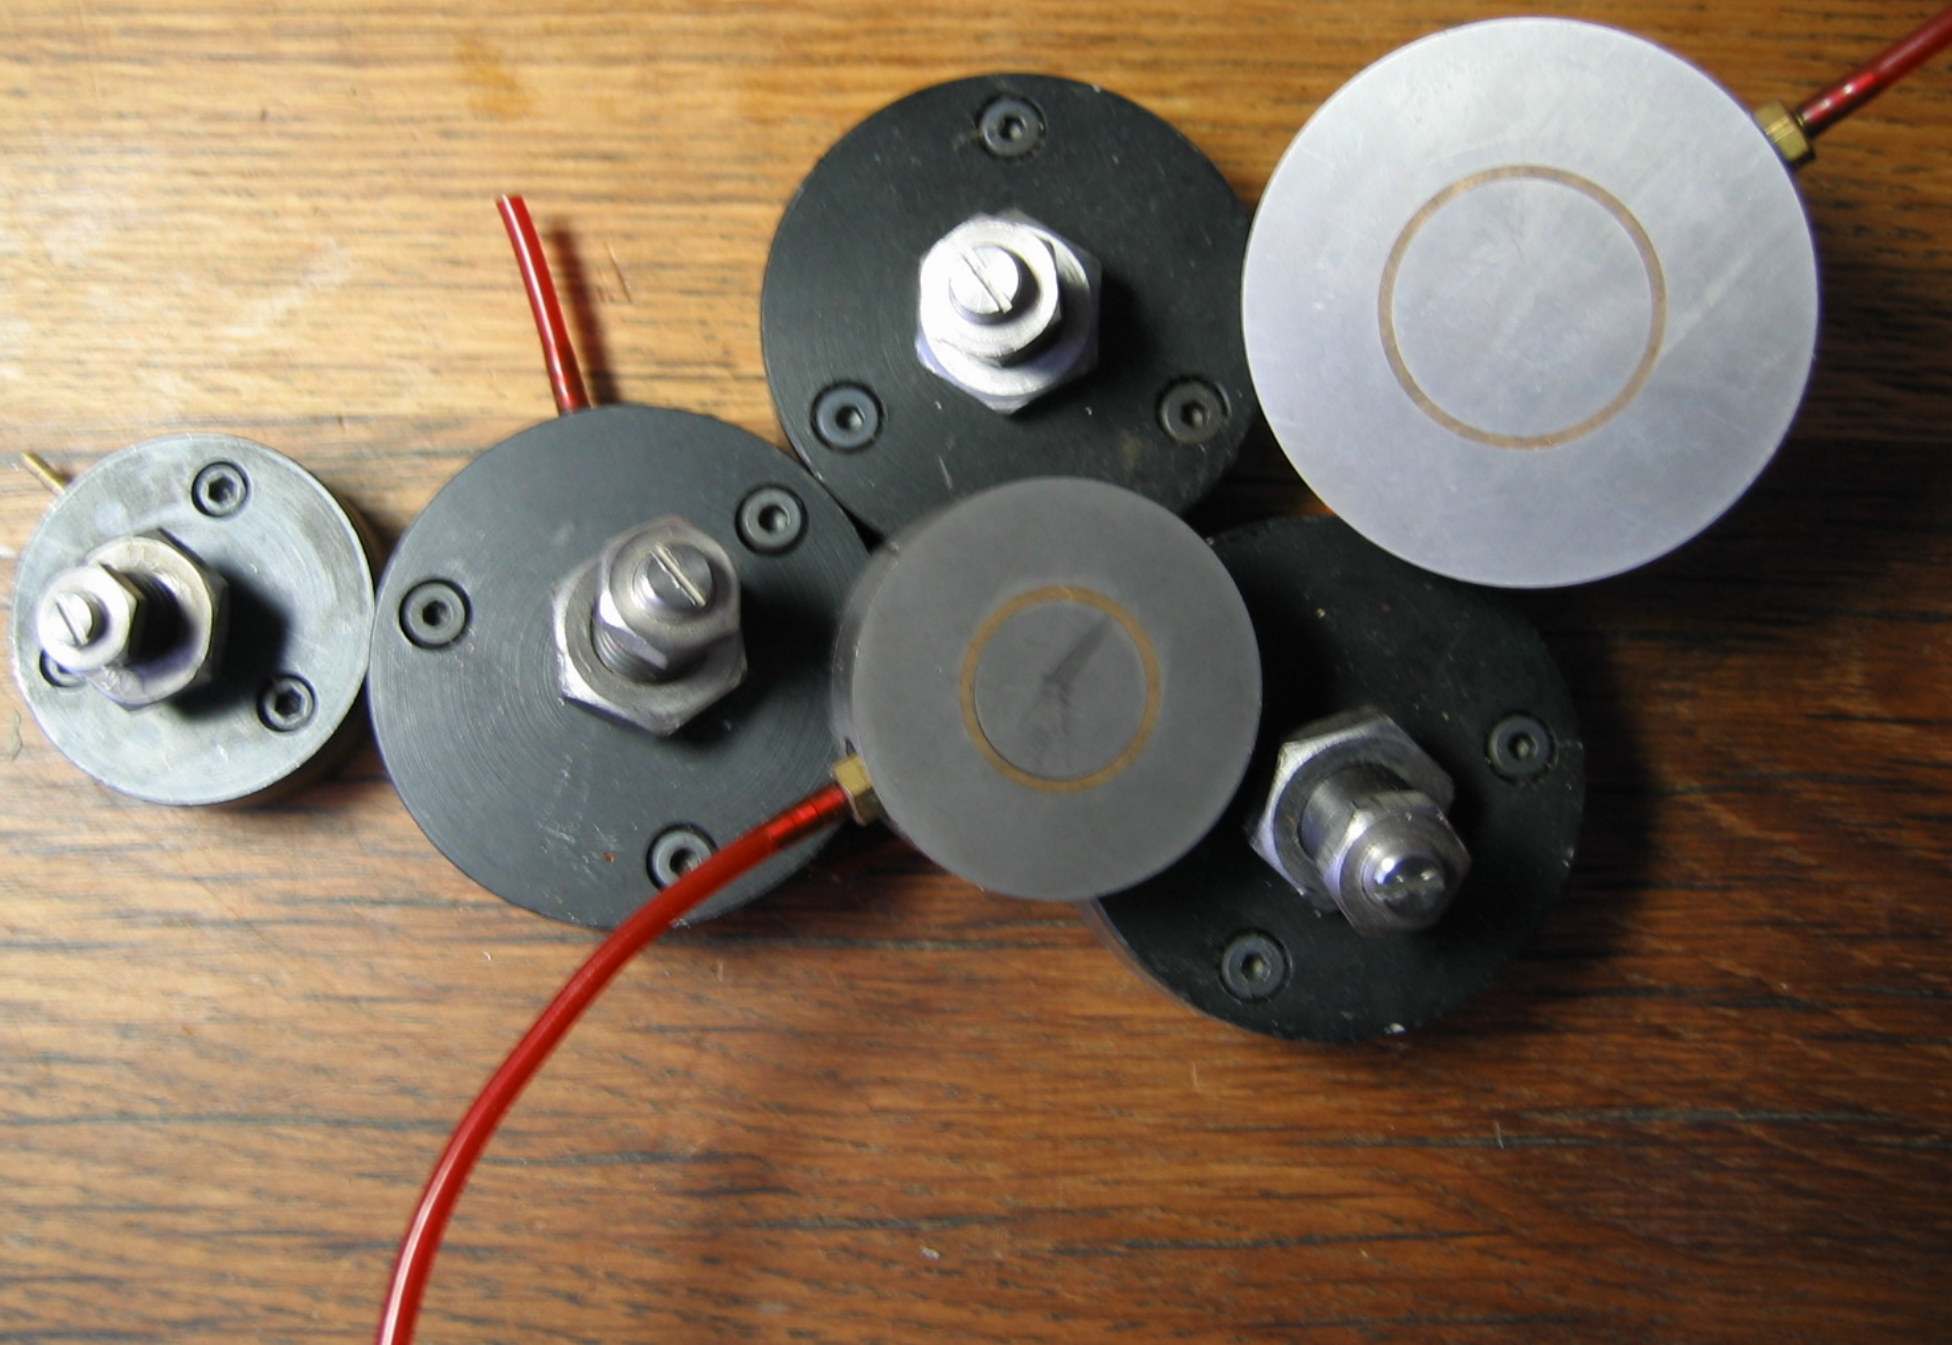

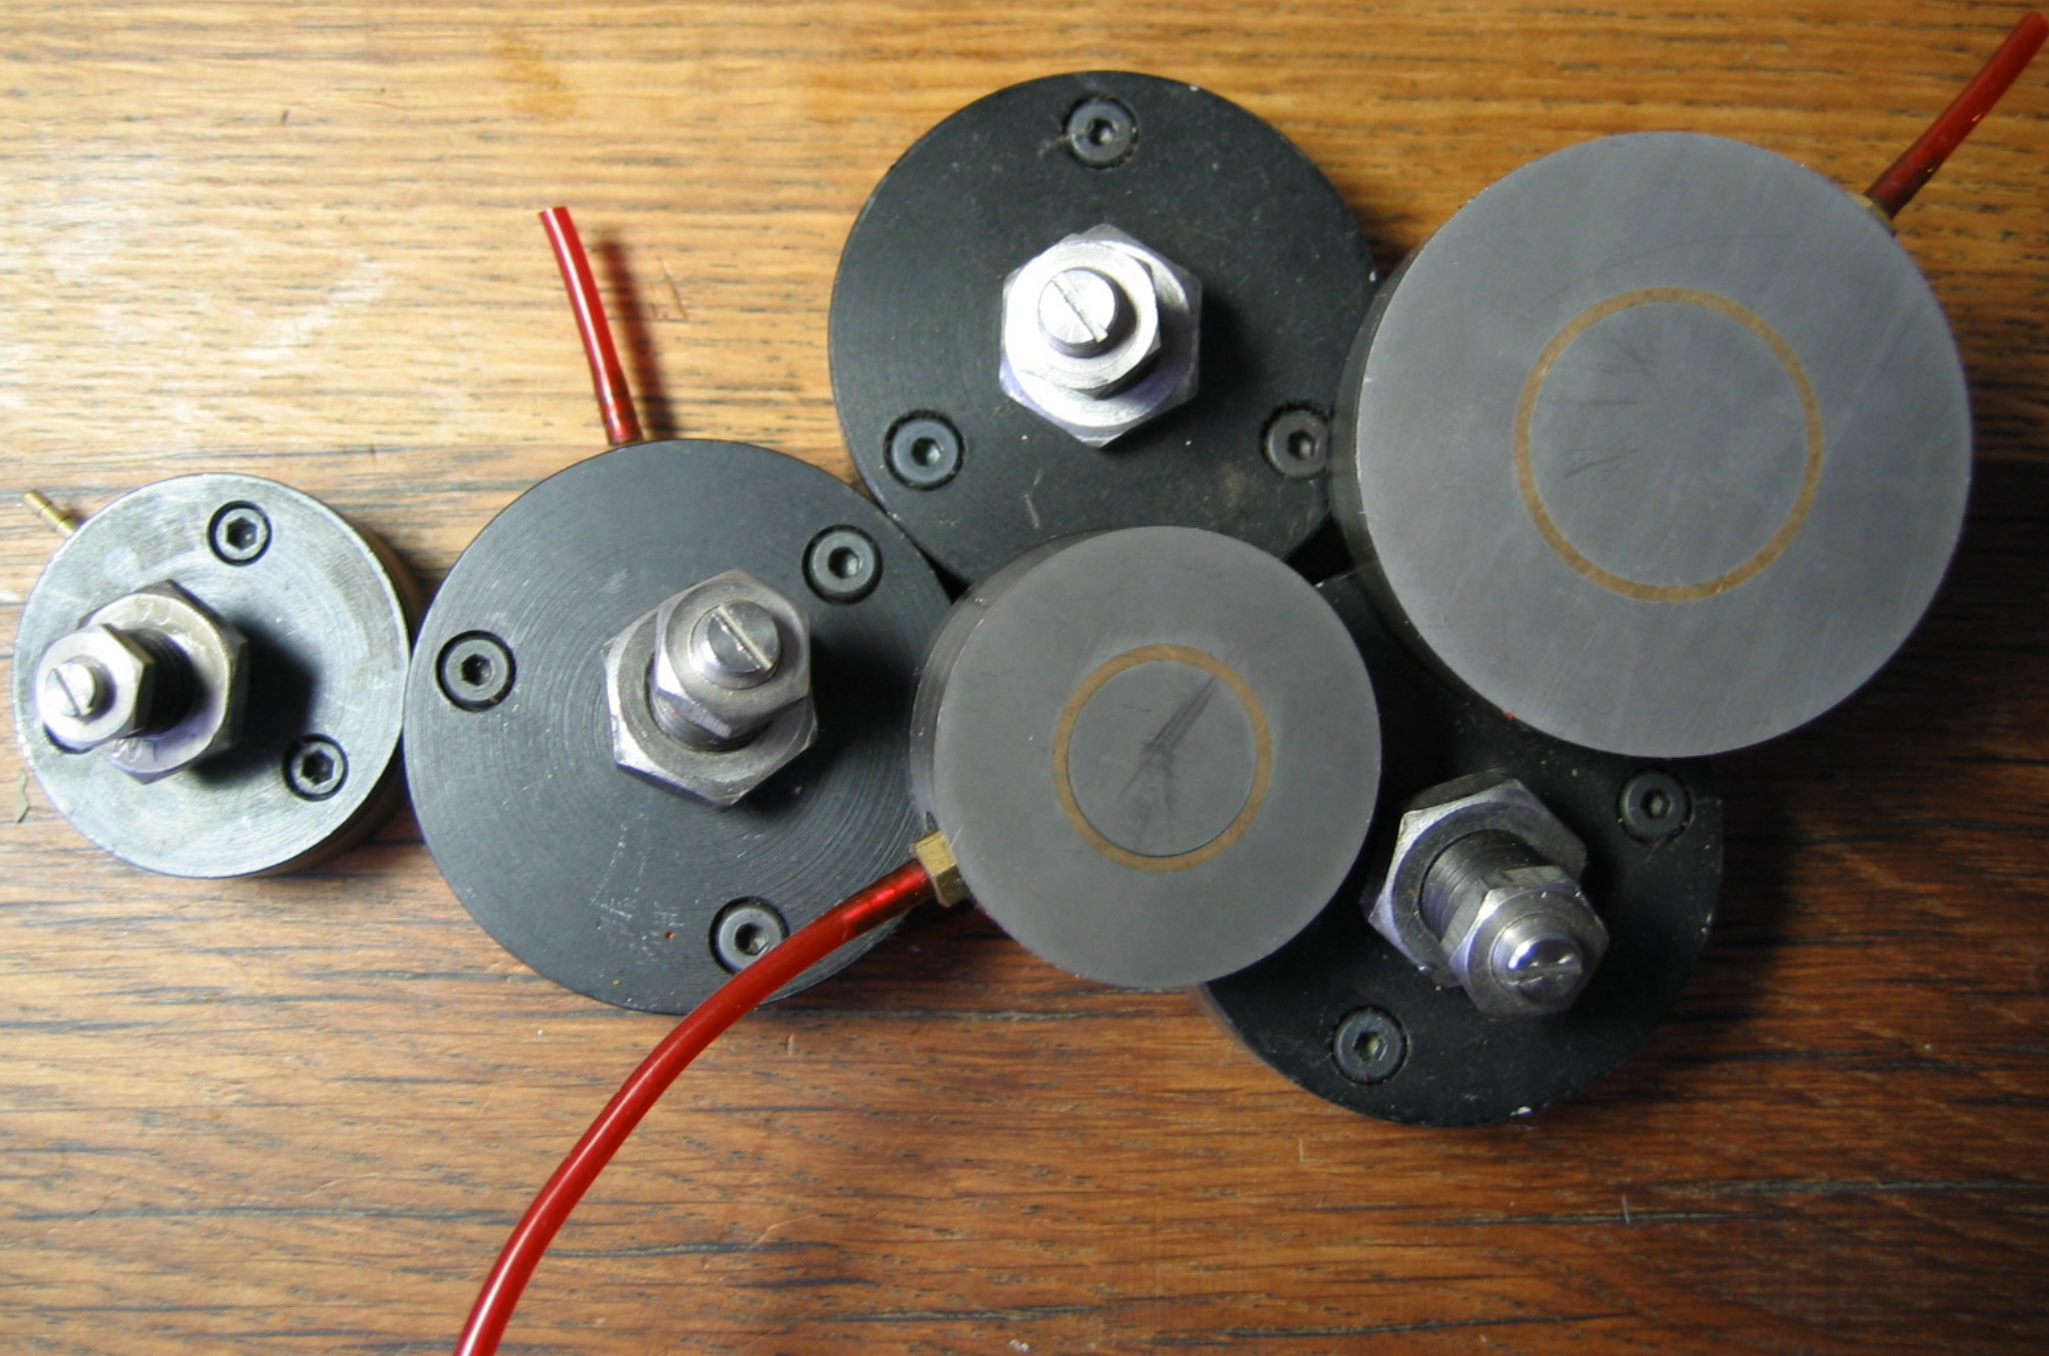






















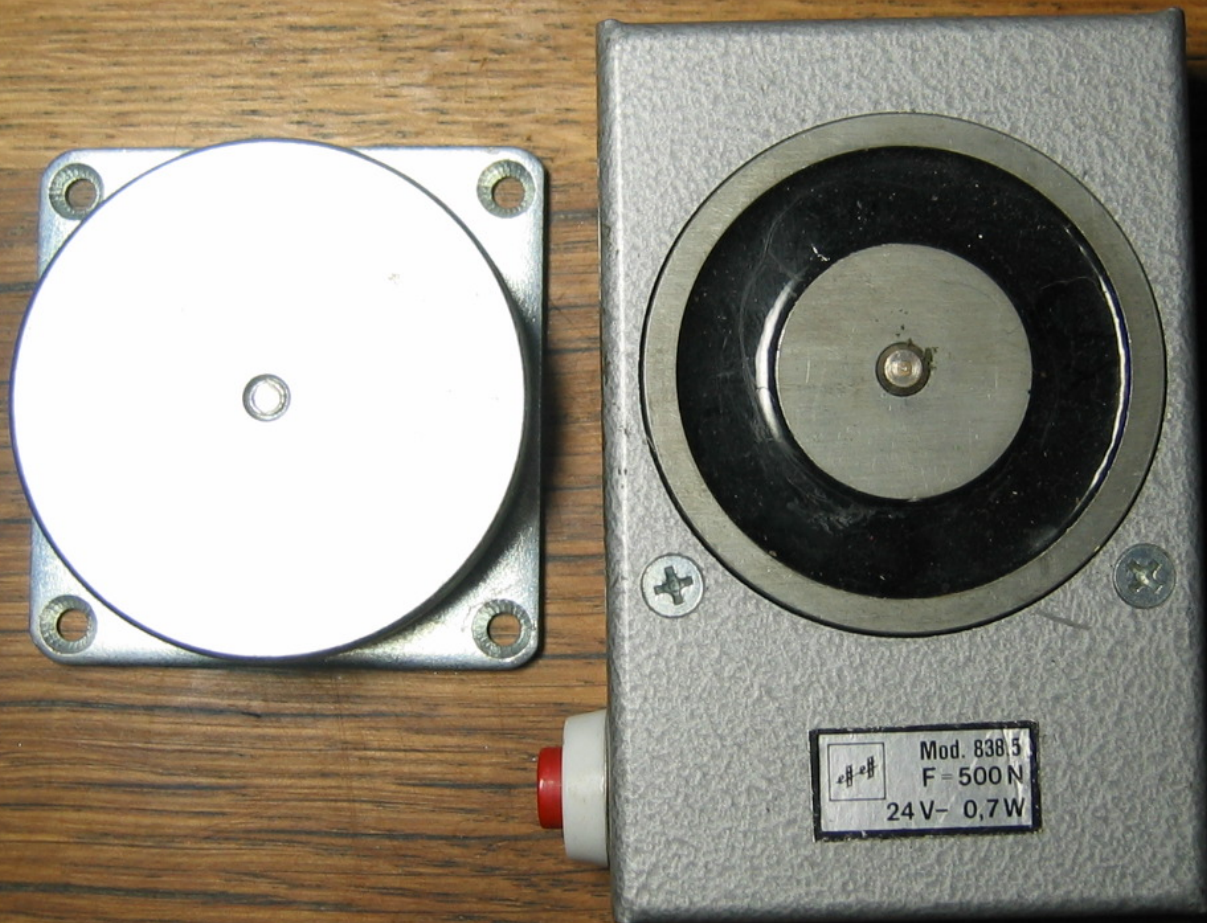



Mod. 838.5
F = 500 N
24 V - 0,7 W



Mod. 838.5
F=500 N
24 V- 0,7 W



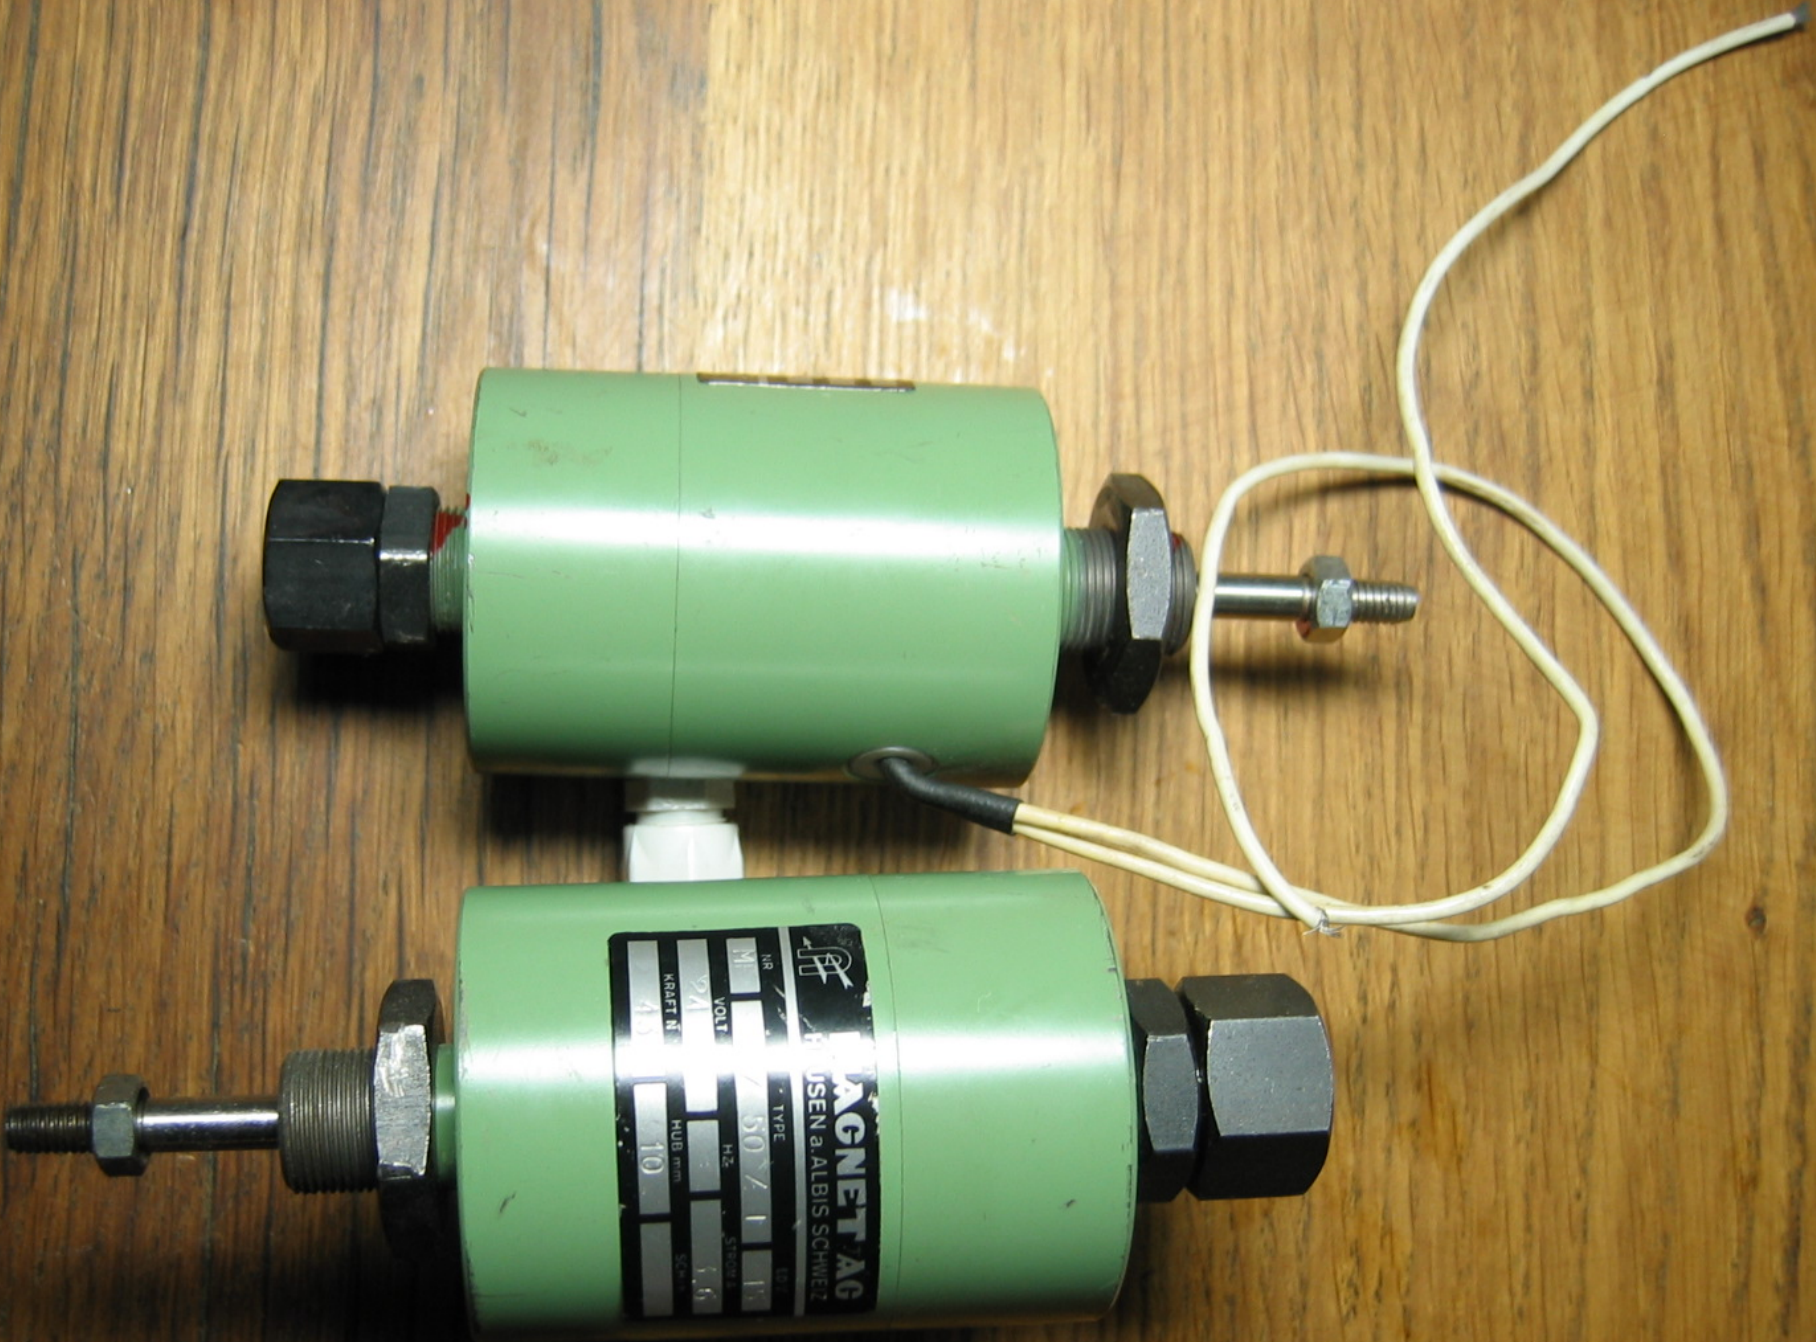

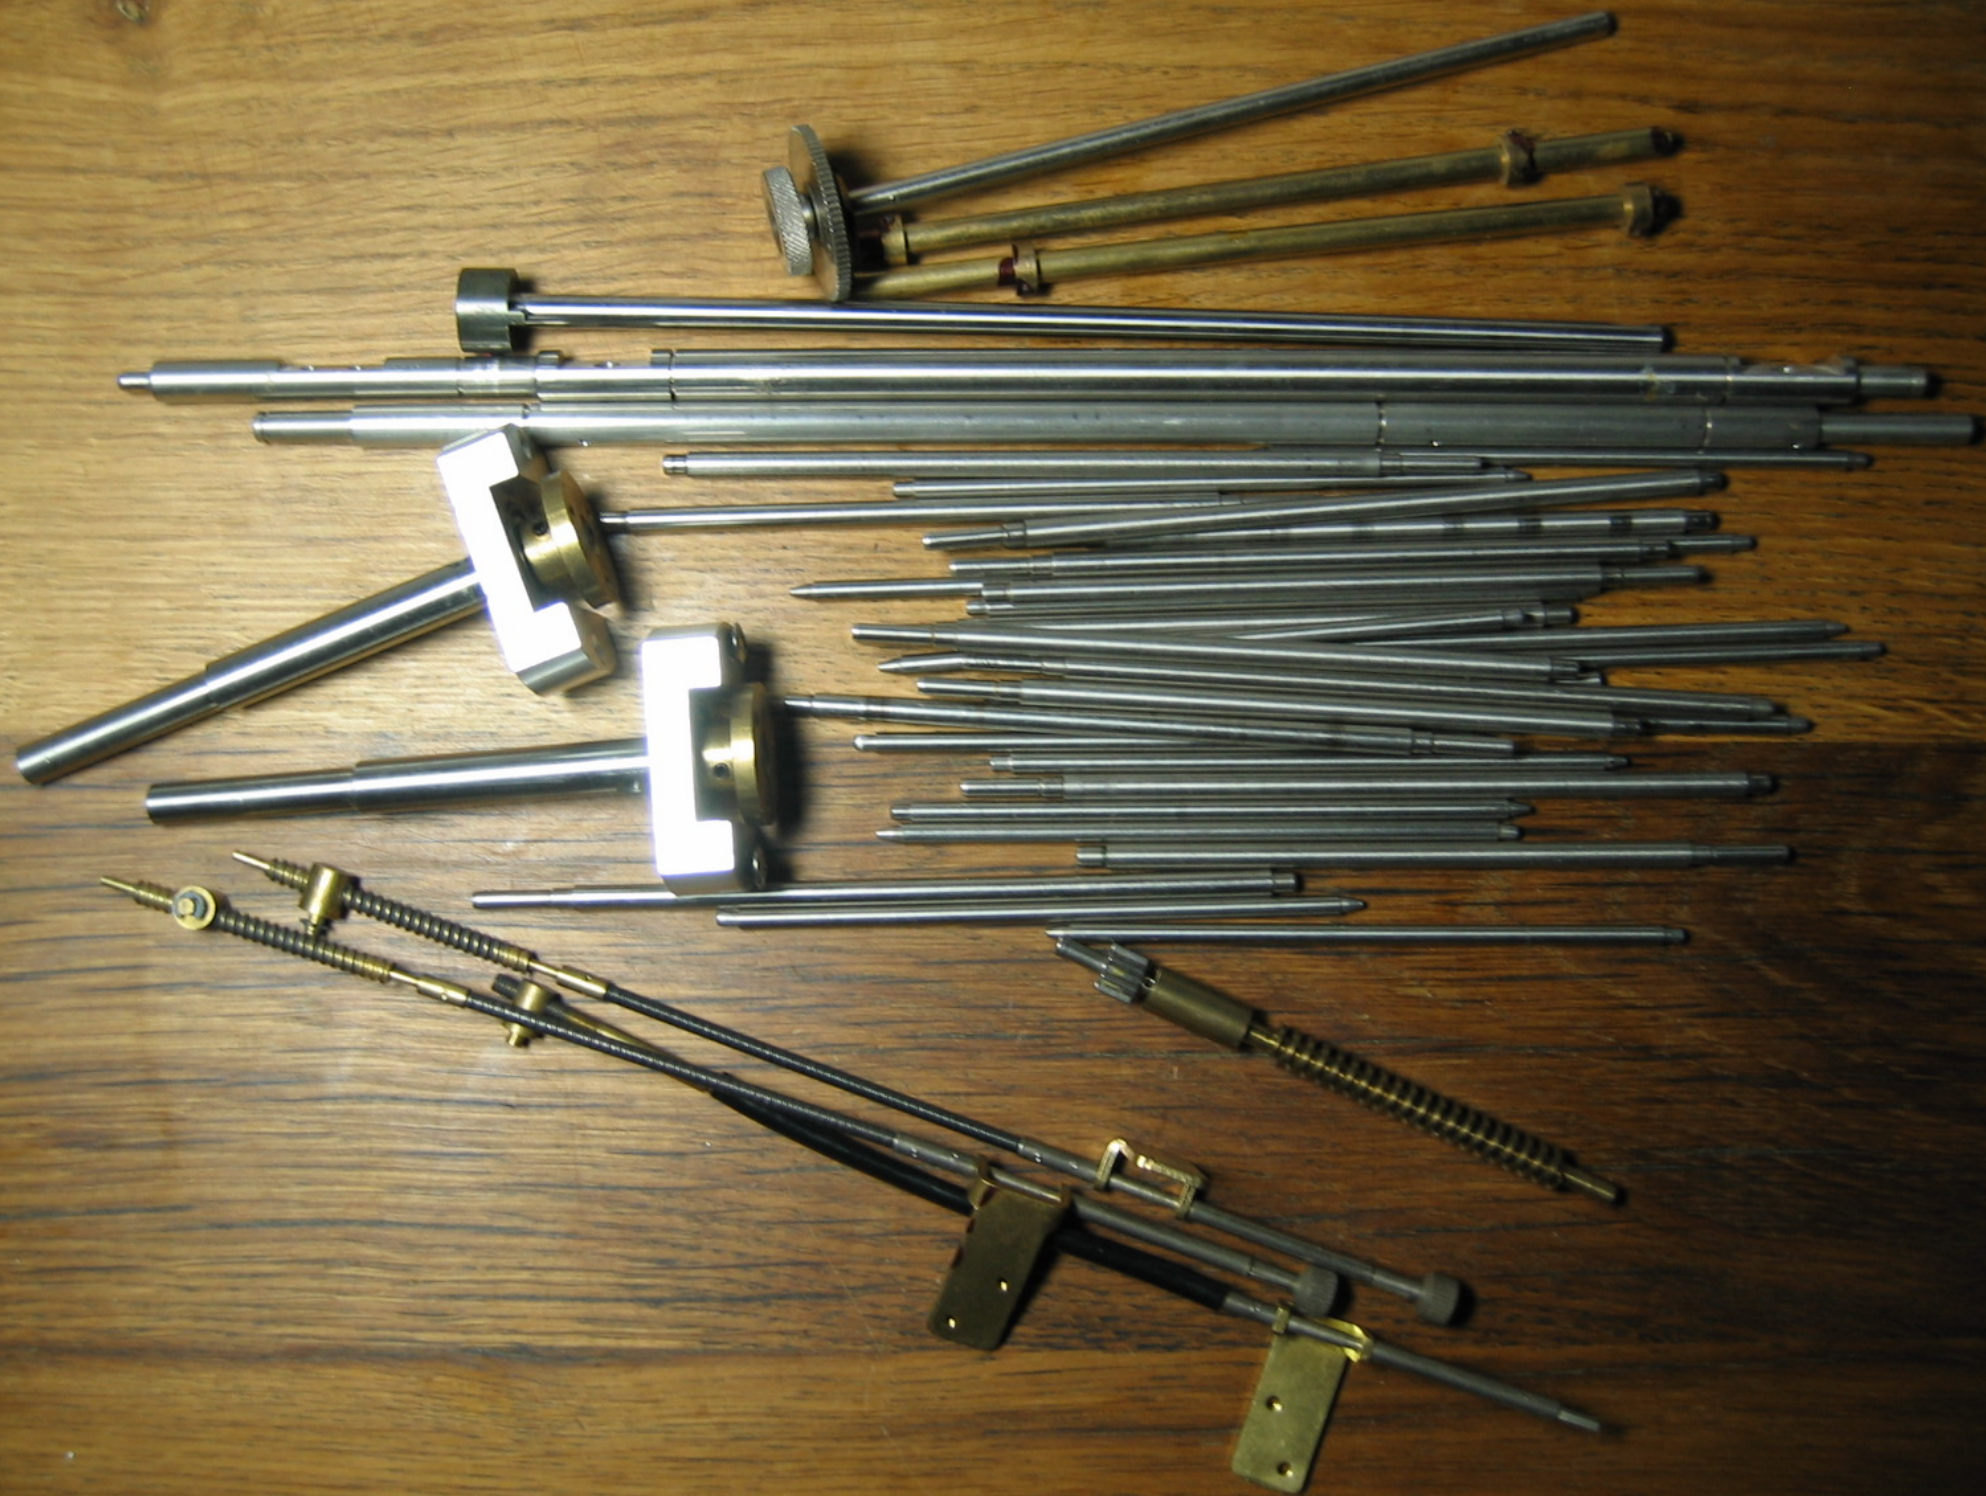


















































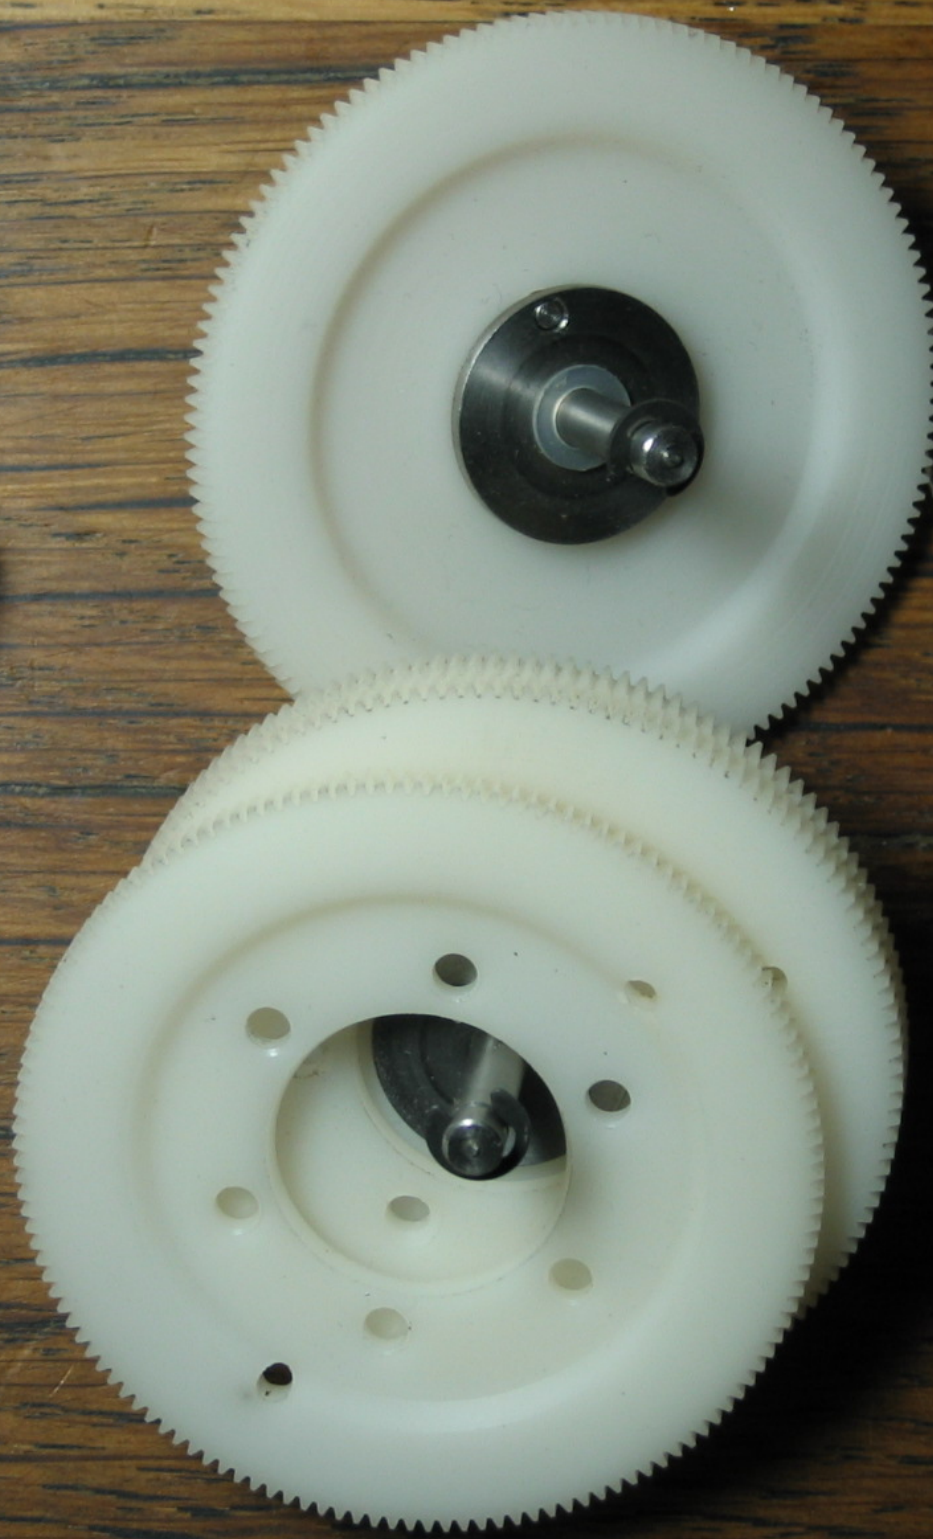




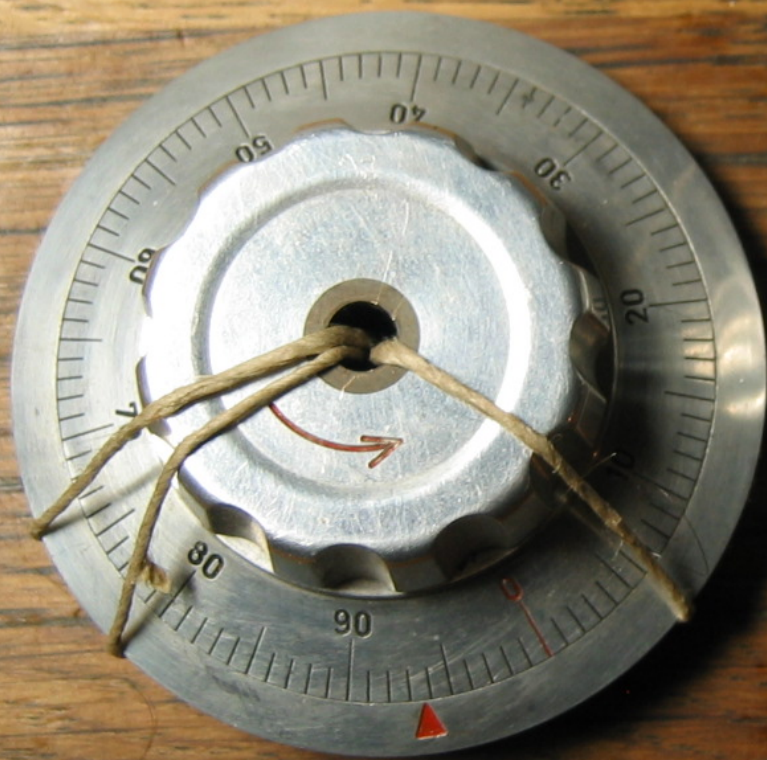


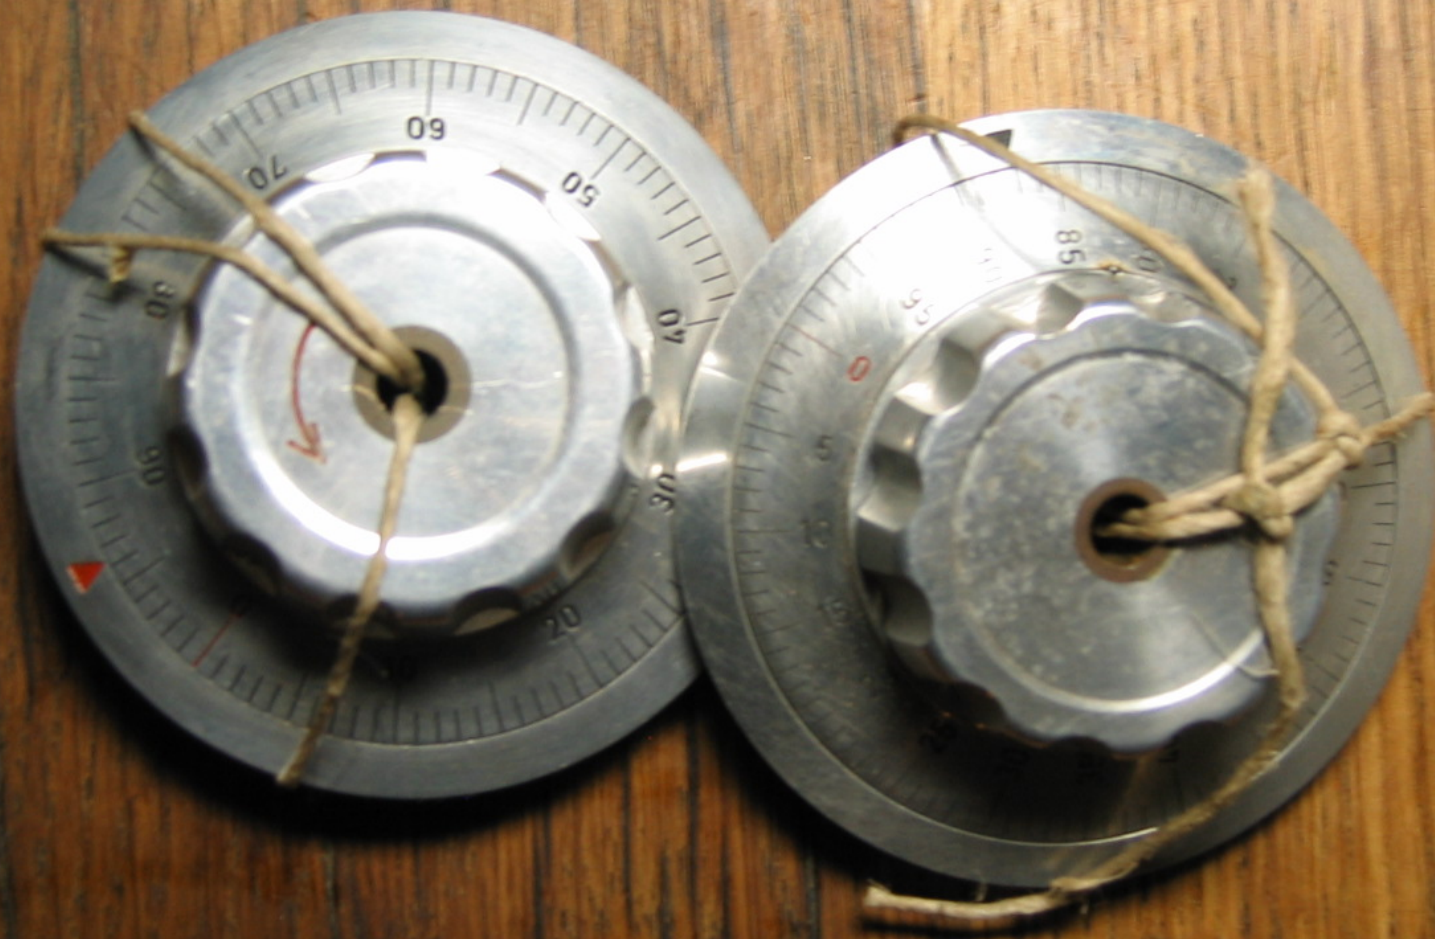






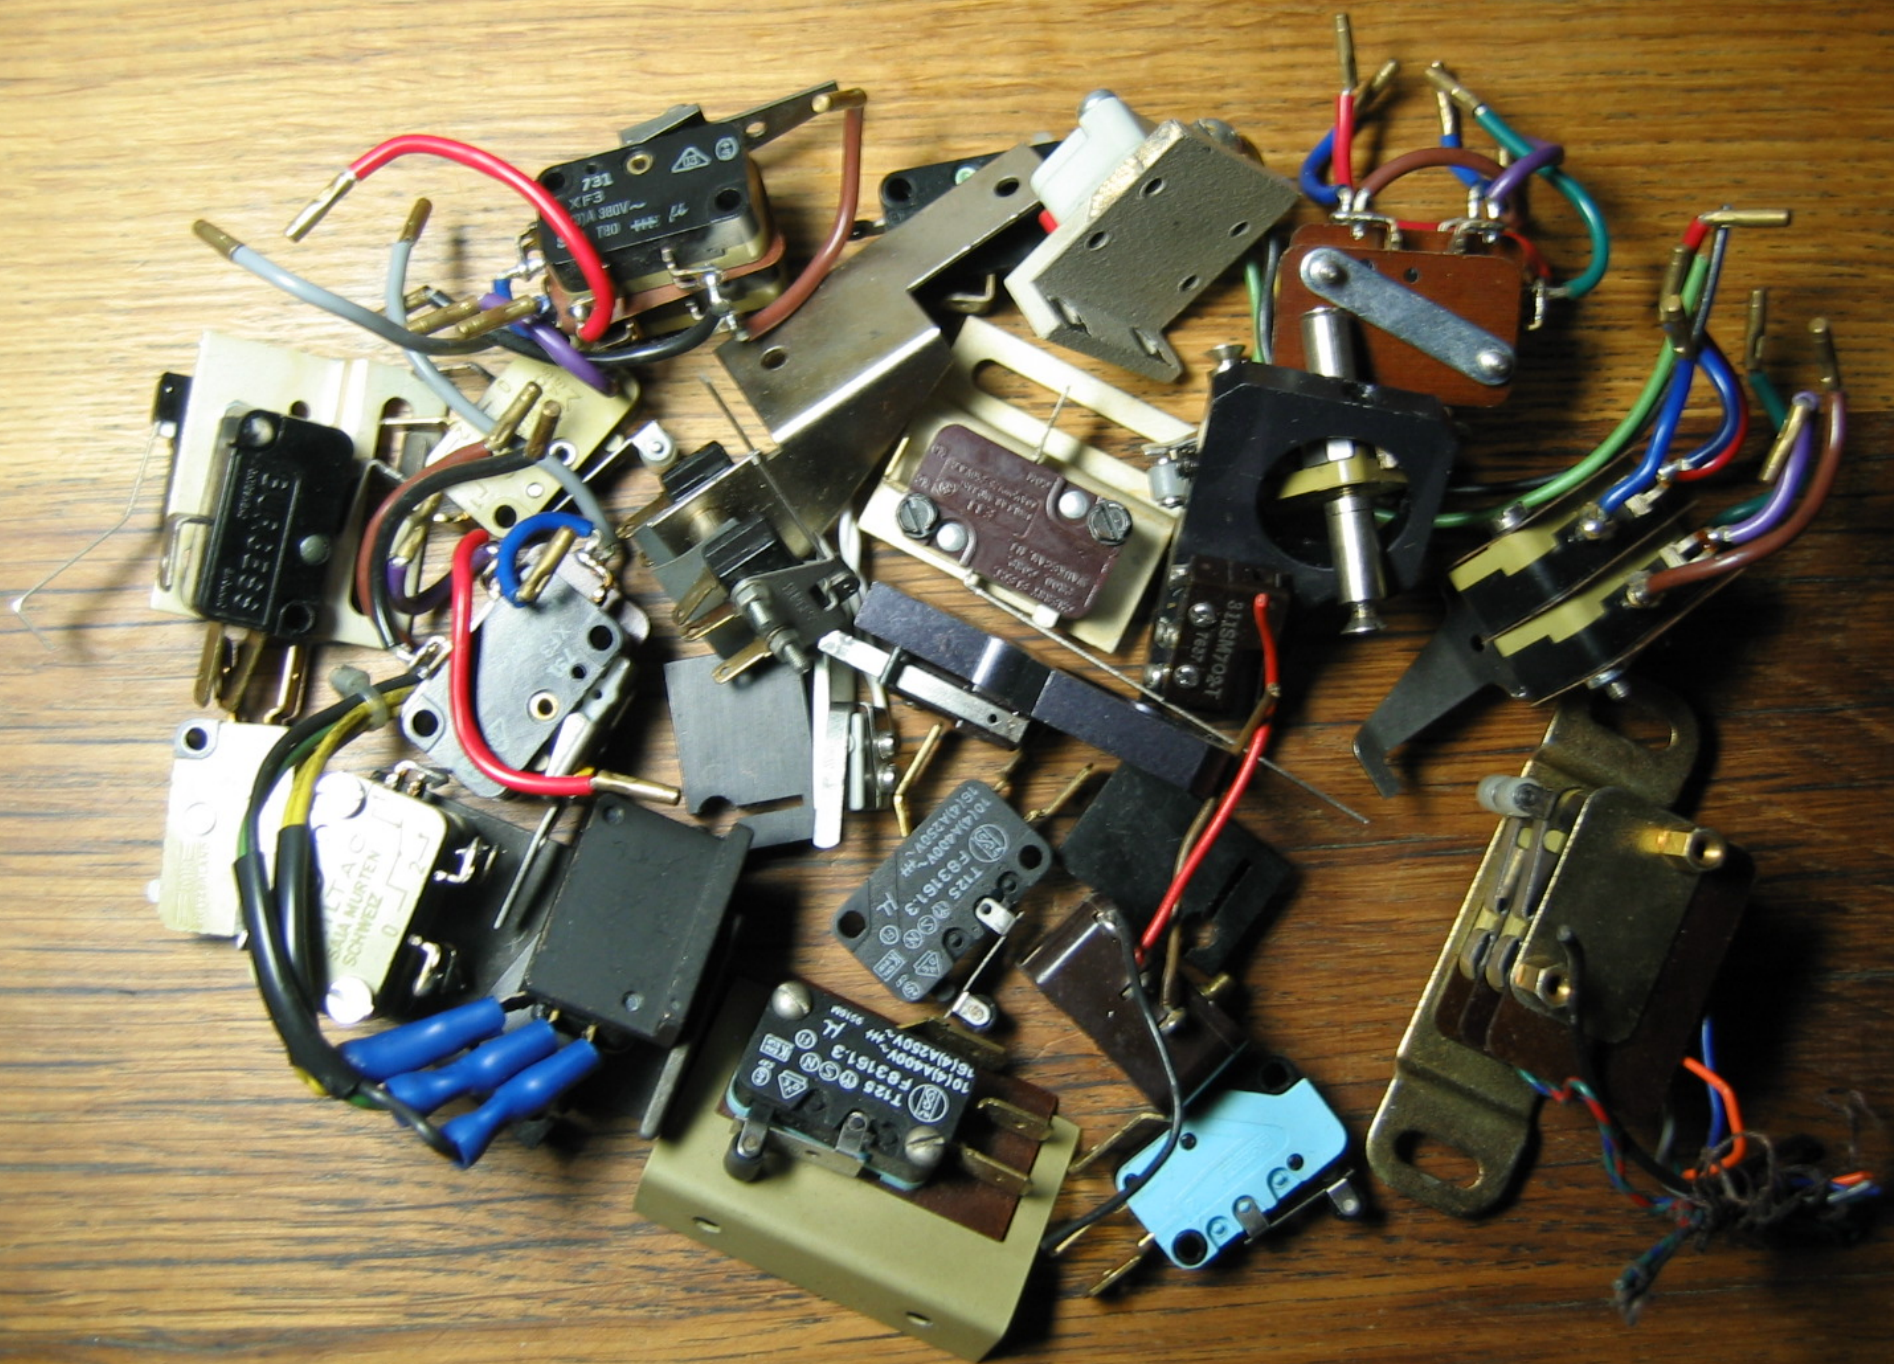


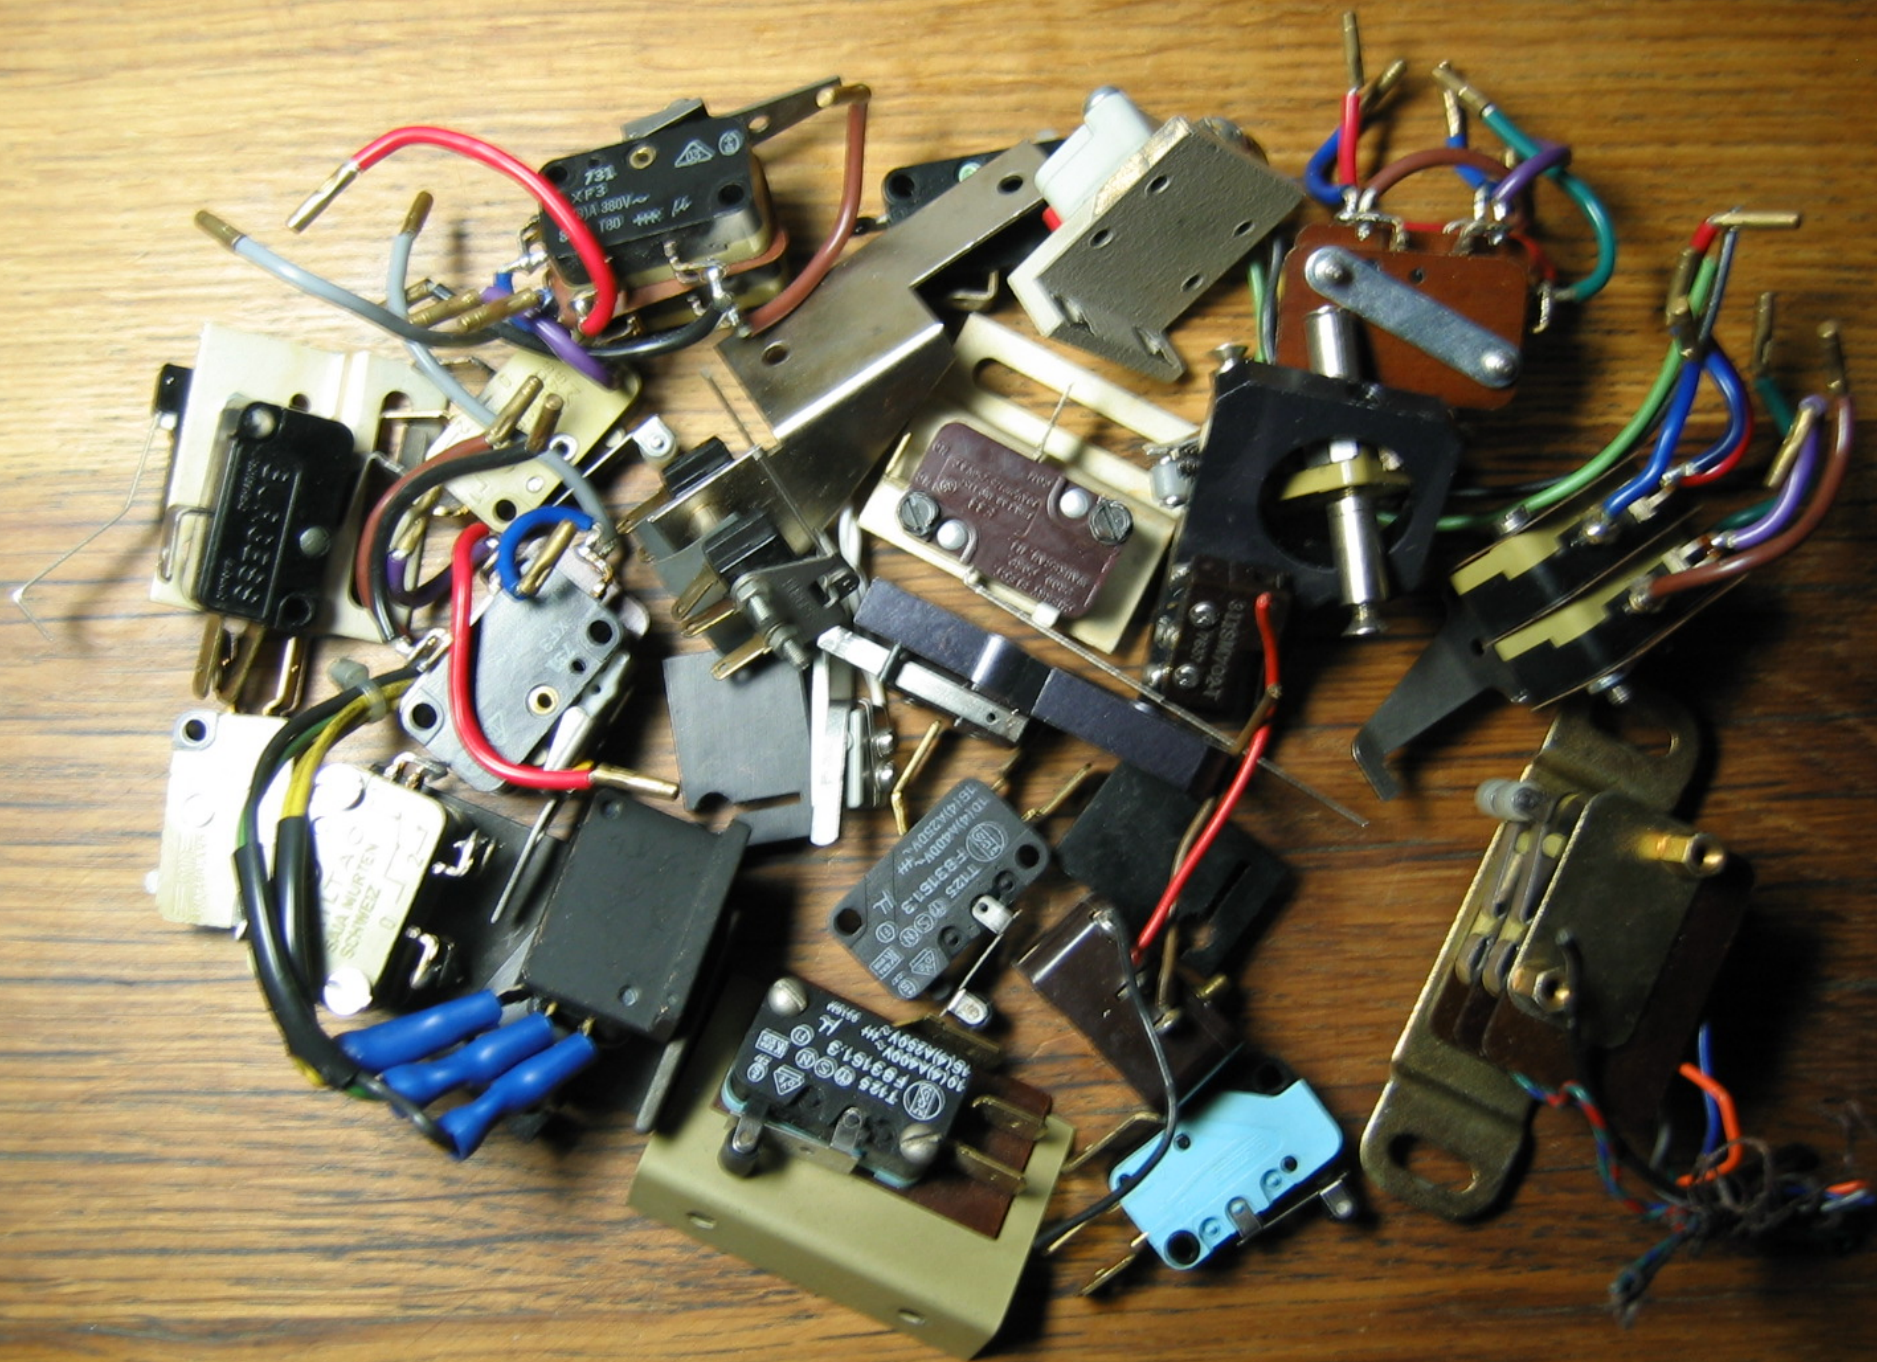





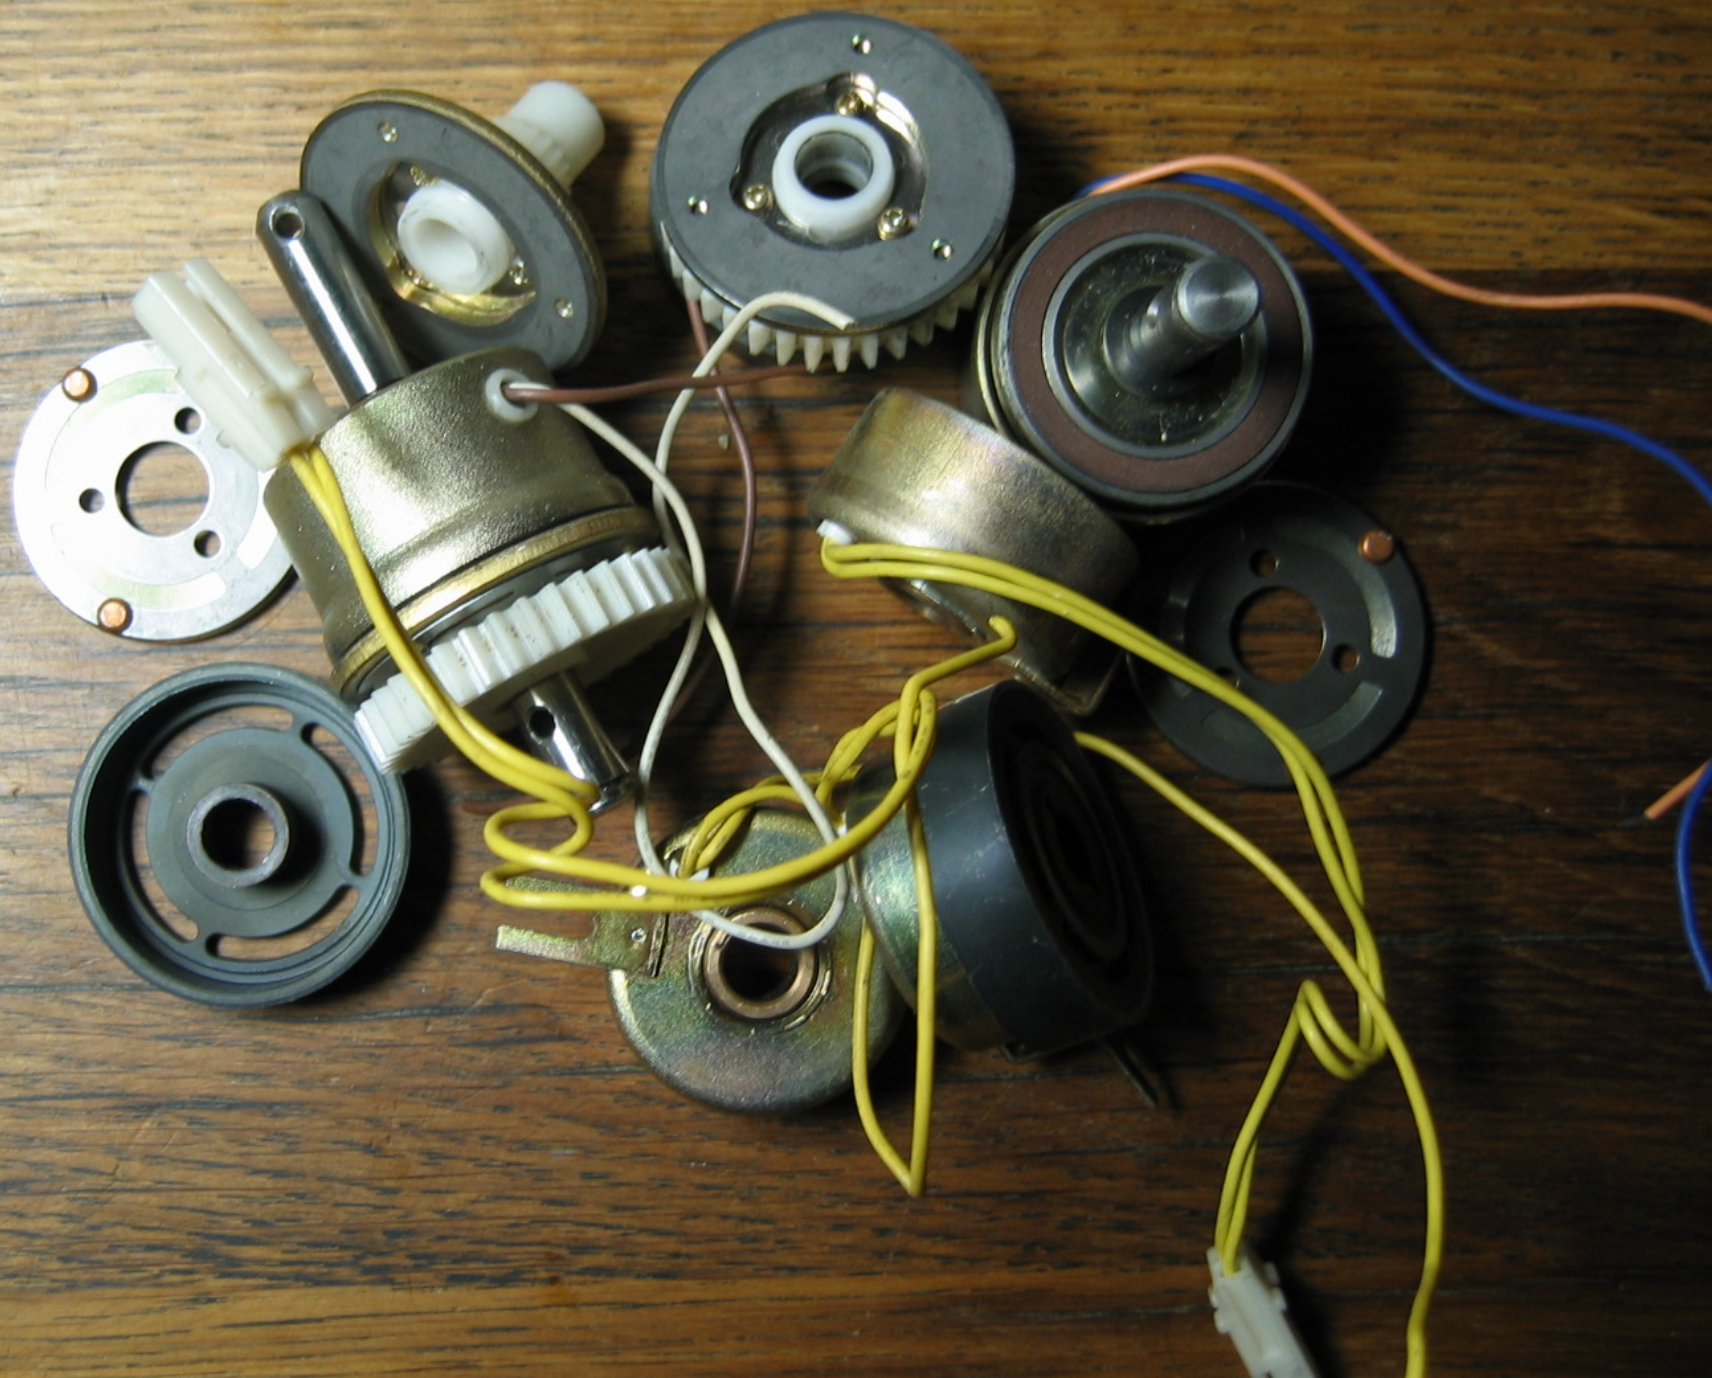

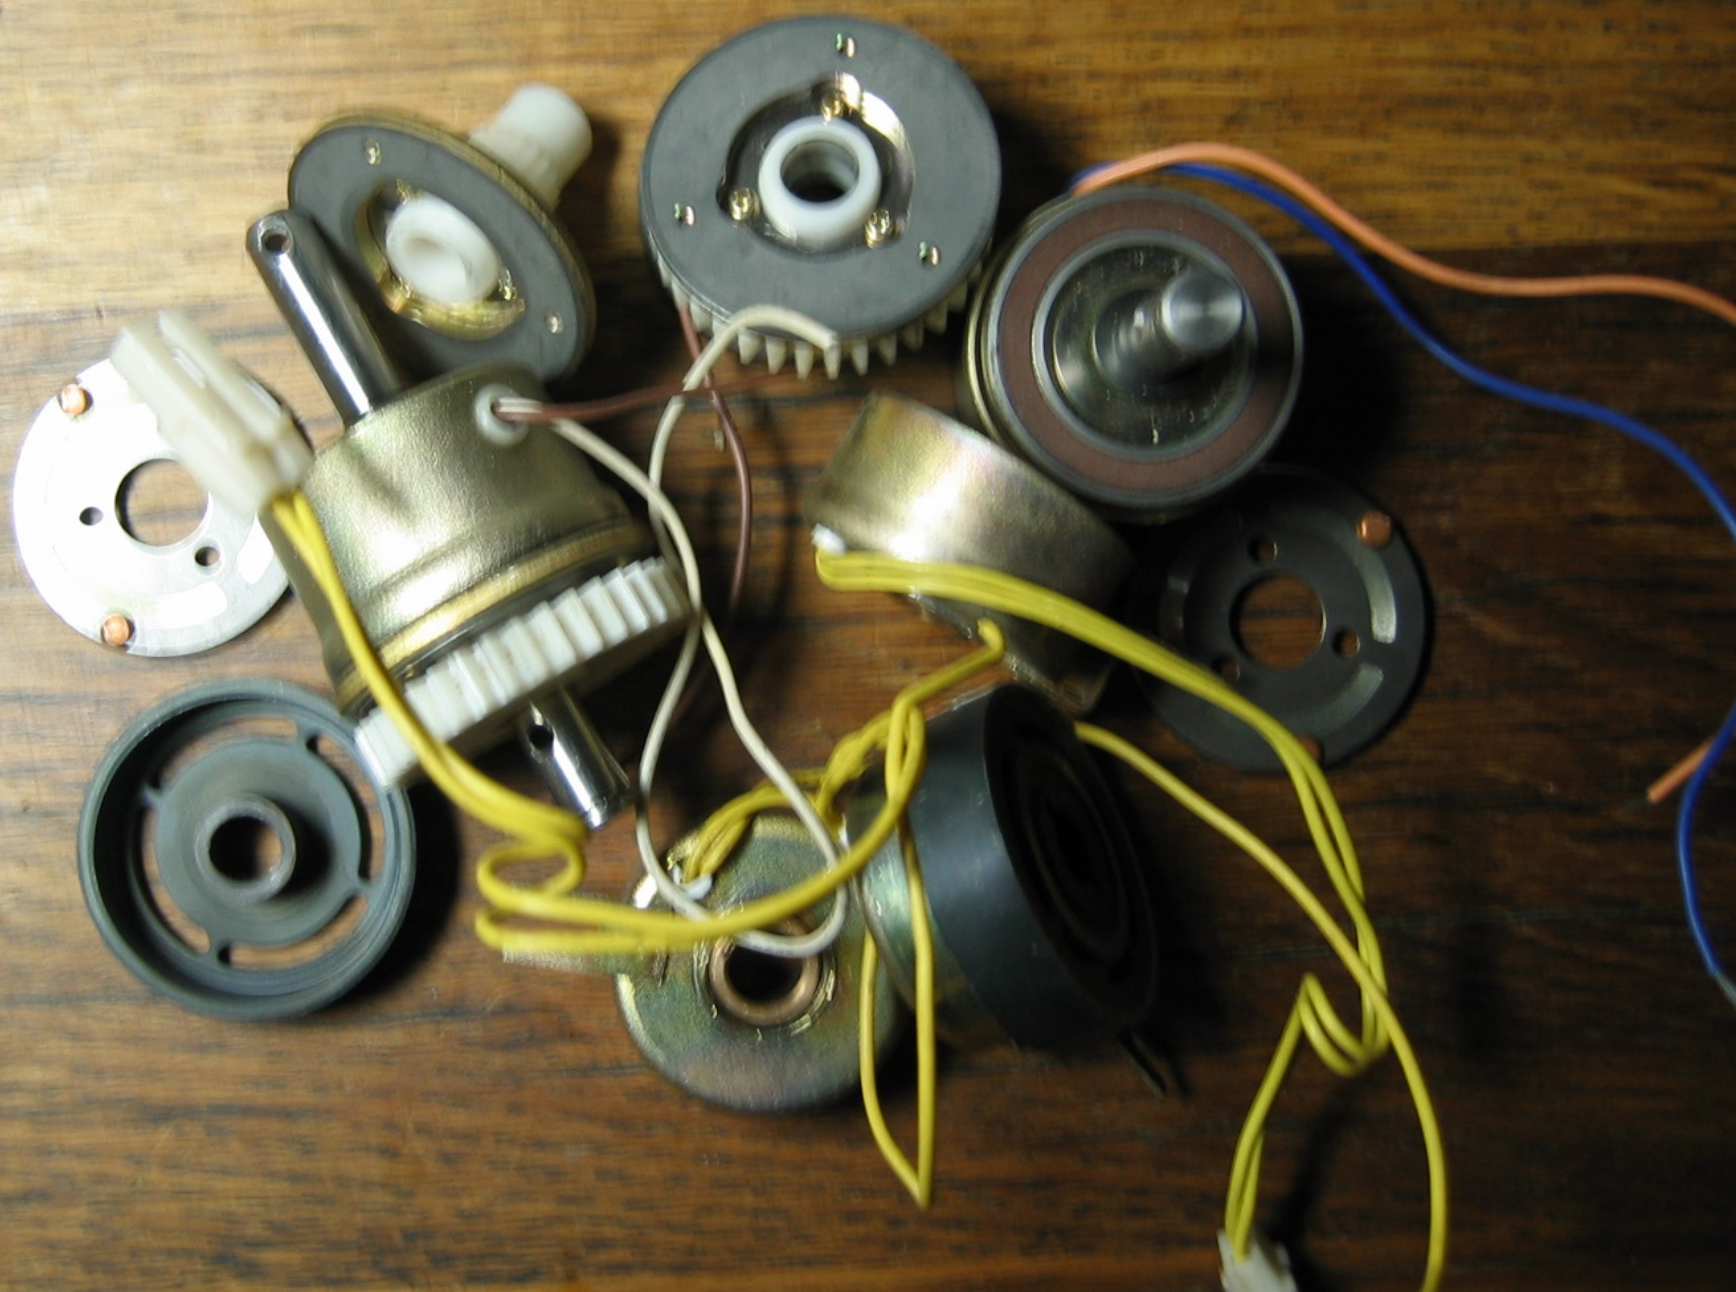









































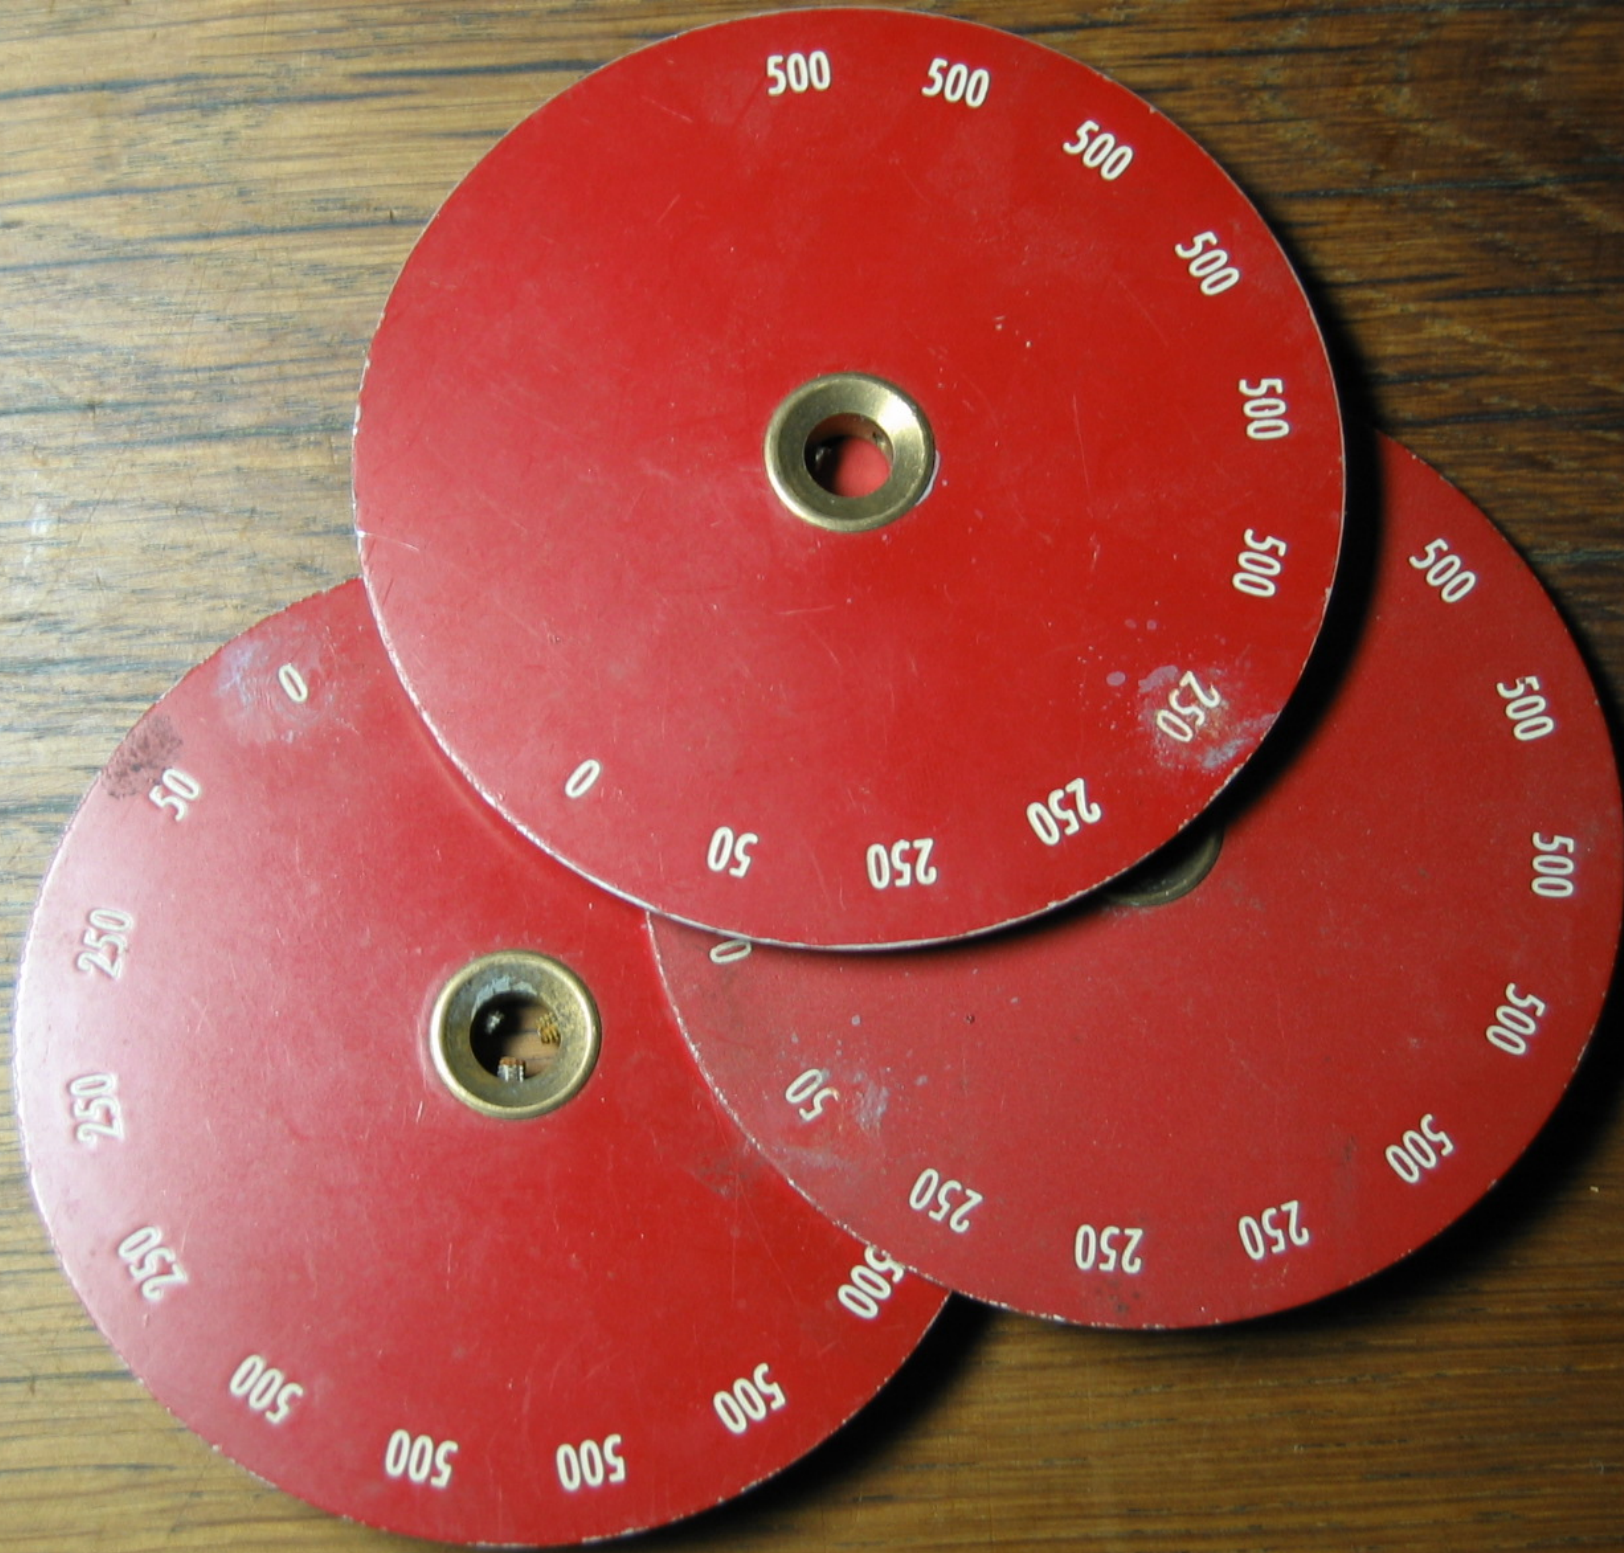

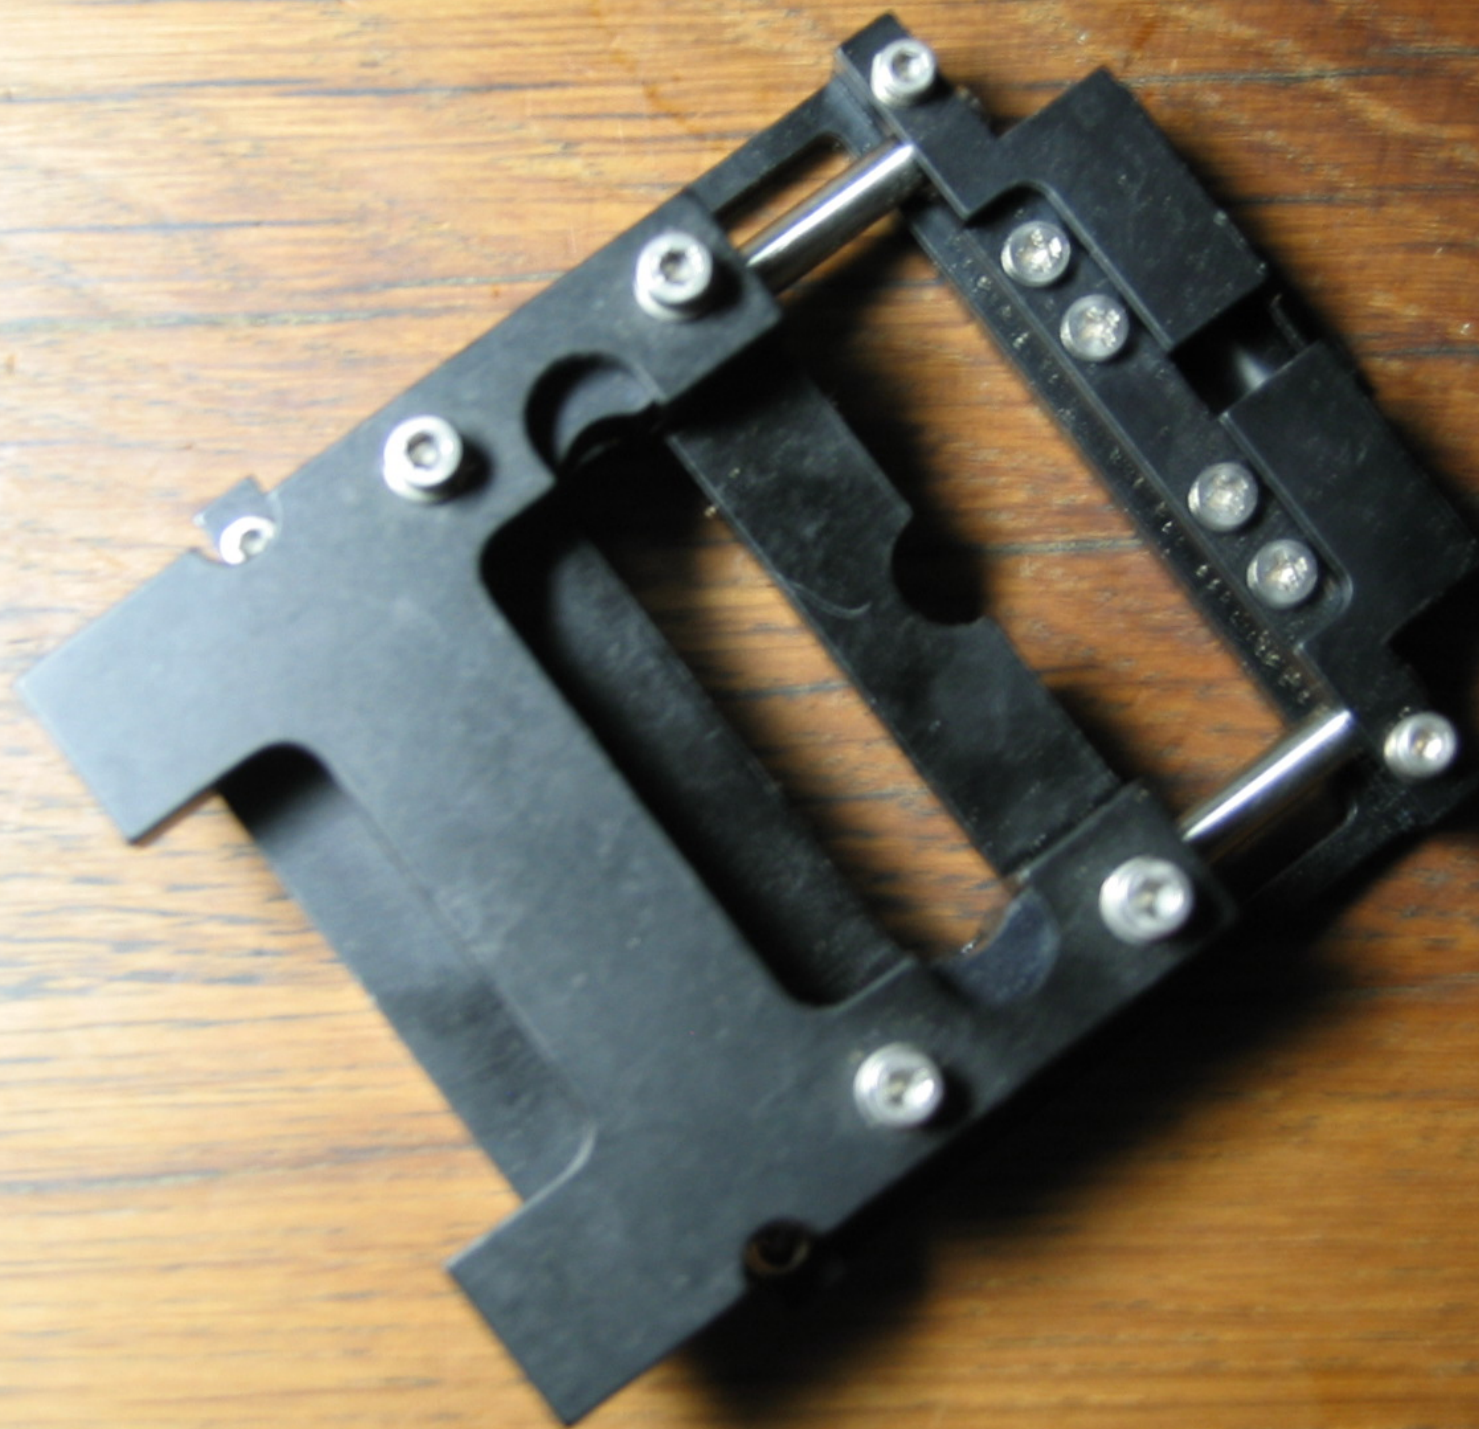














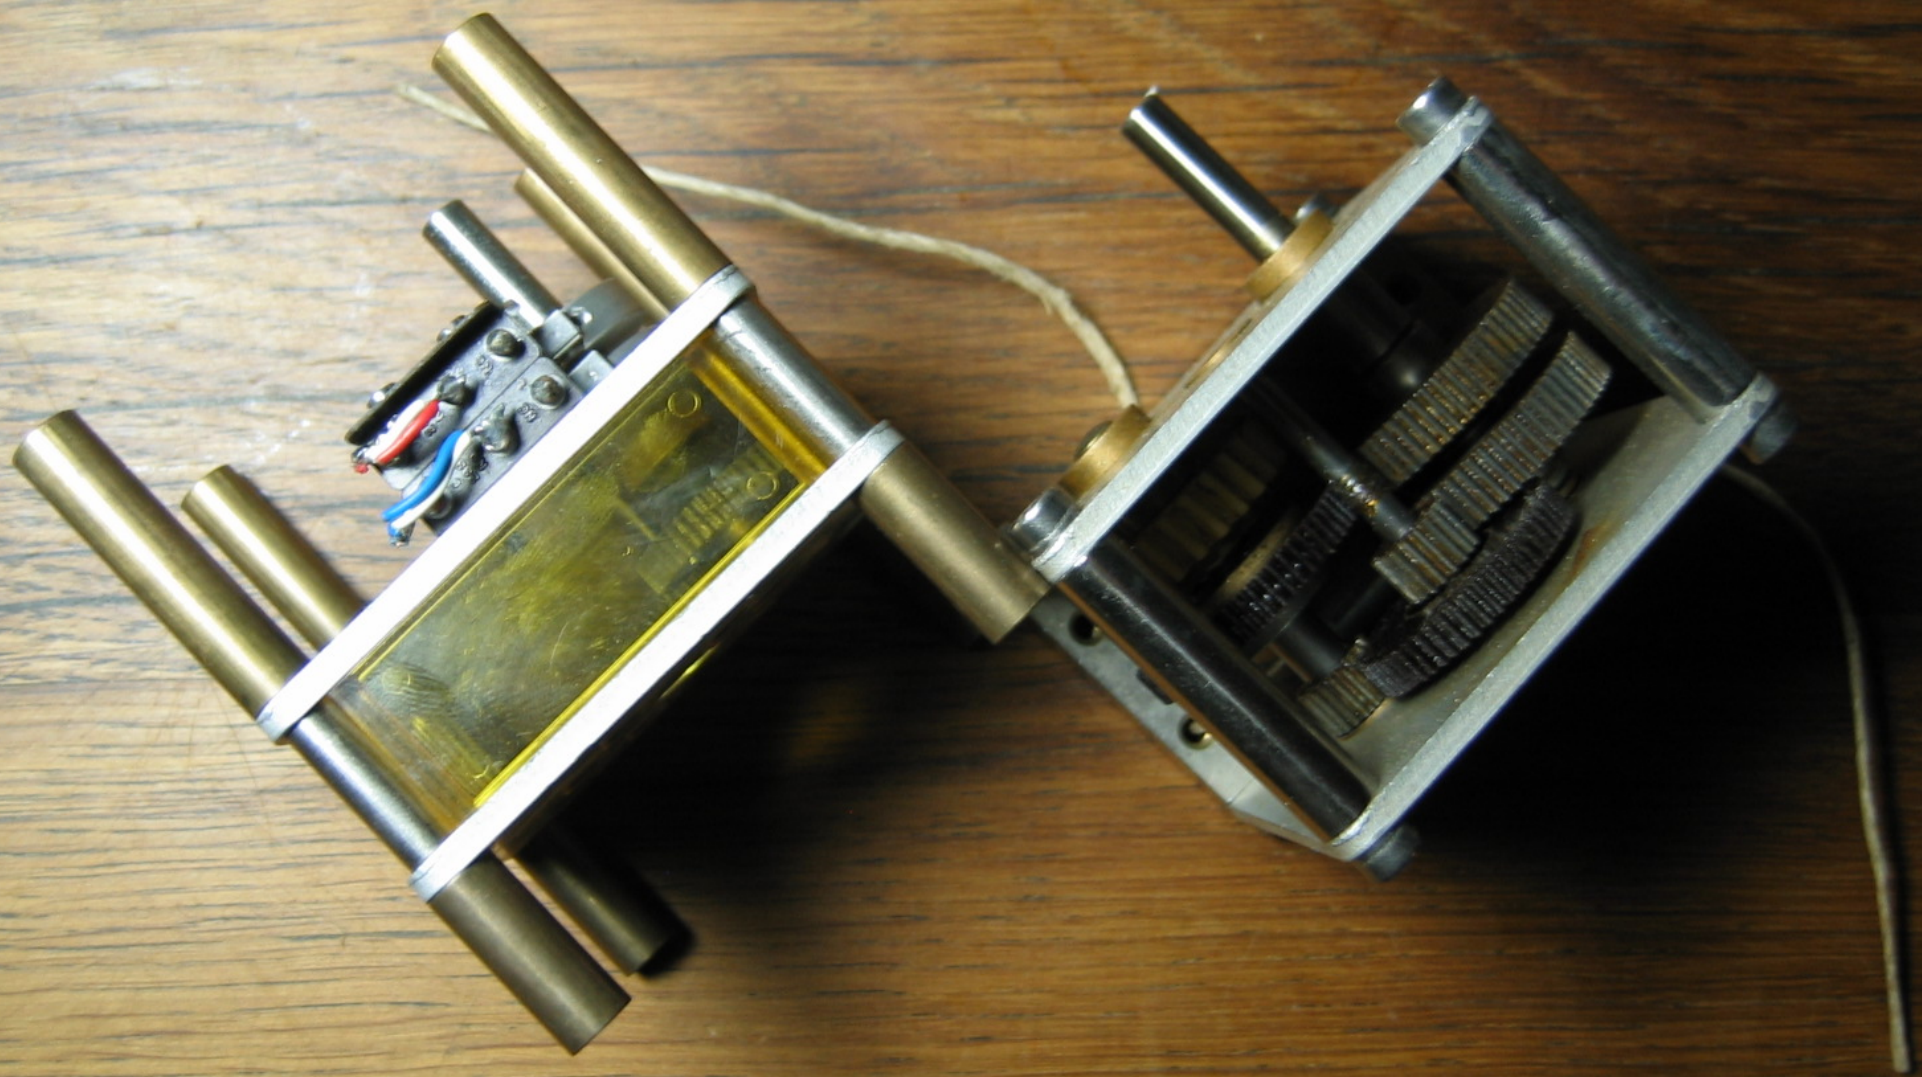

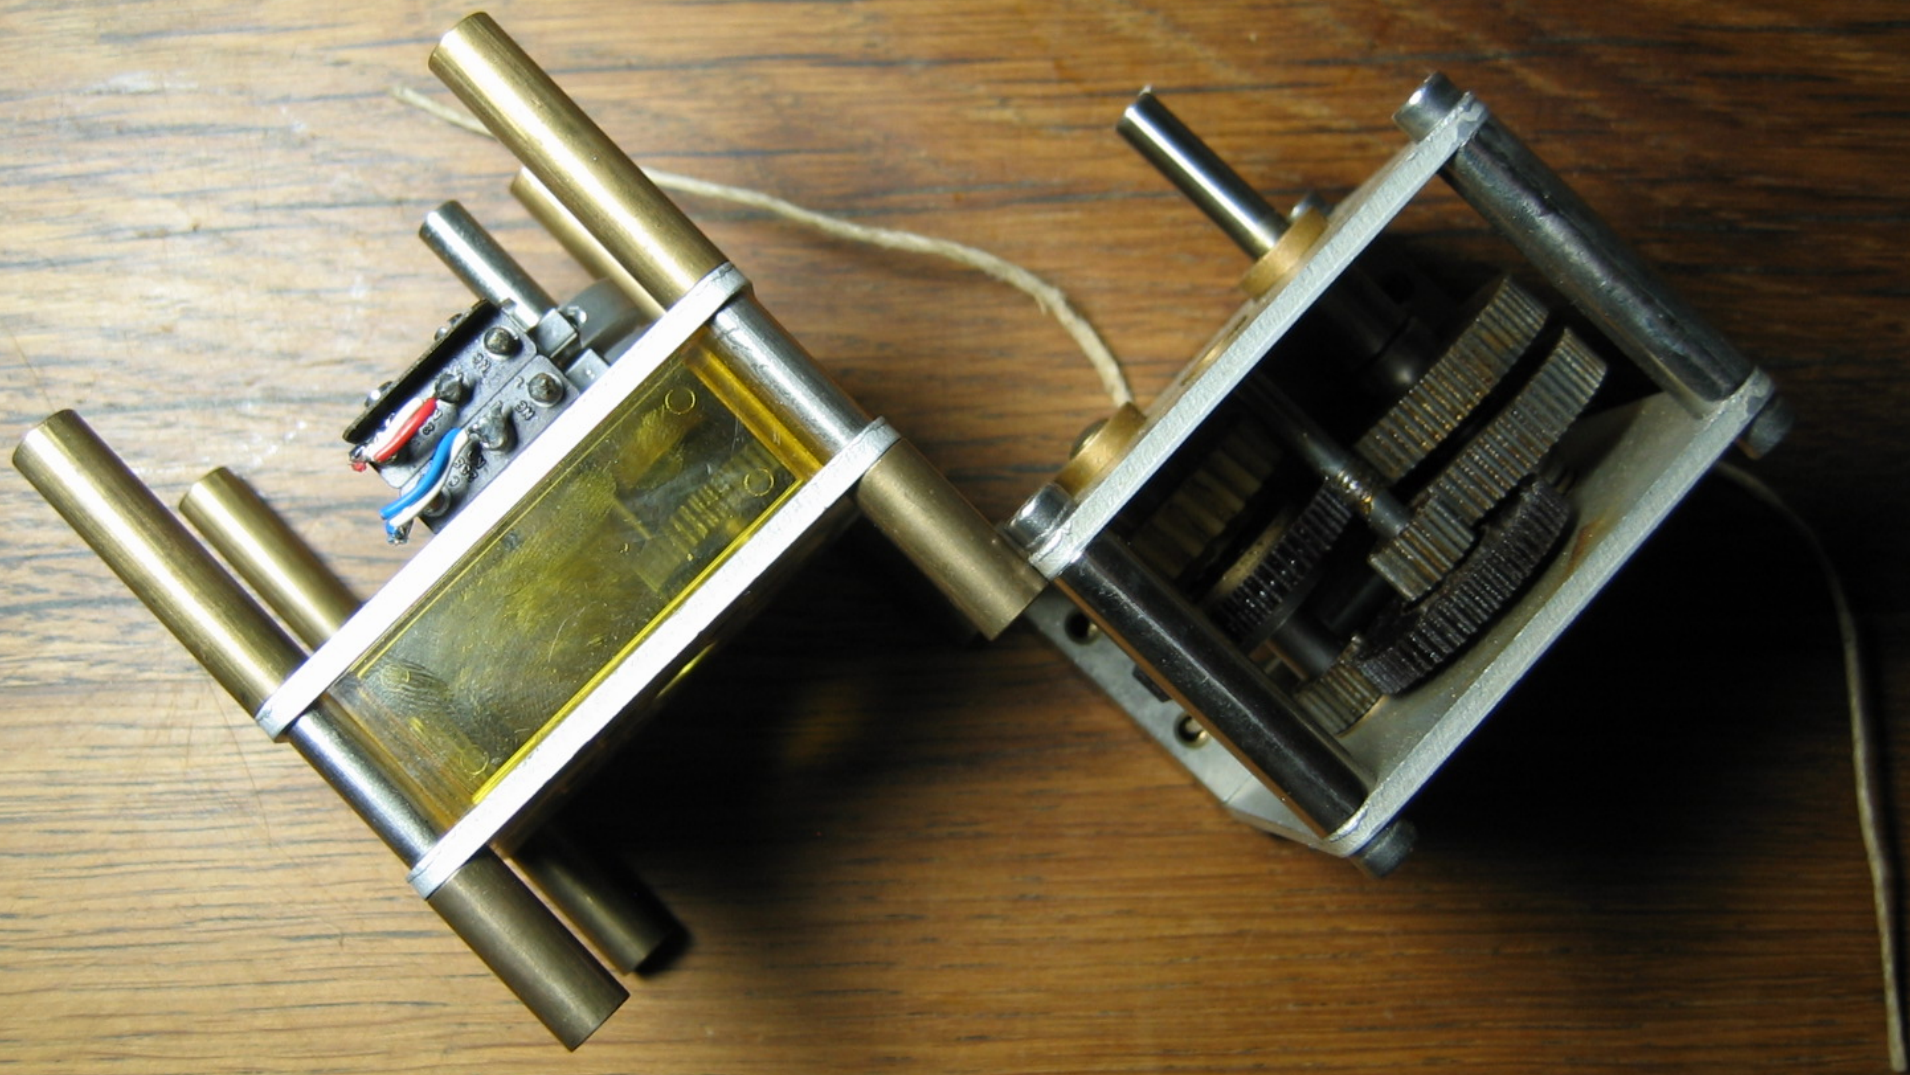

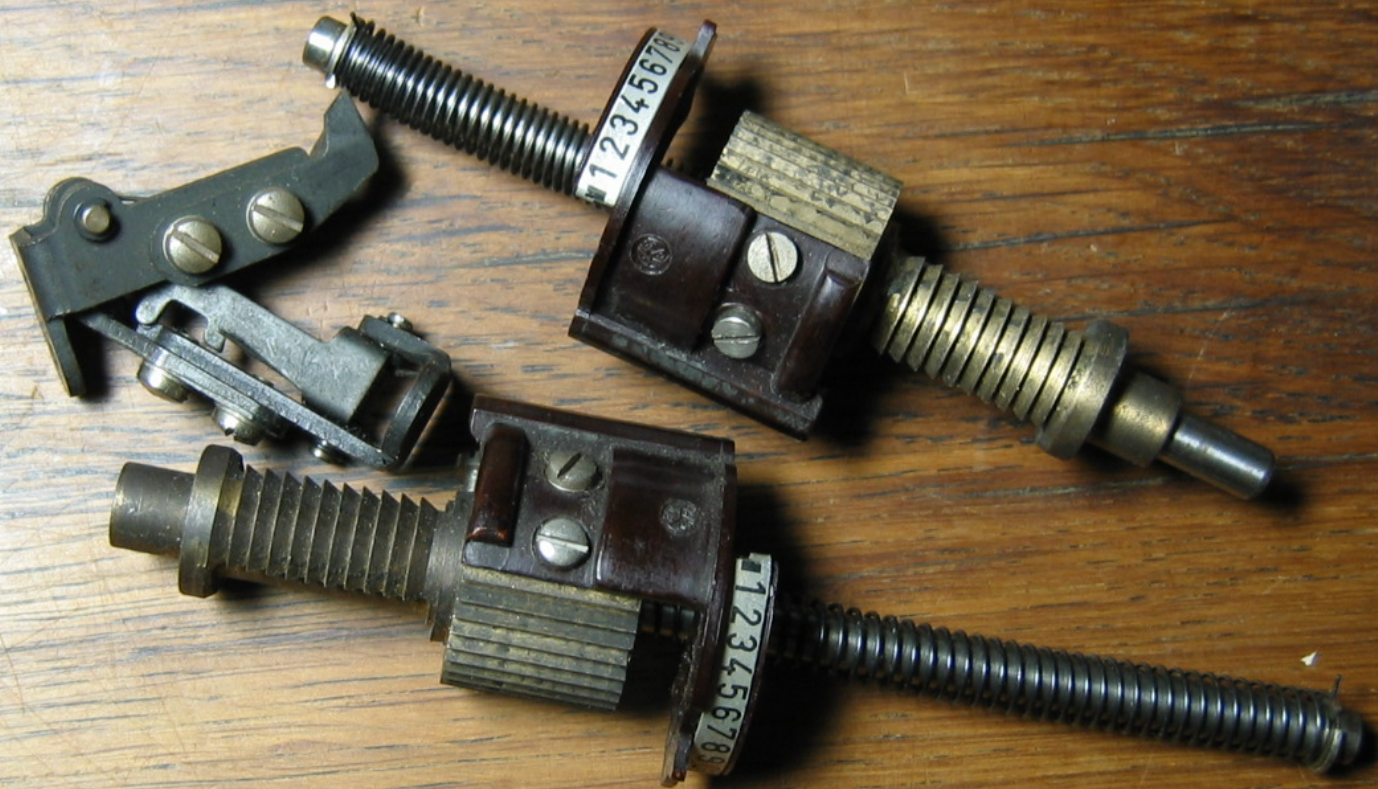











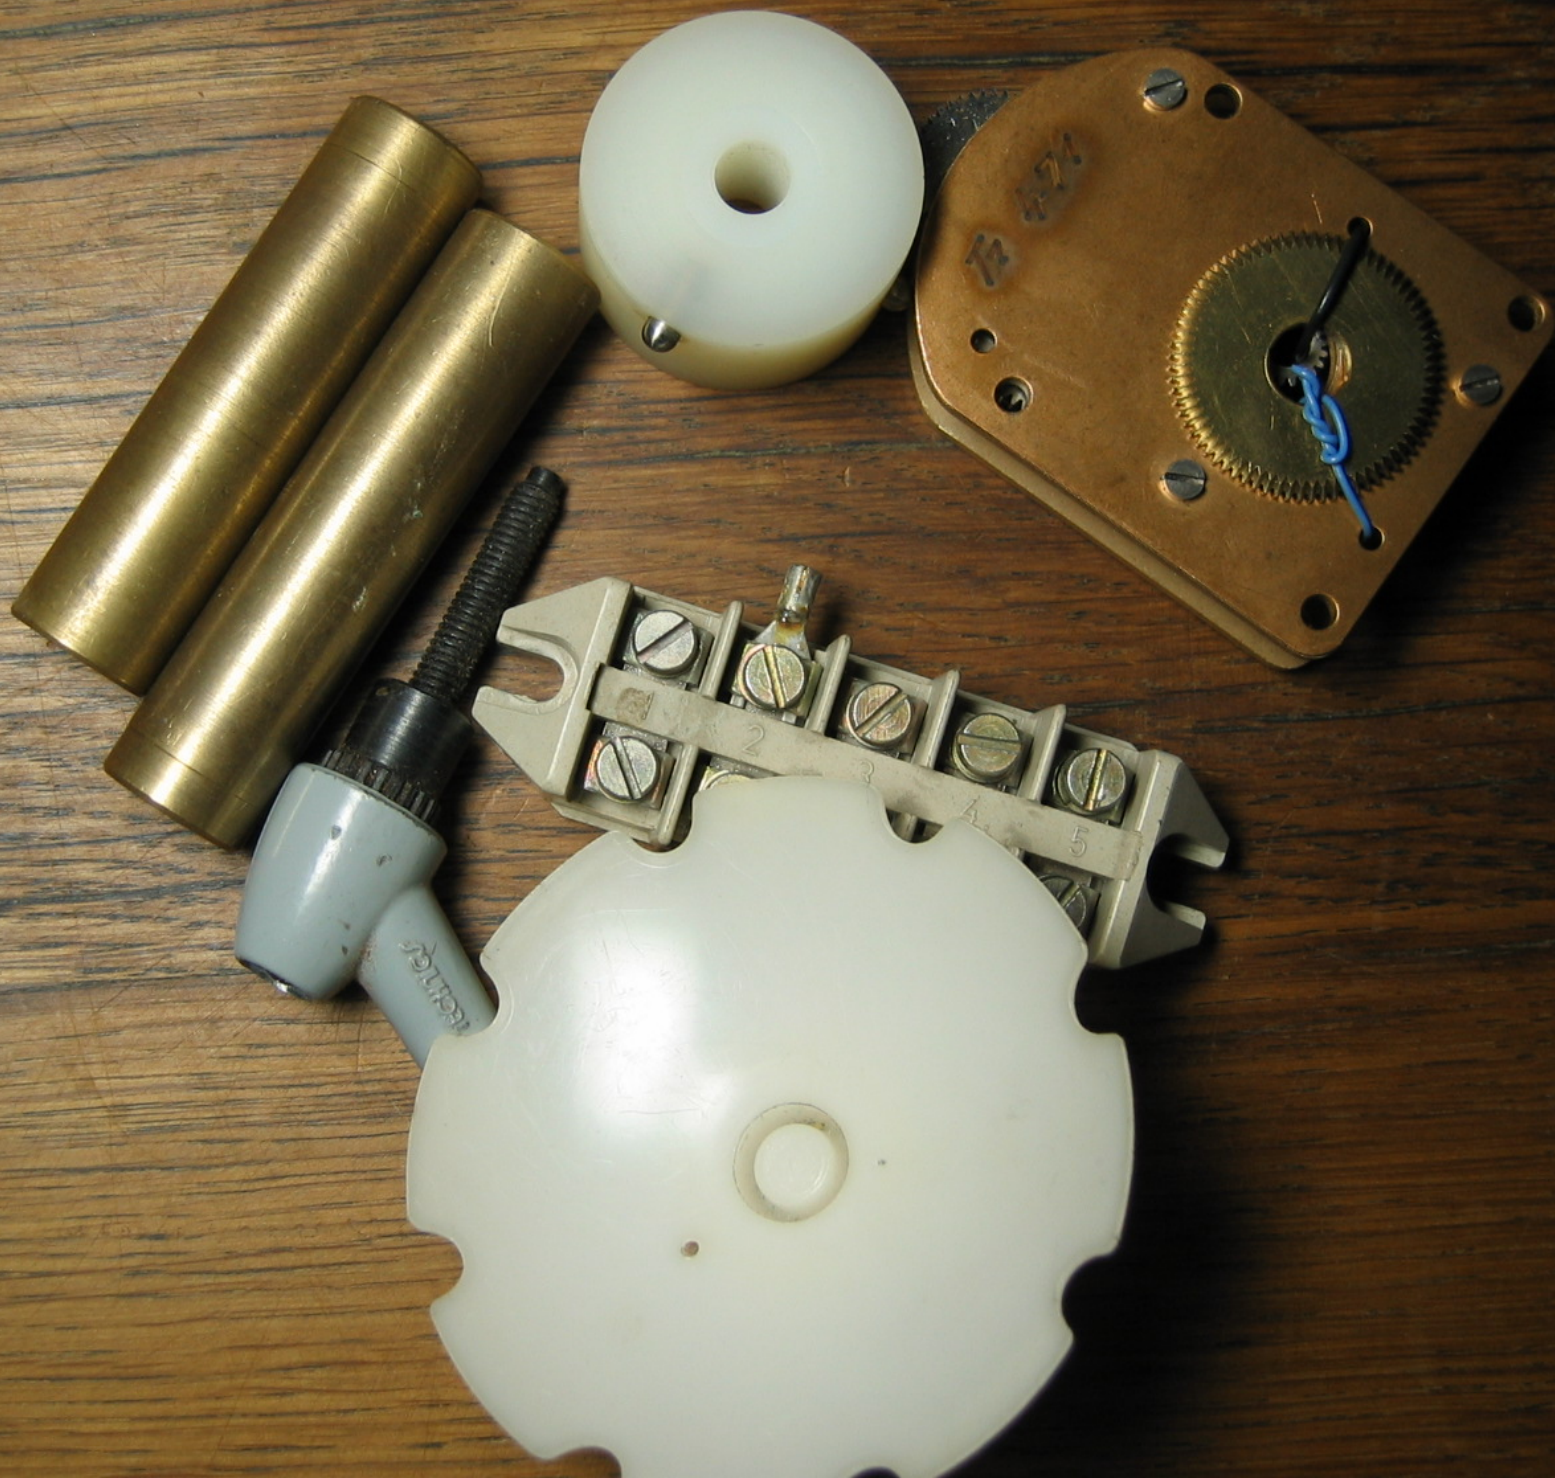

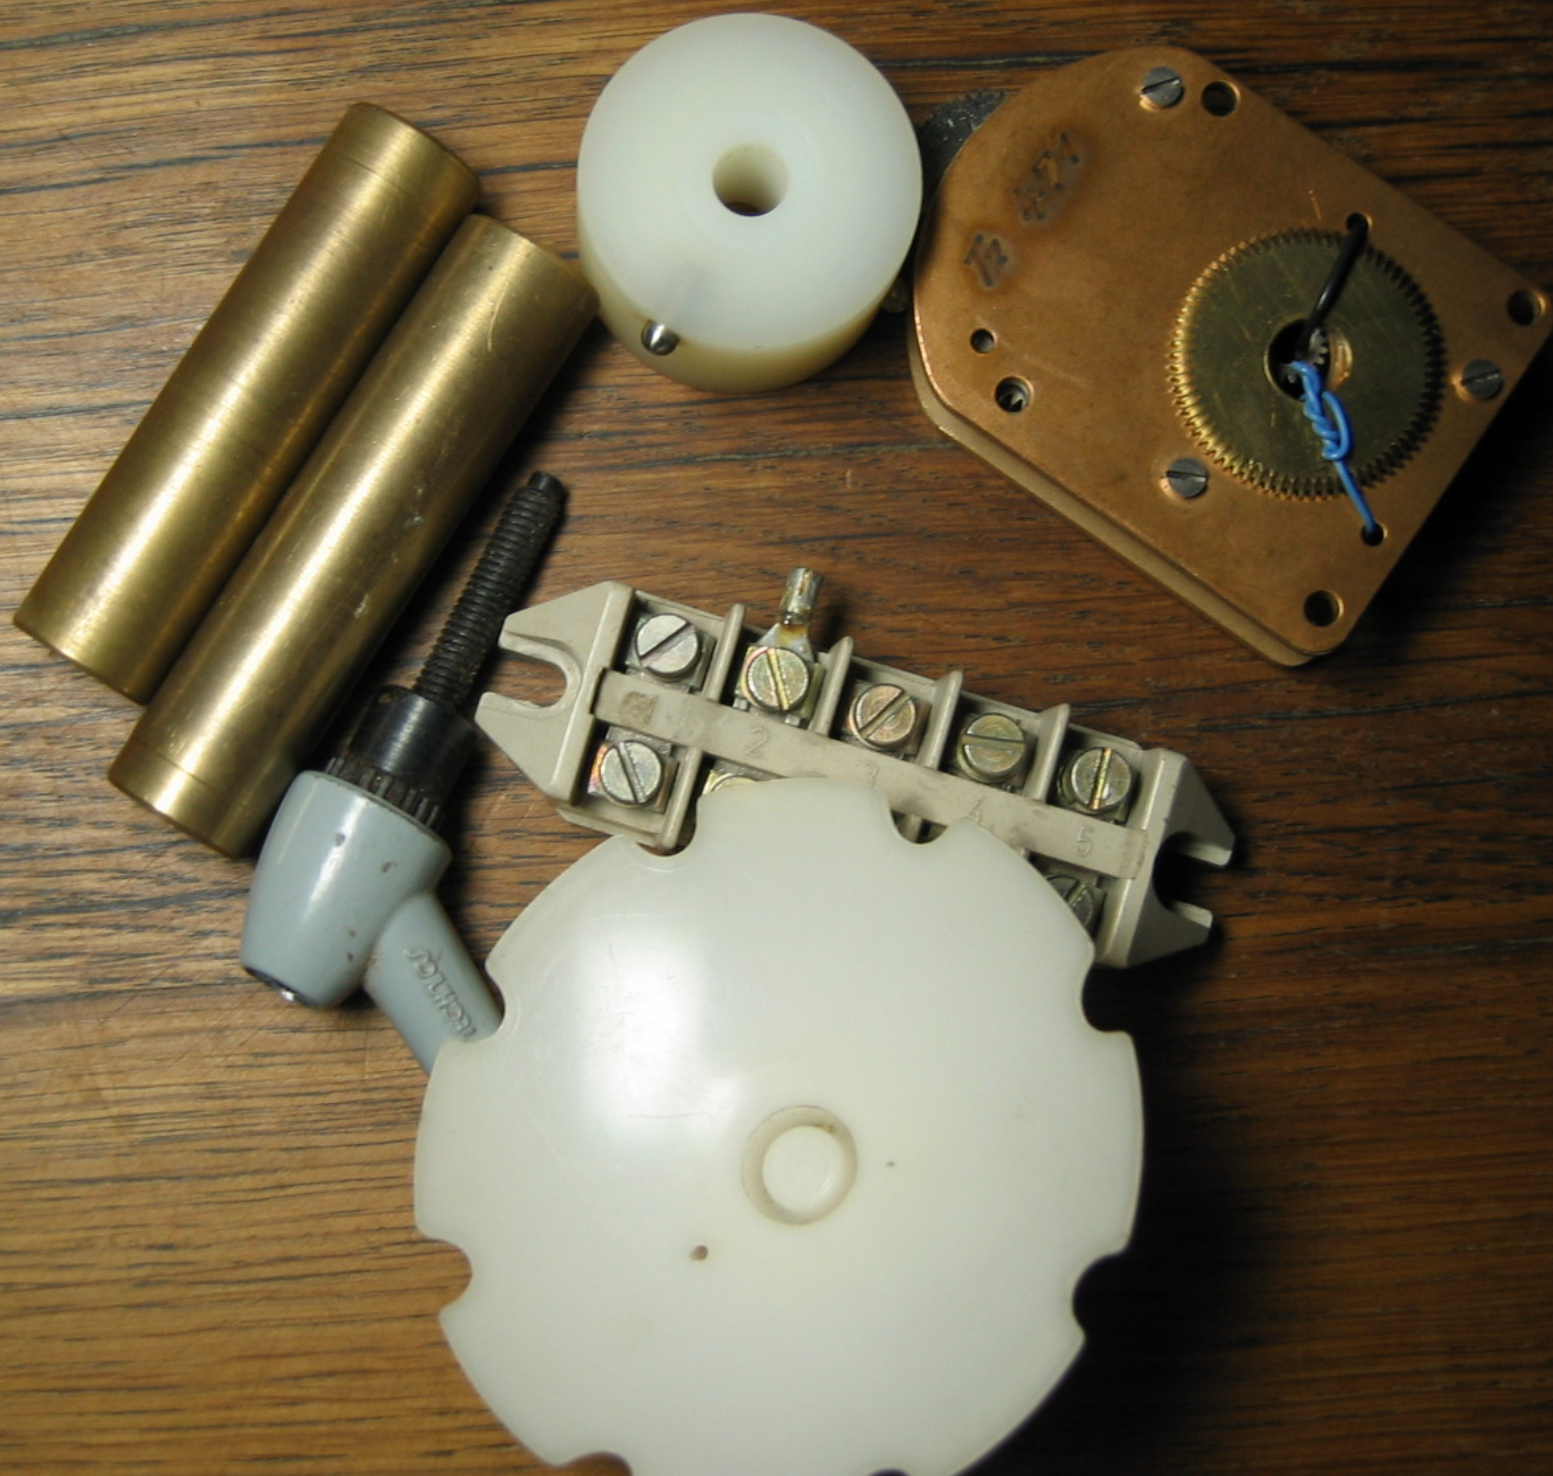










































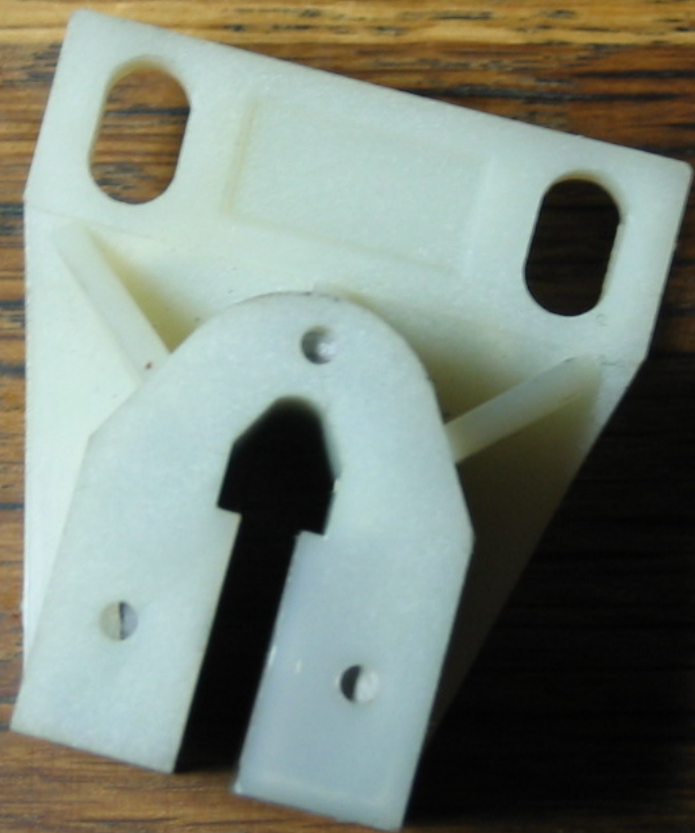





MADE IN JAPAN

IN
-V
24V

cosel


2425


DC-DC CONVERTER

OUT
+V
5V
1A





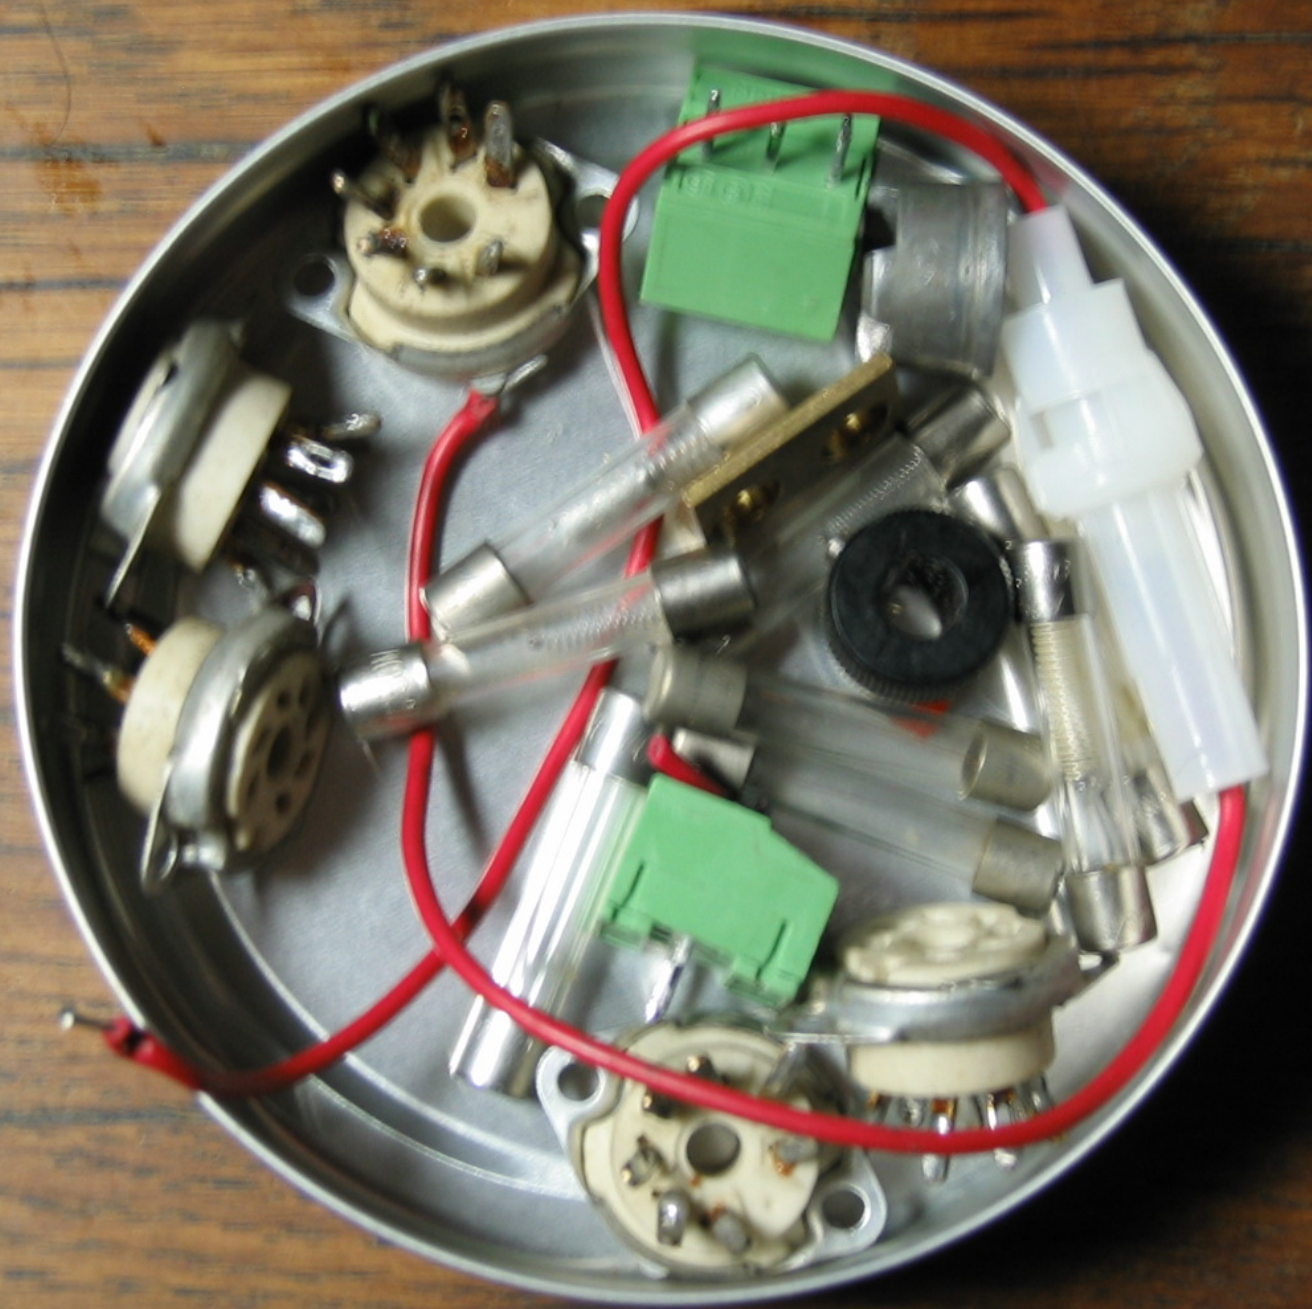

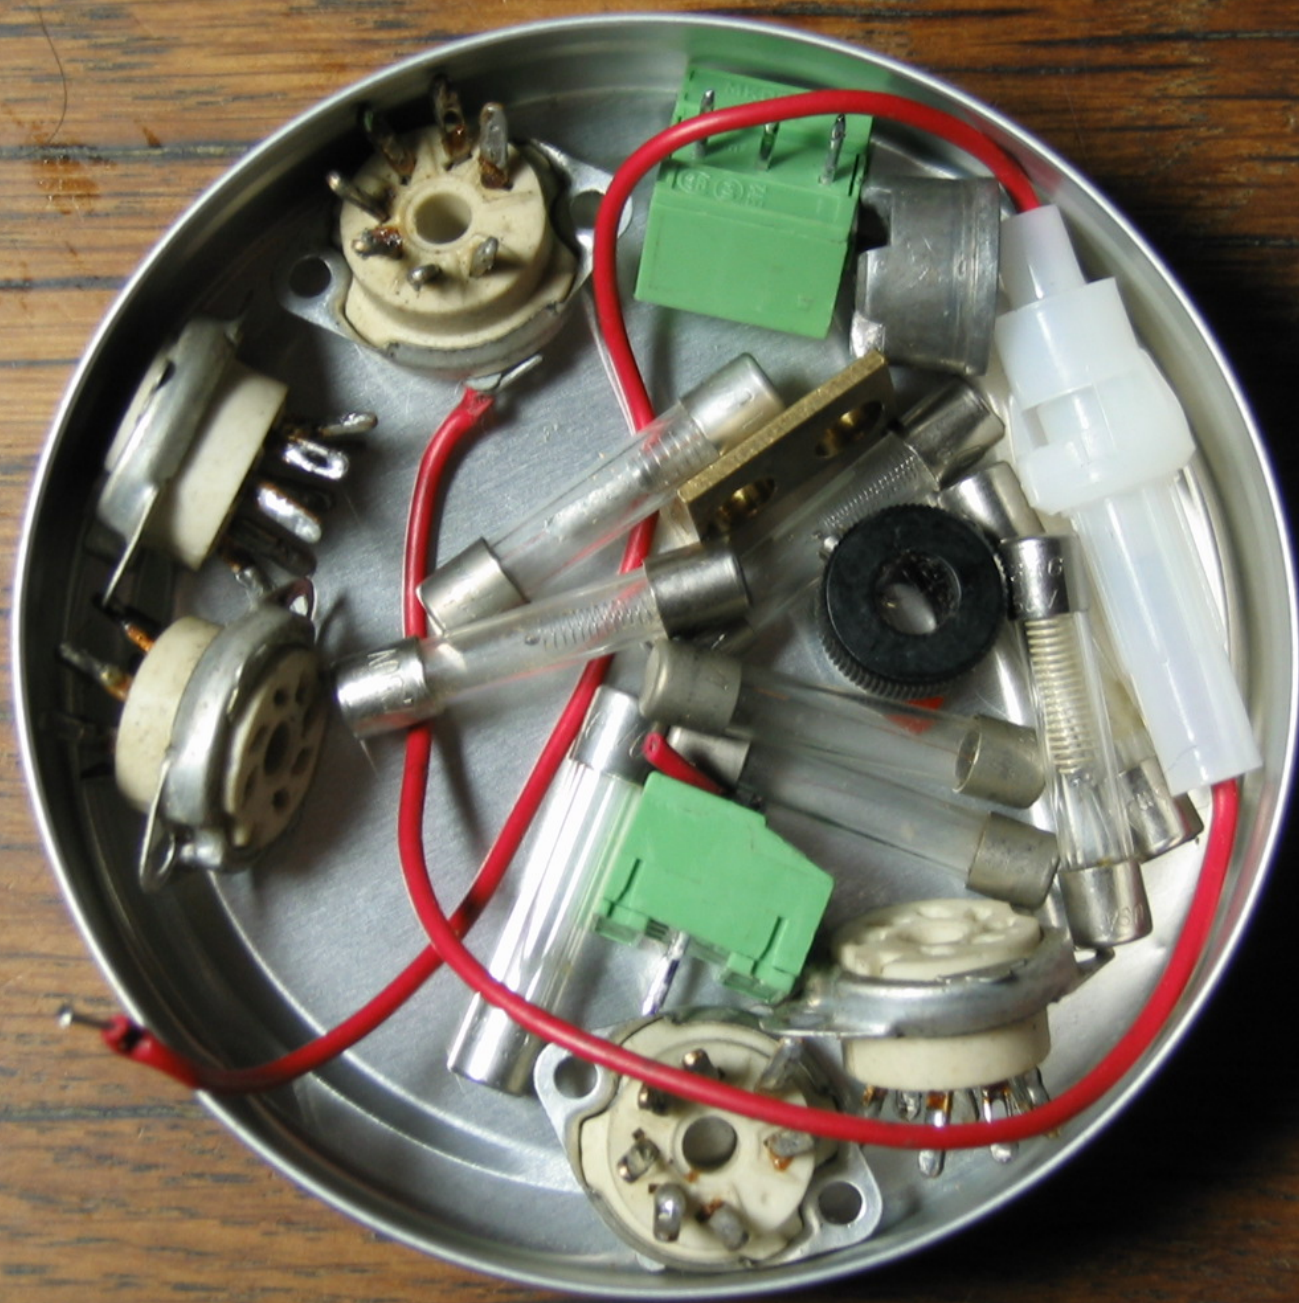






















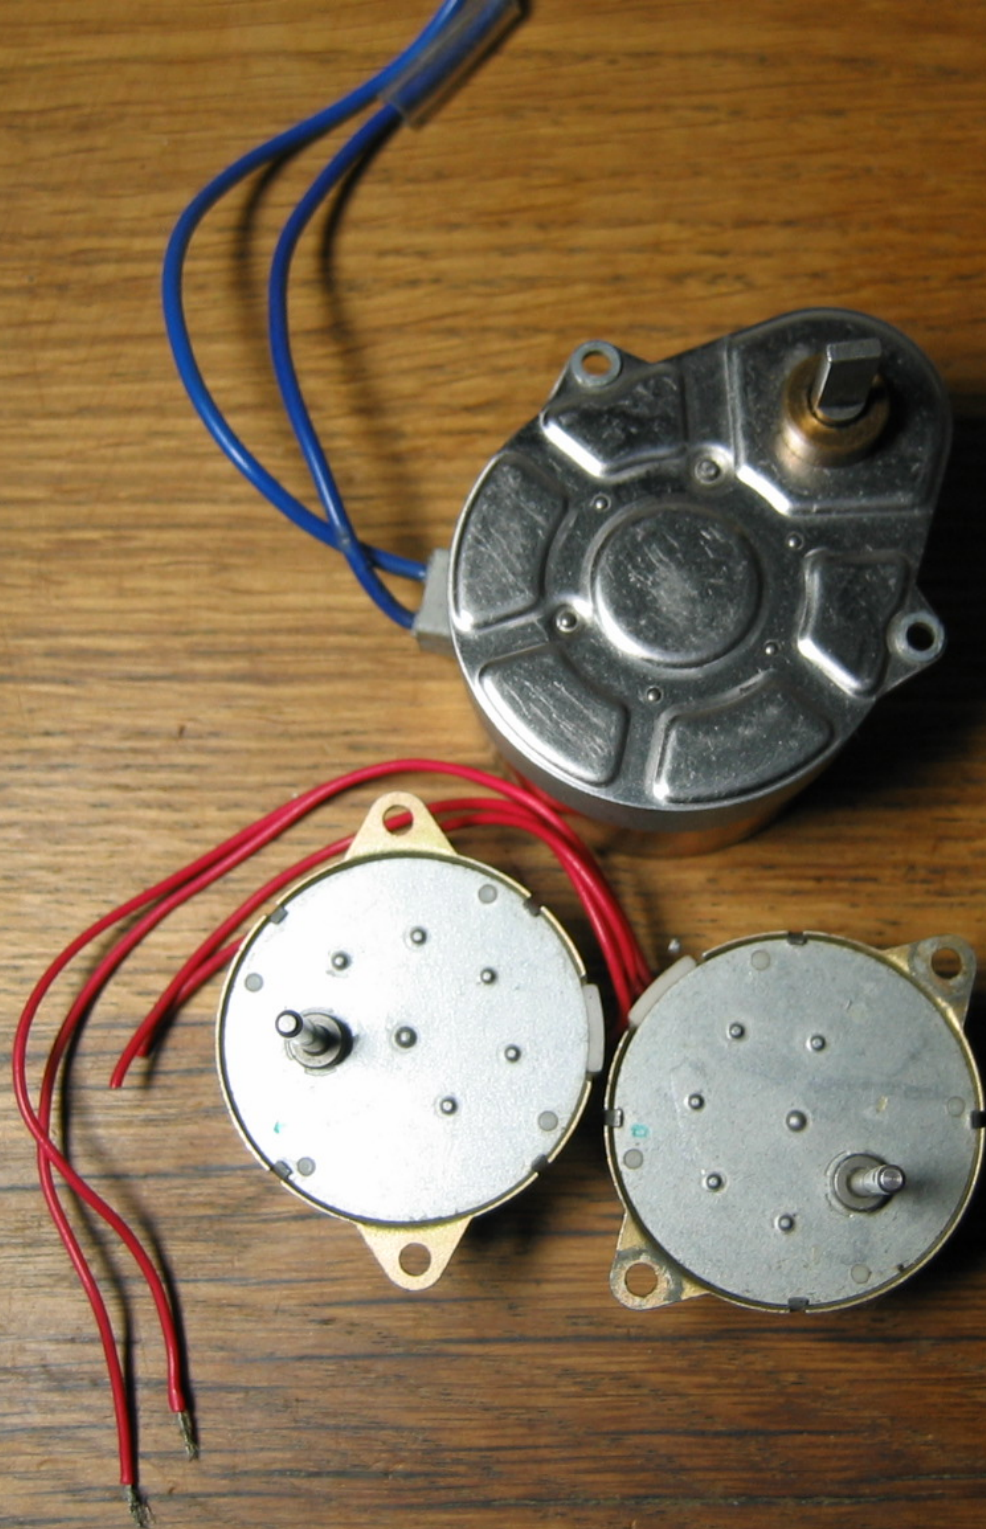

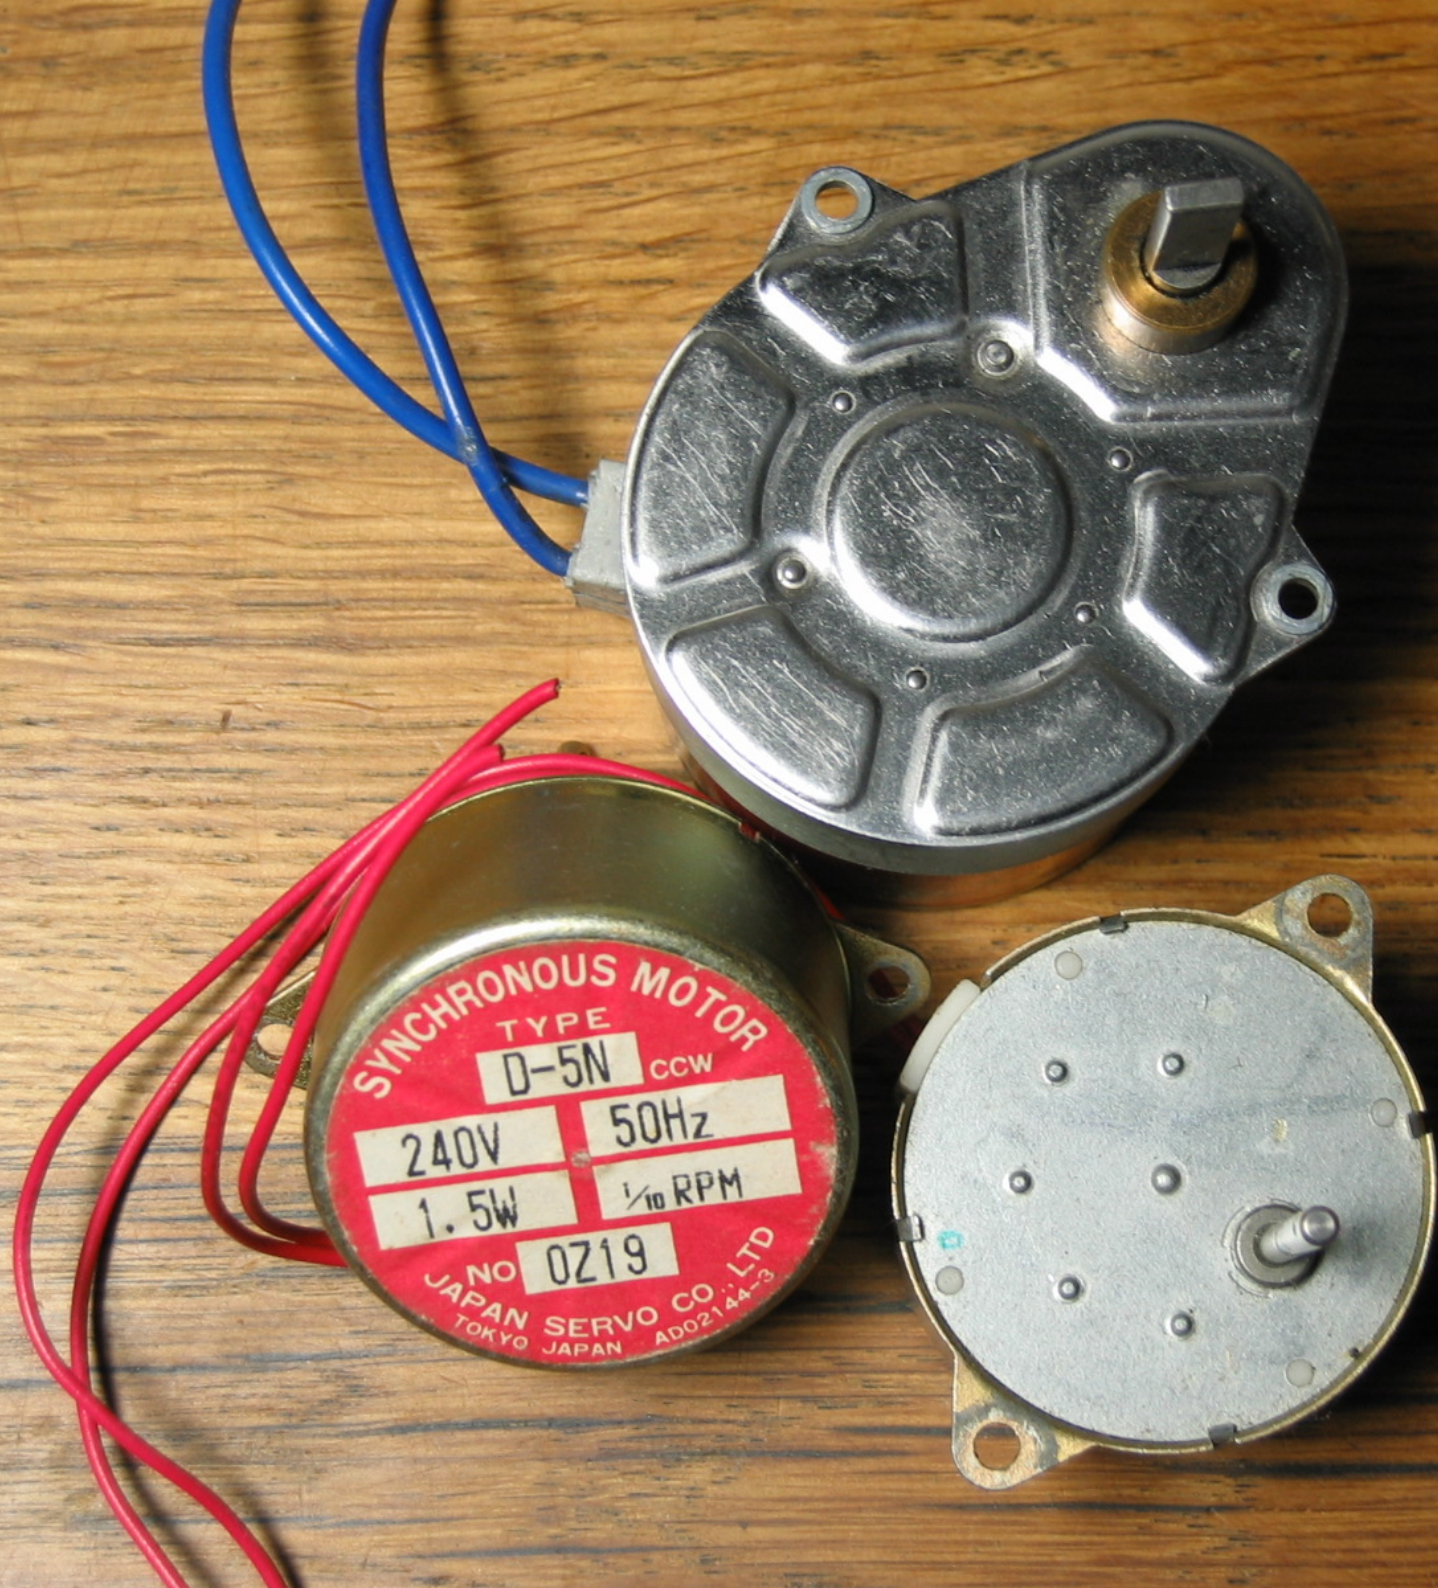

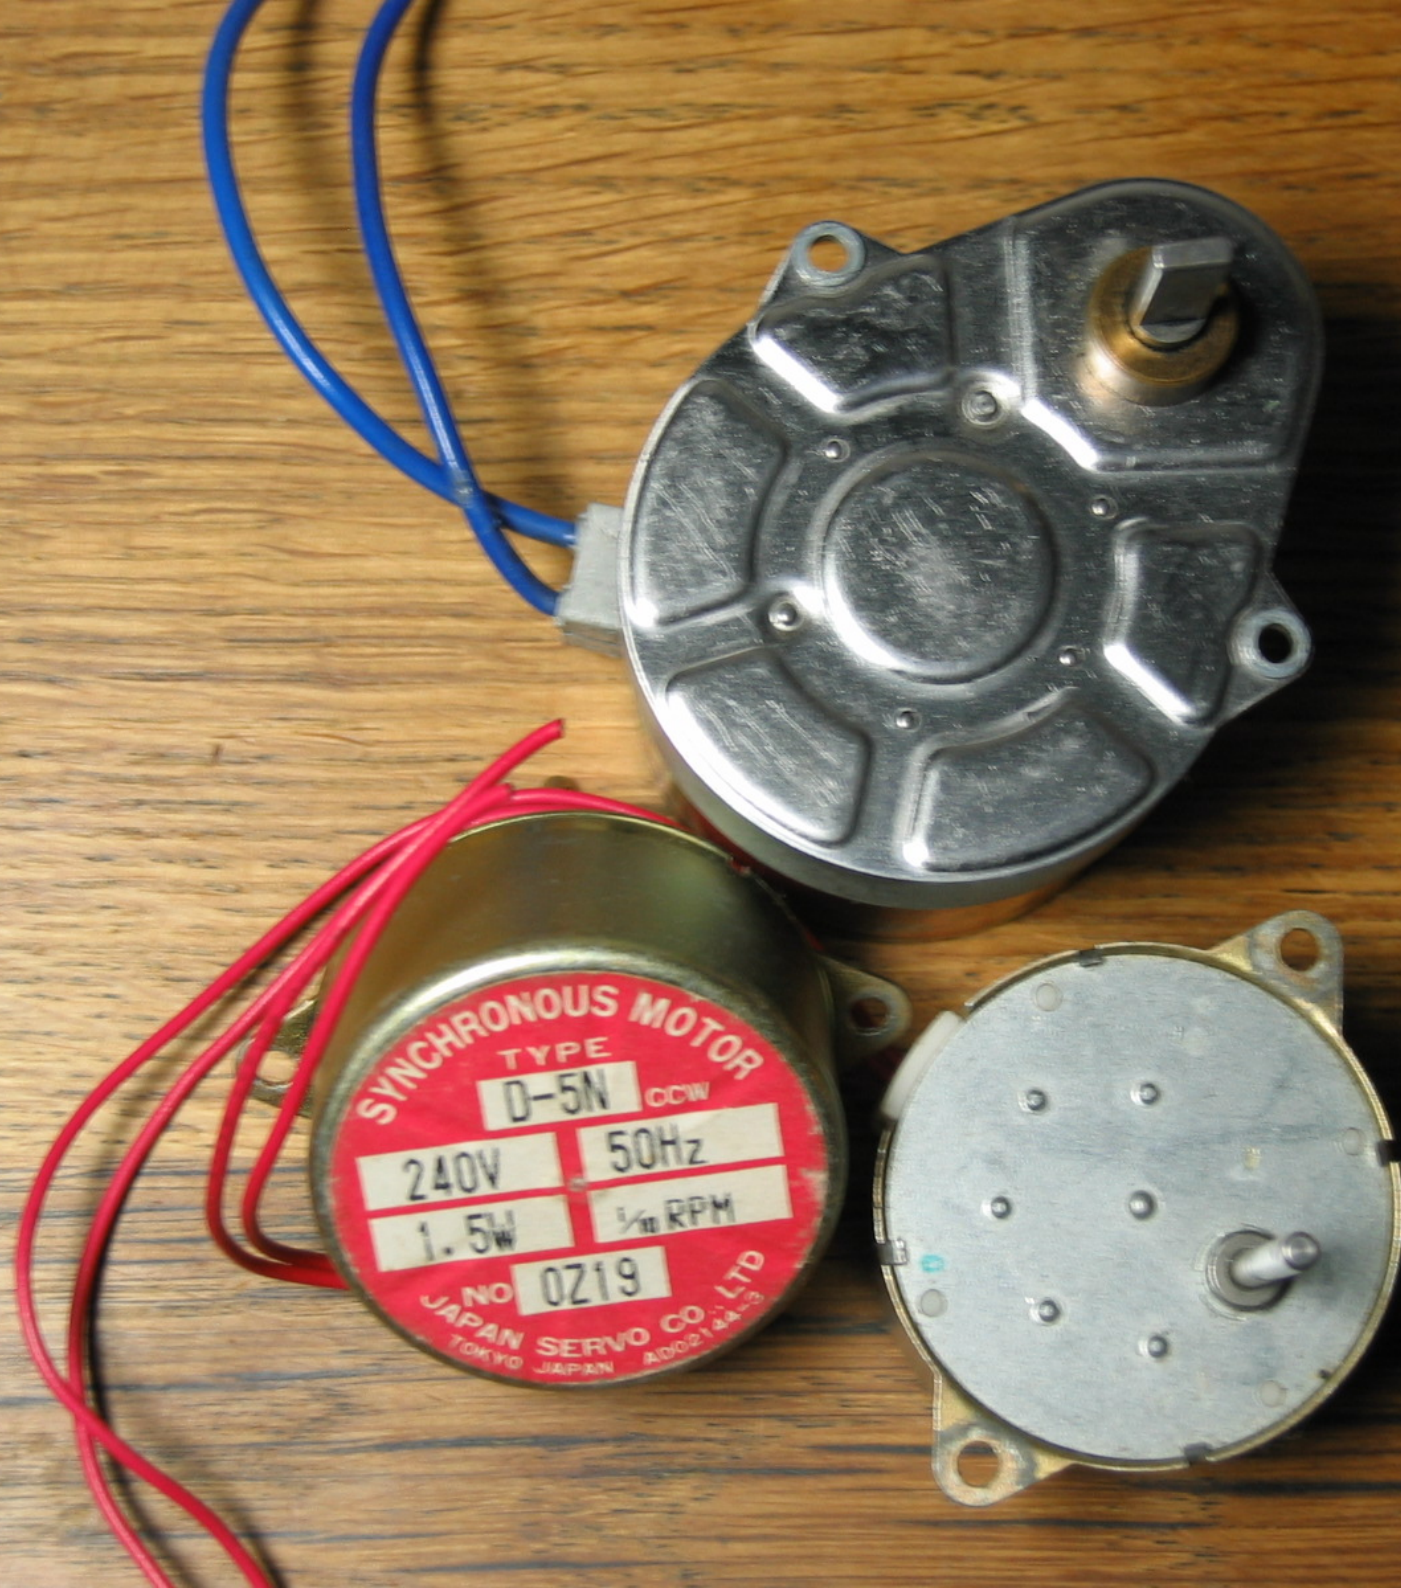

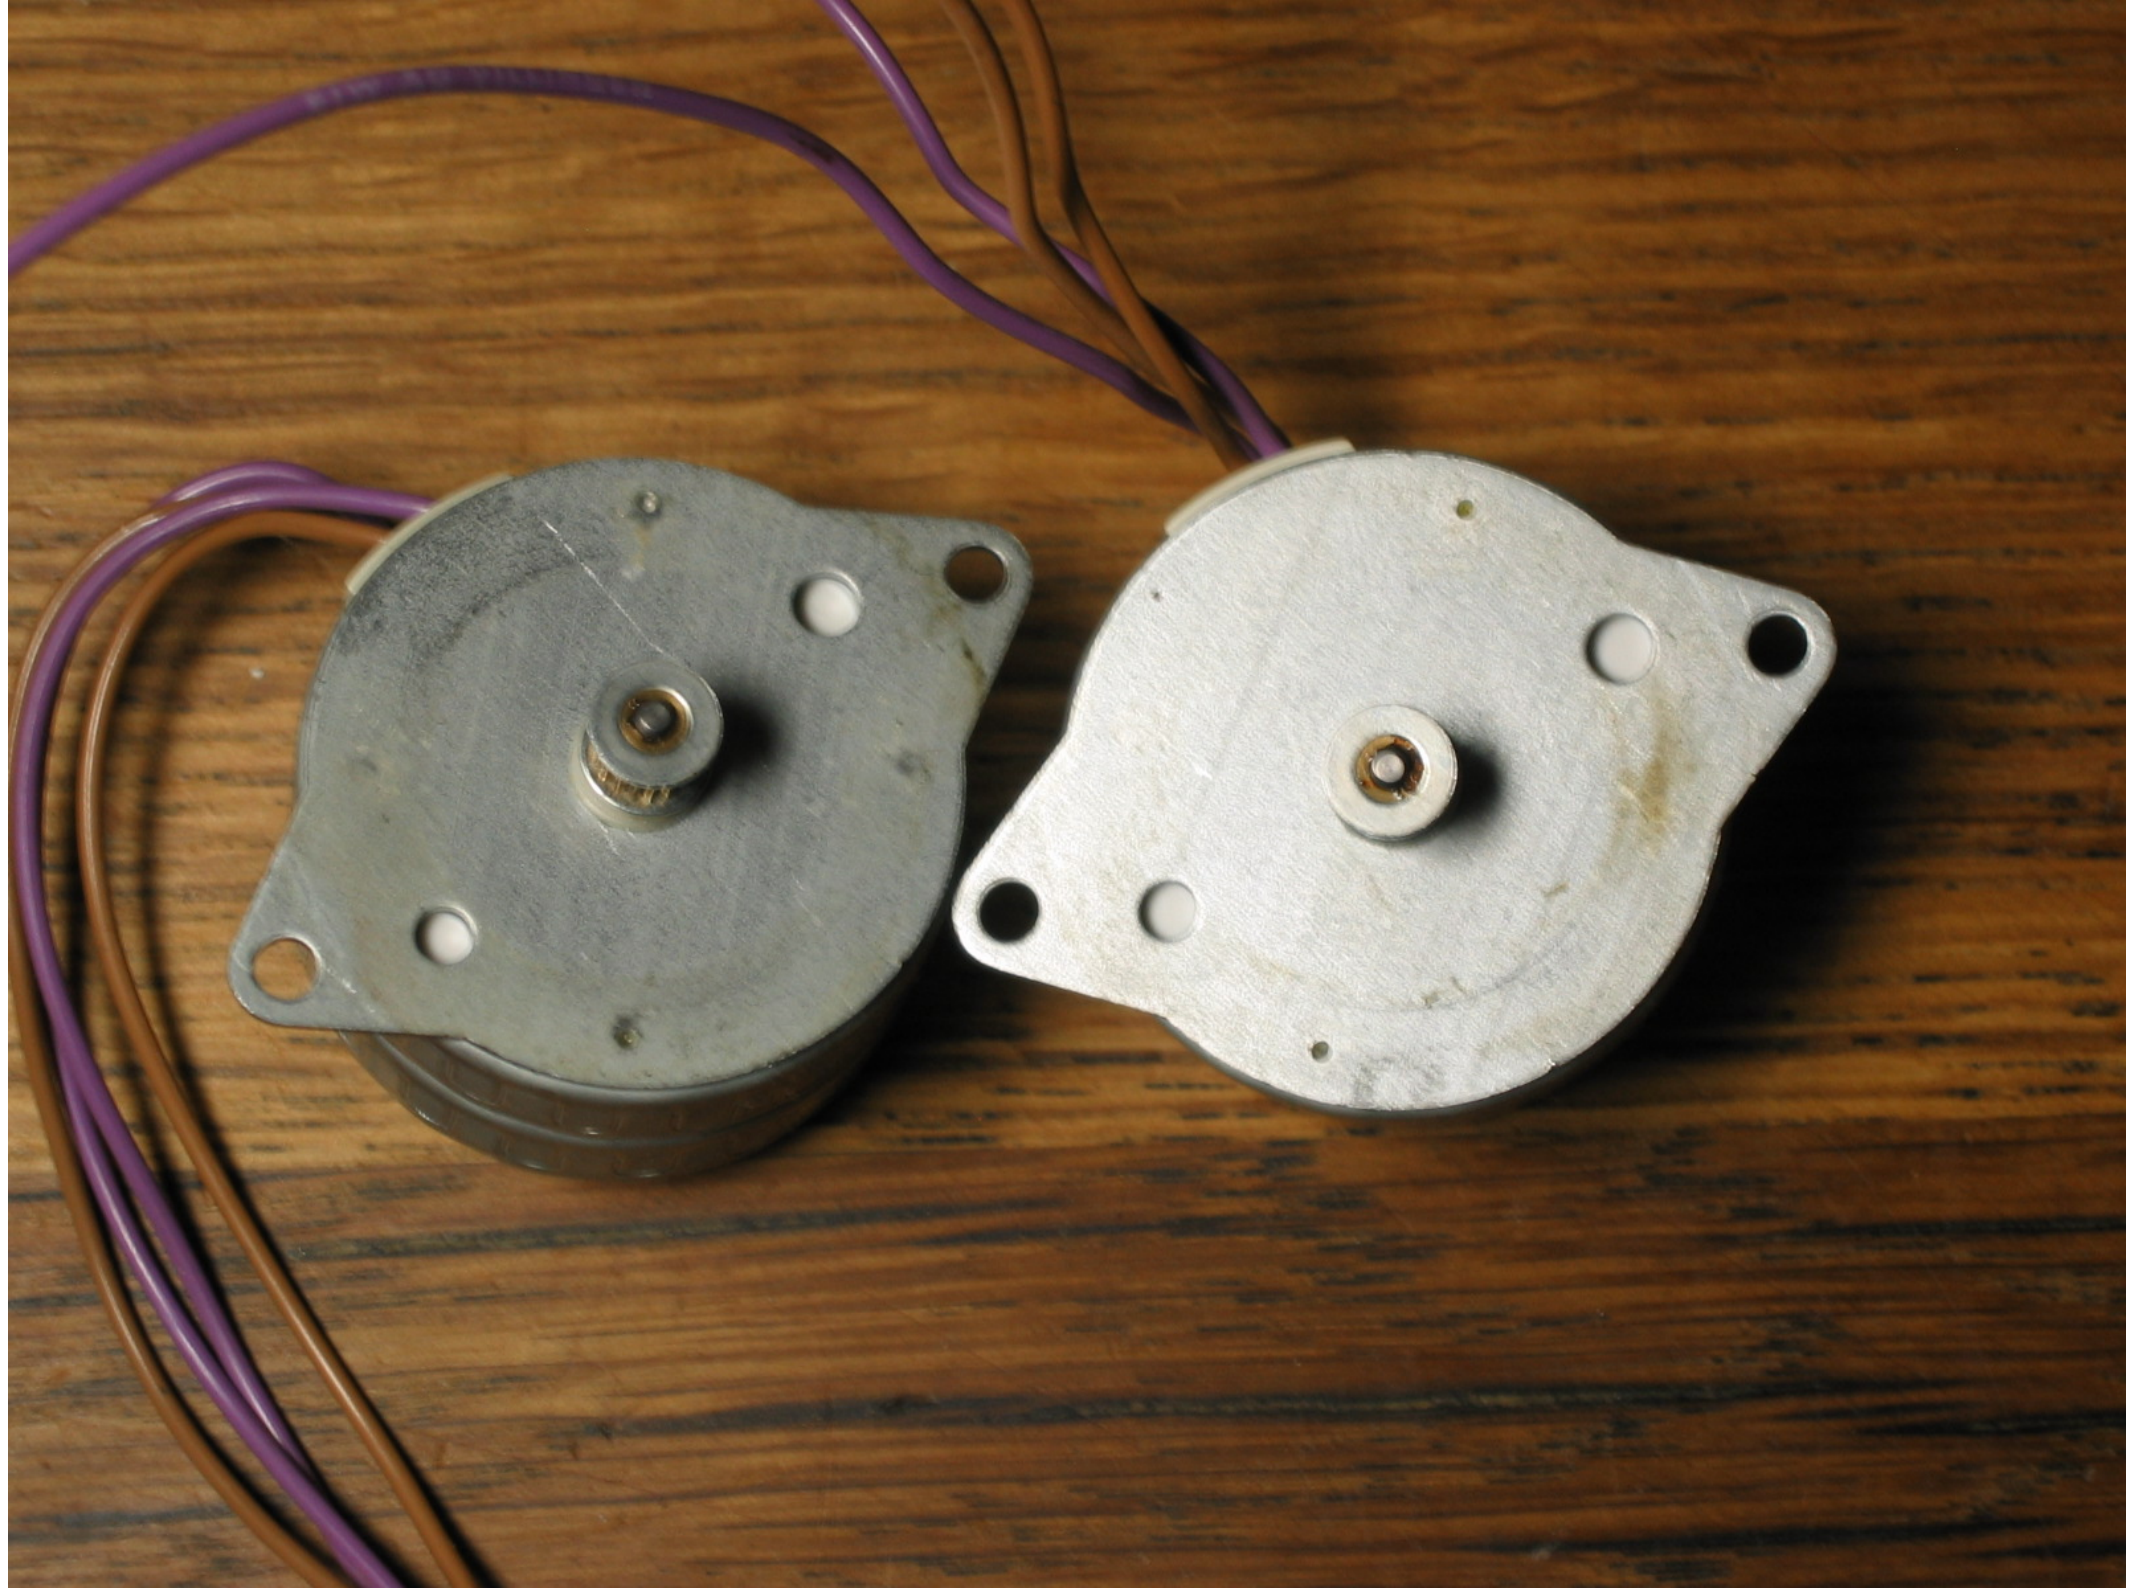

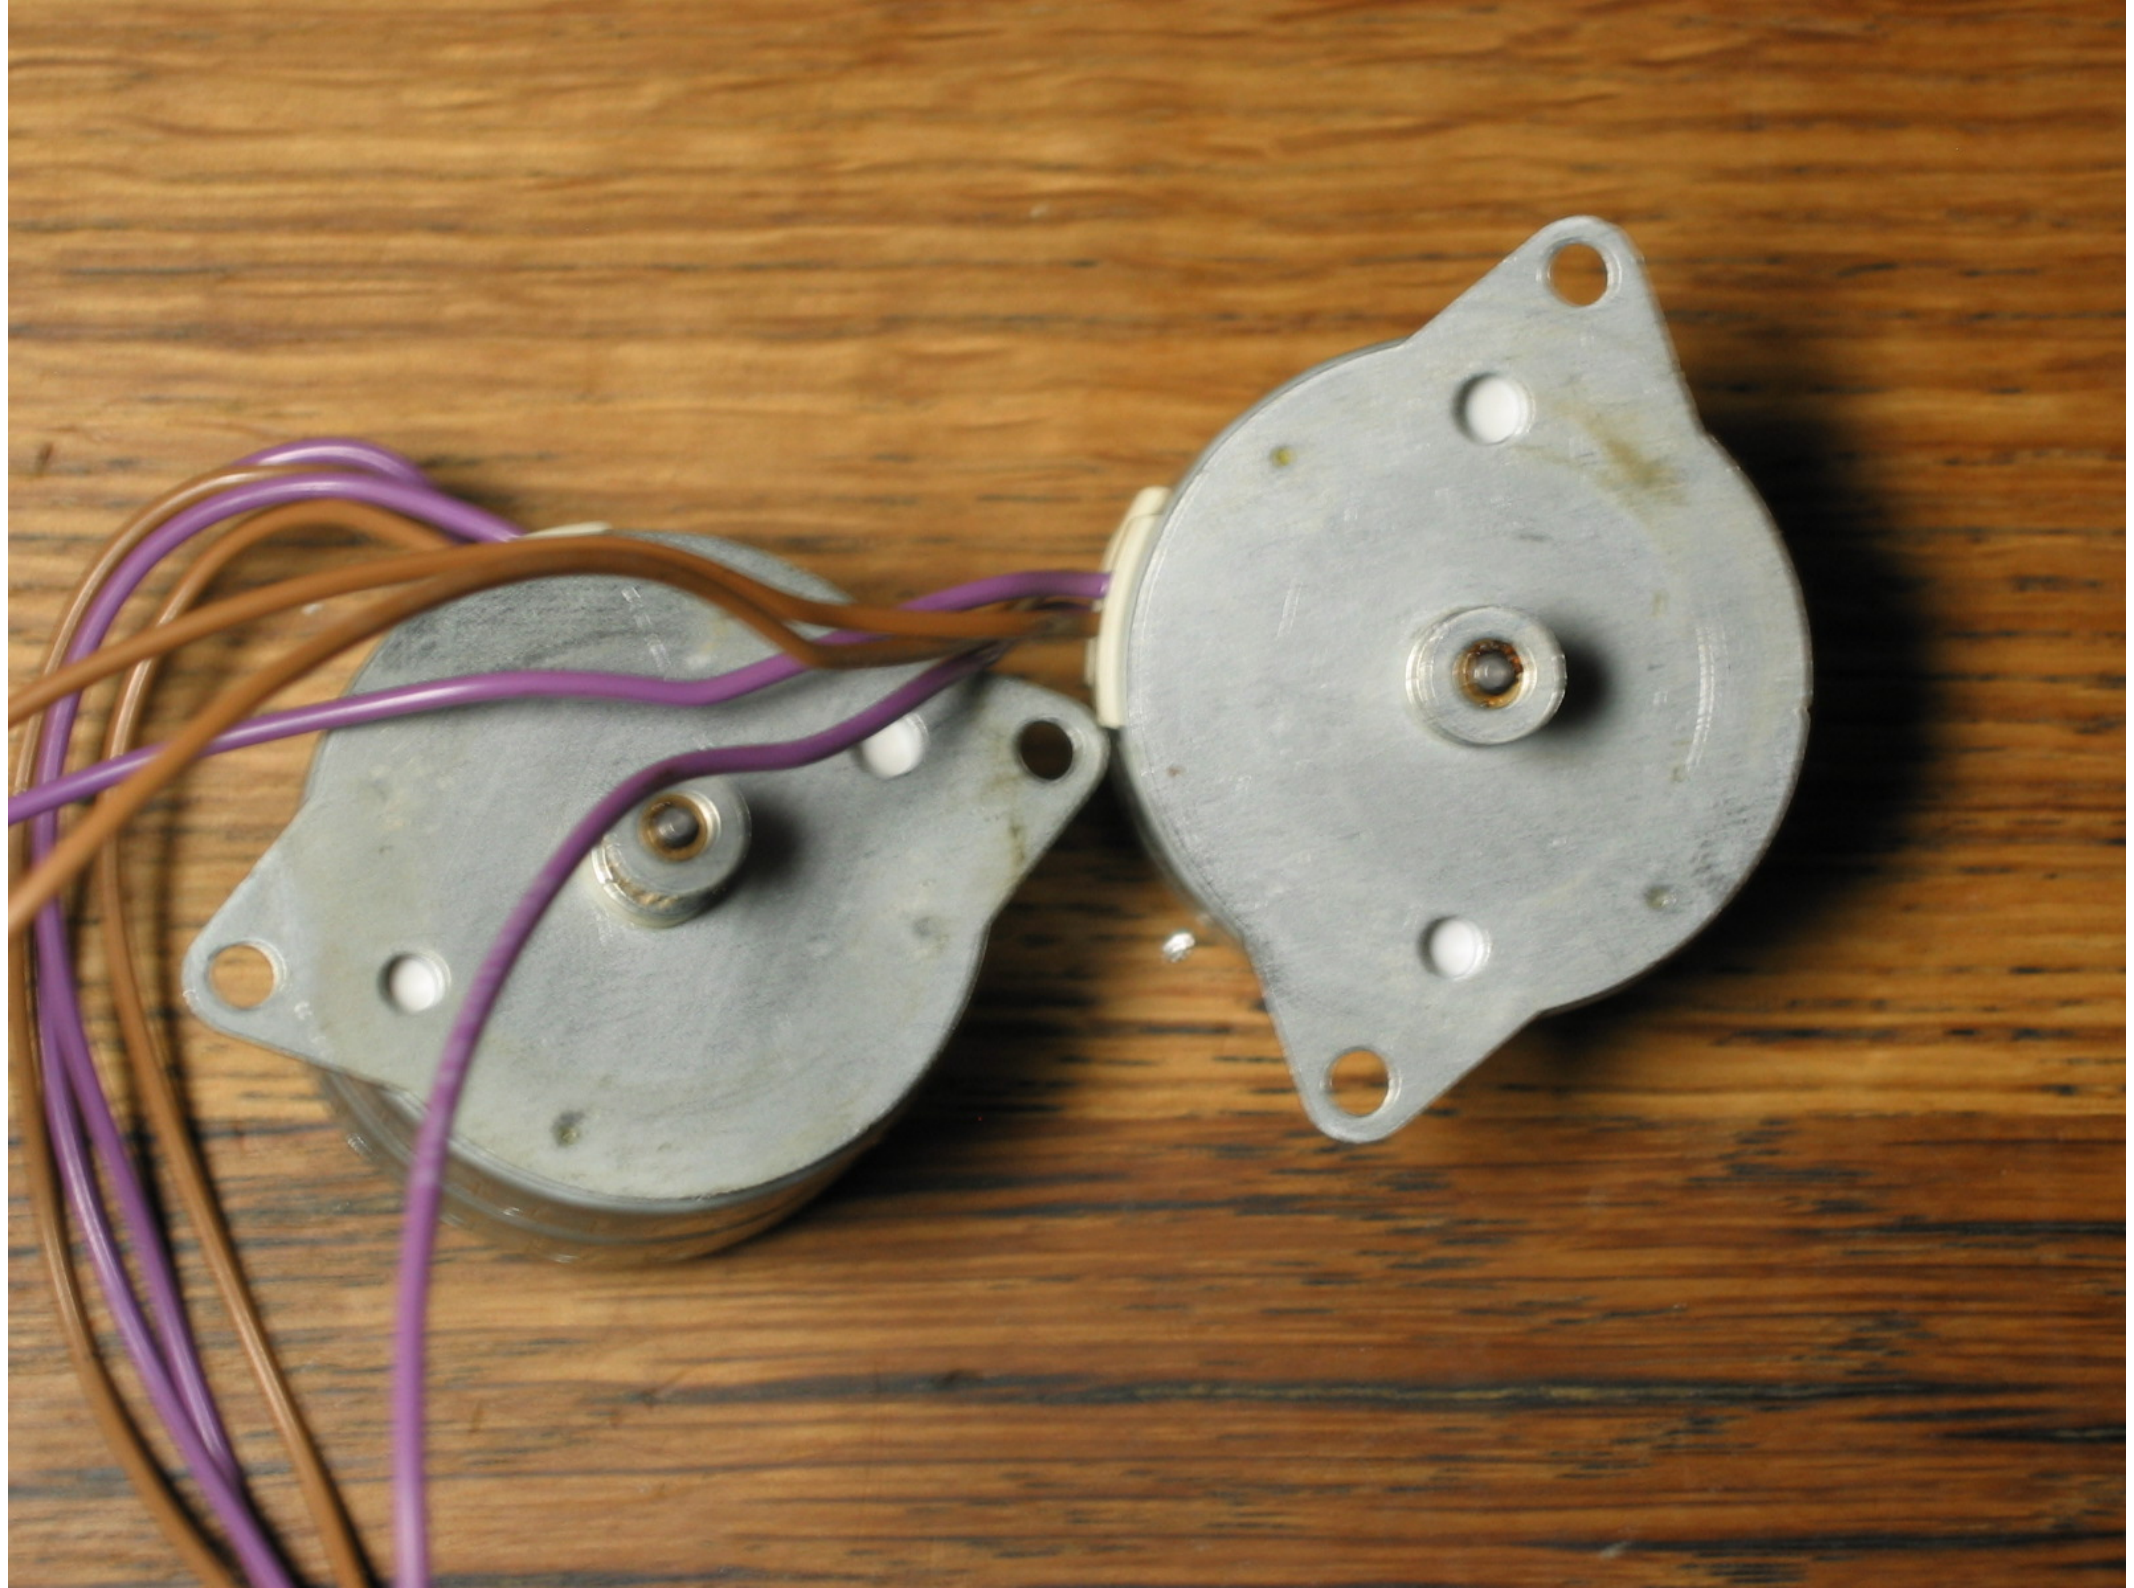













12V 35W


12V 35W


12V 35W

12V 35W

12V 35W


12V 35W

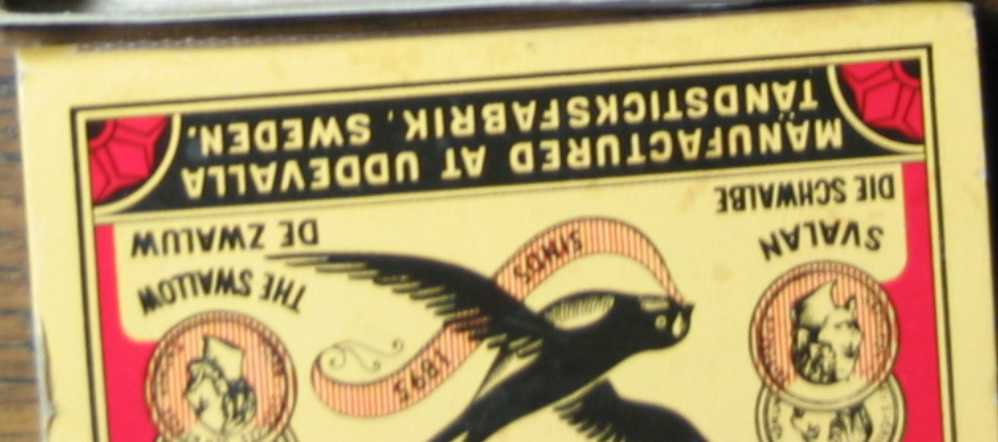


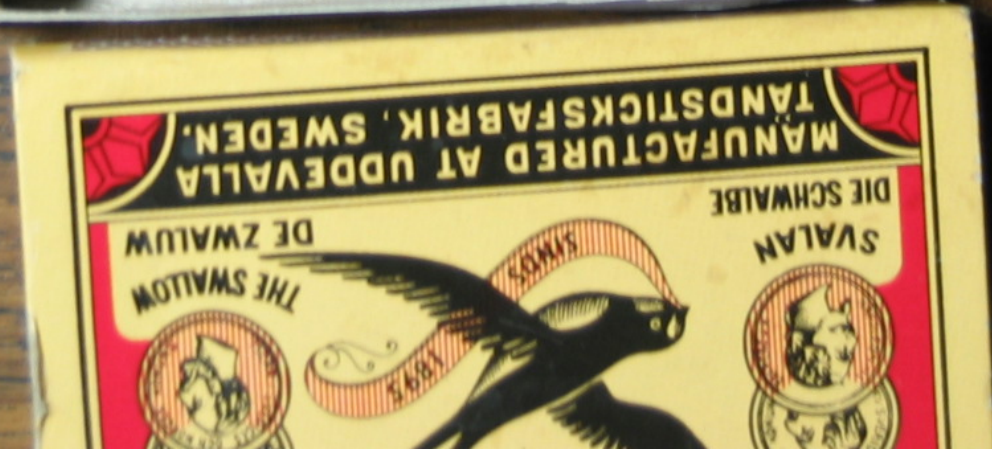






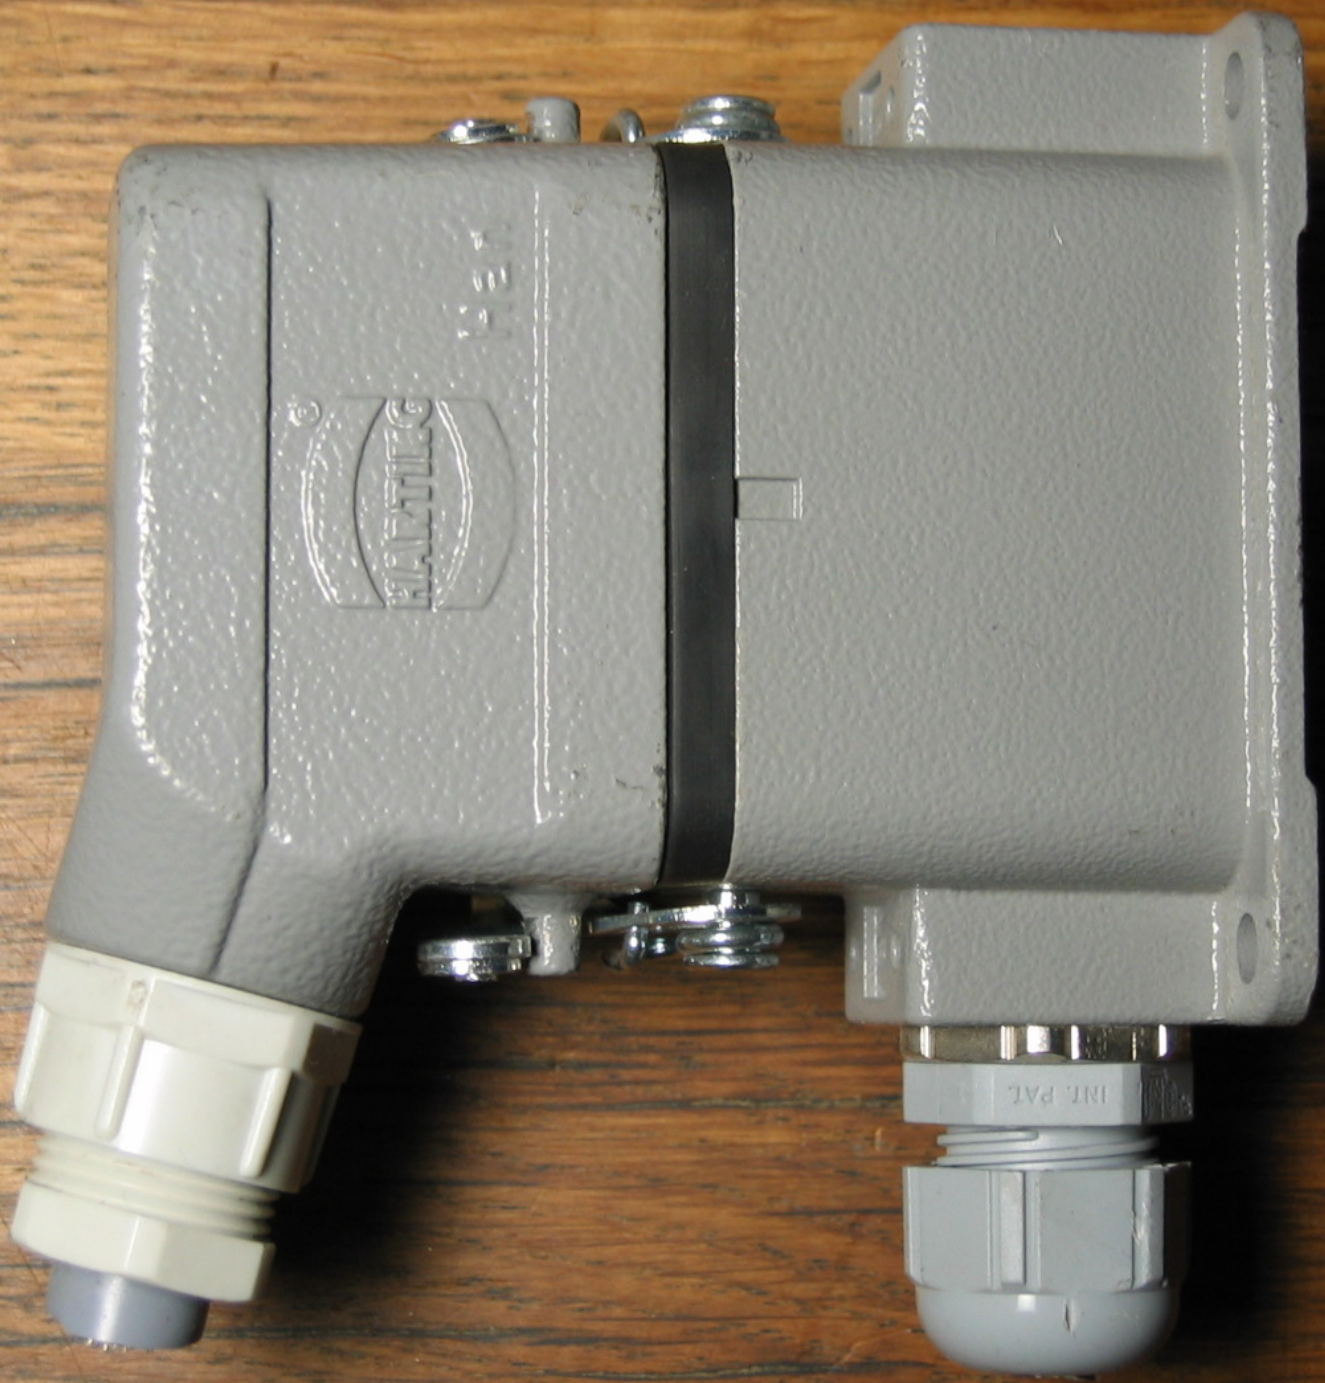


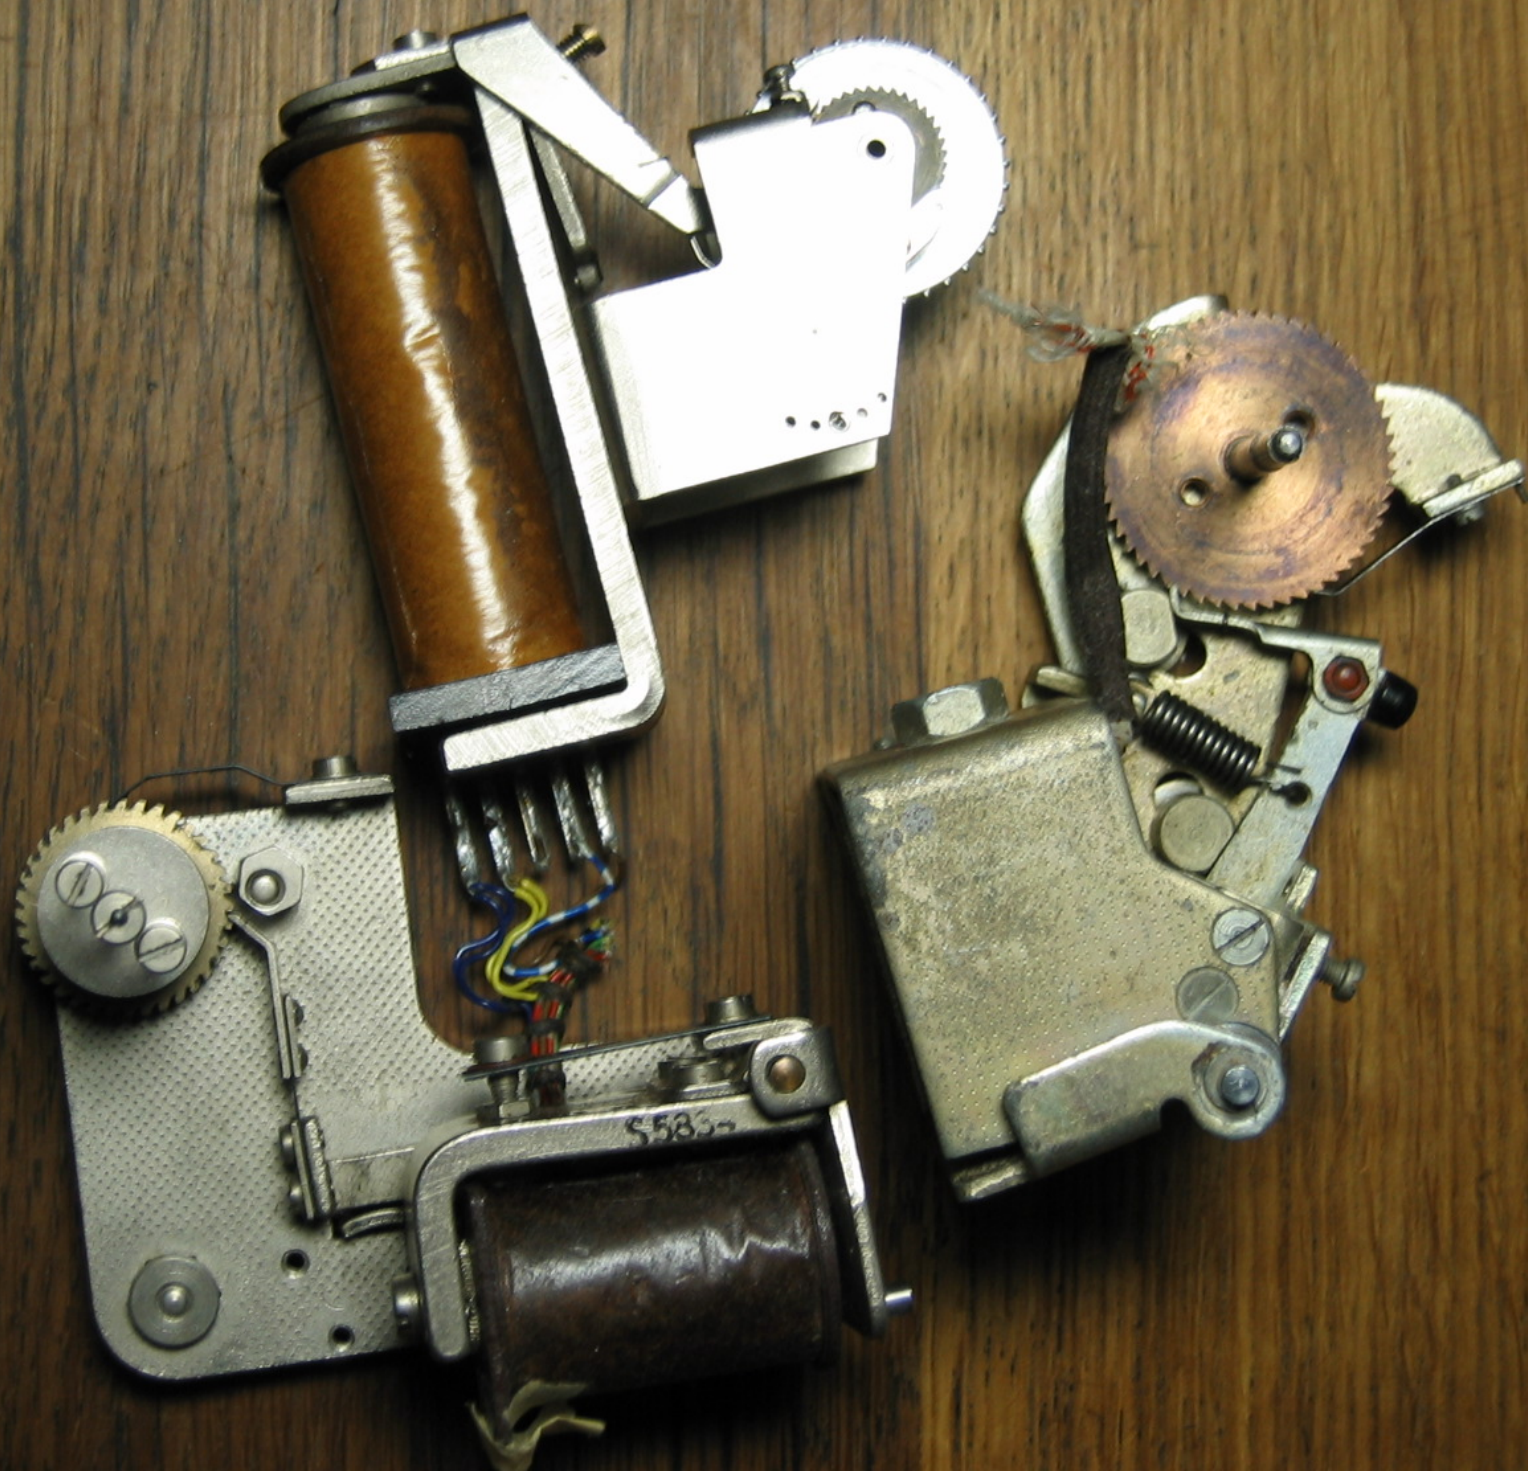


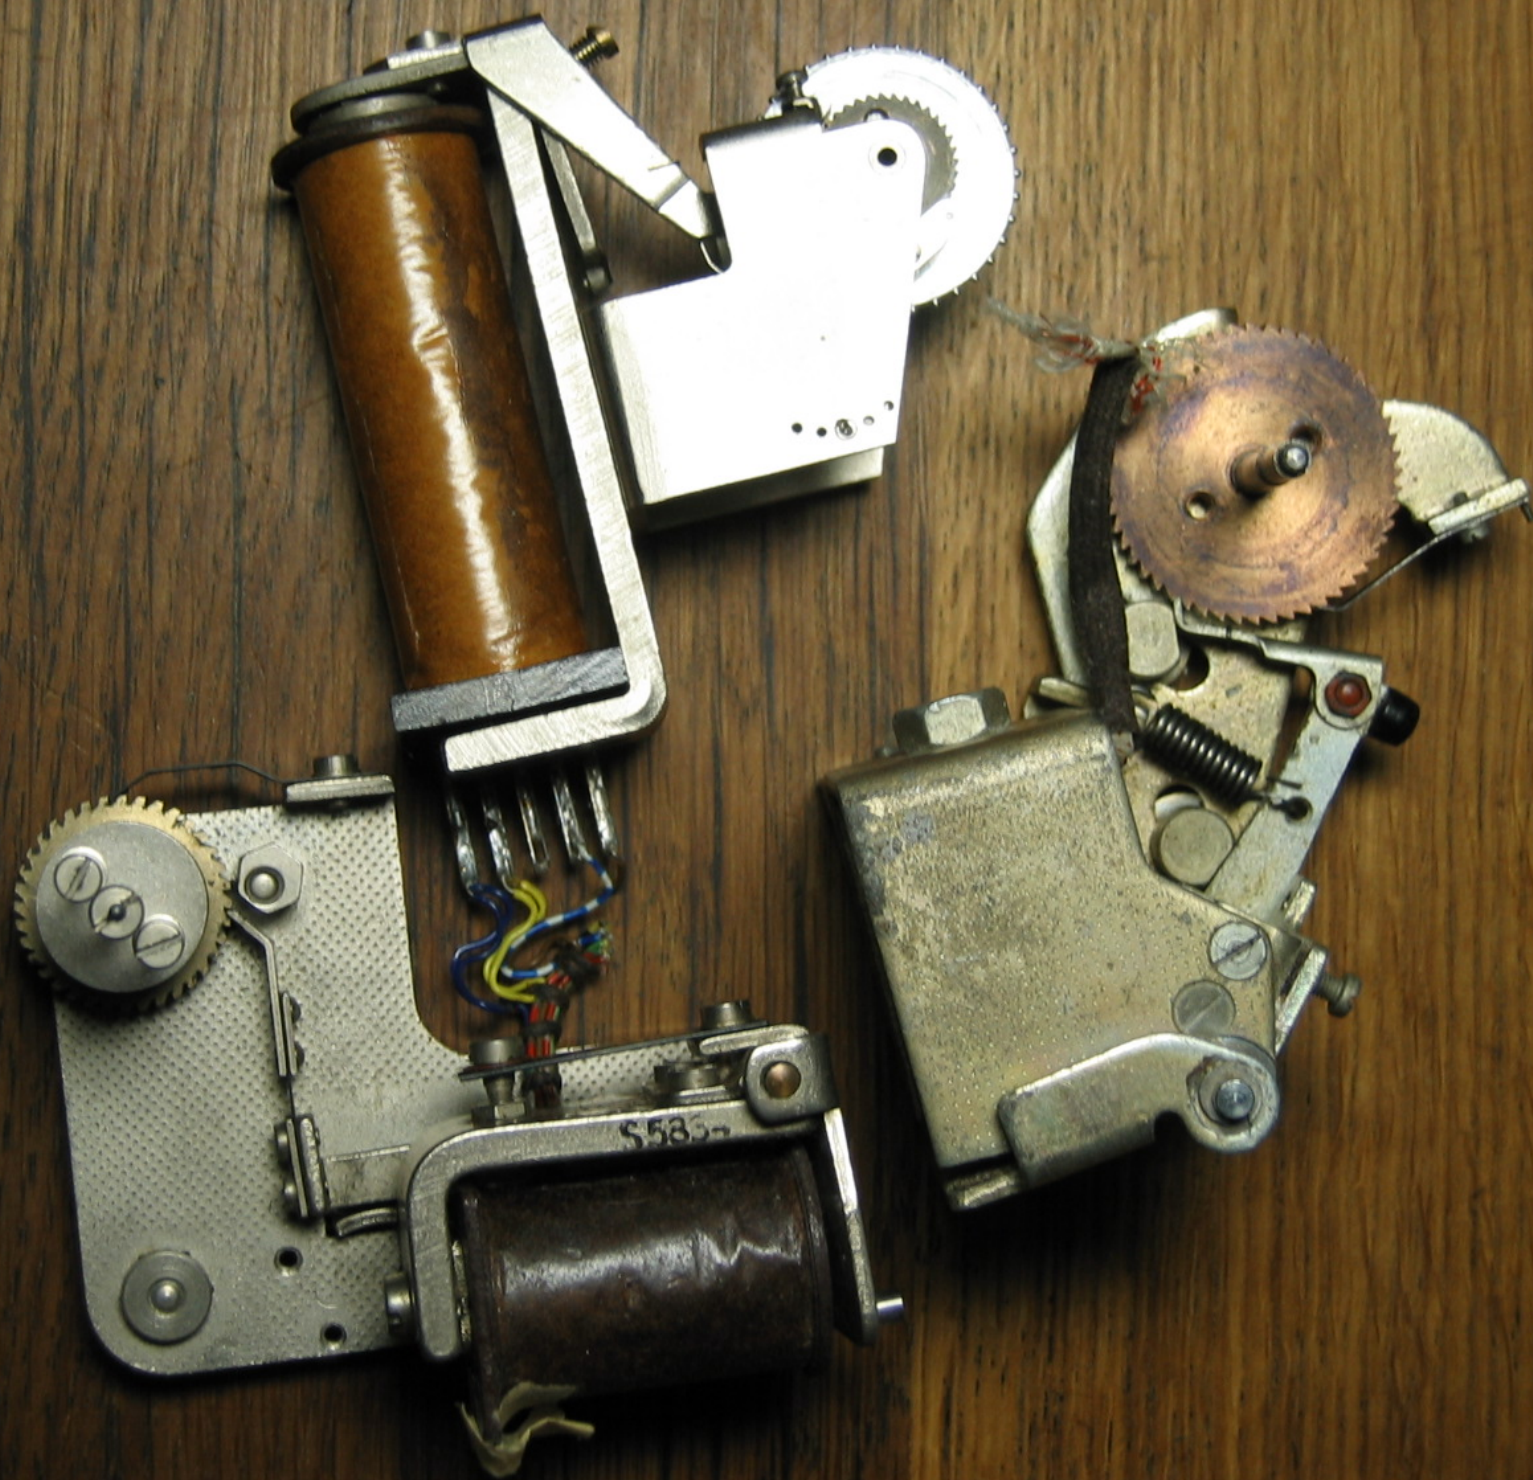








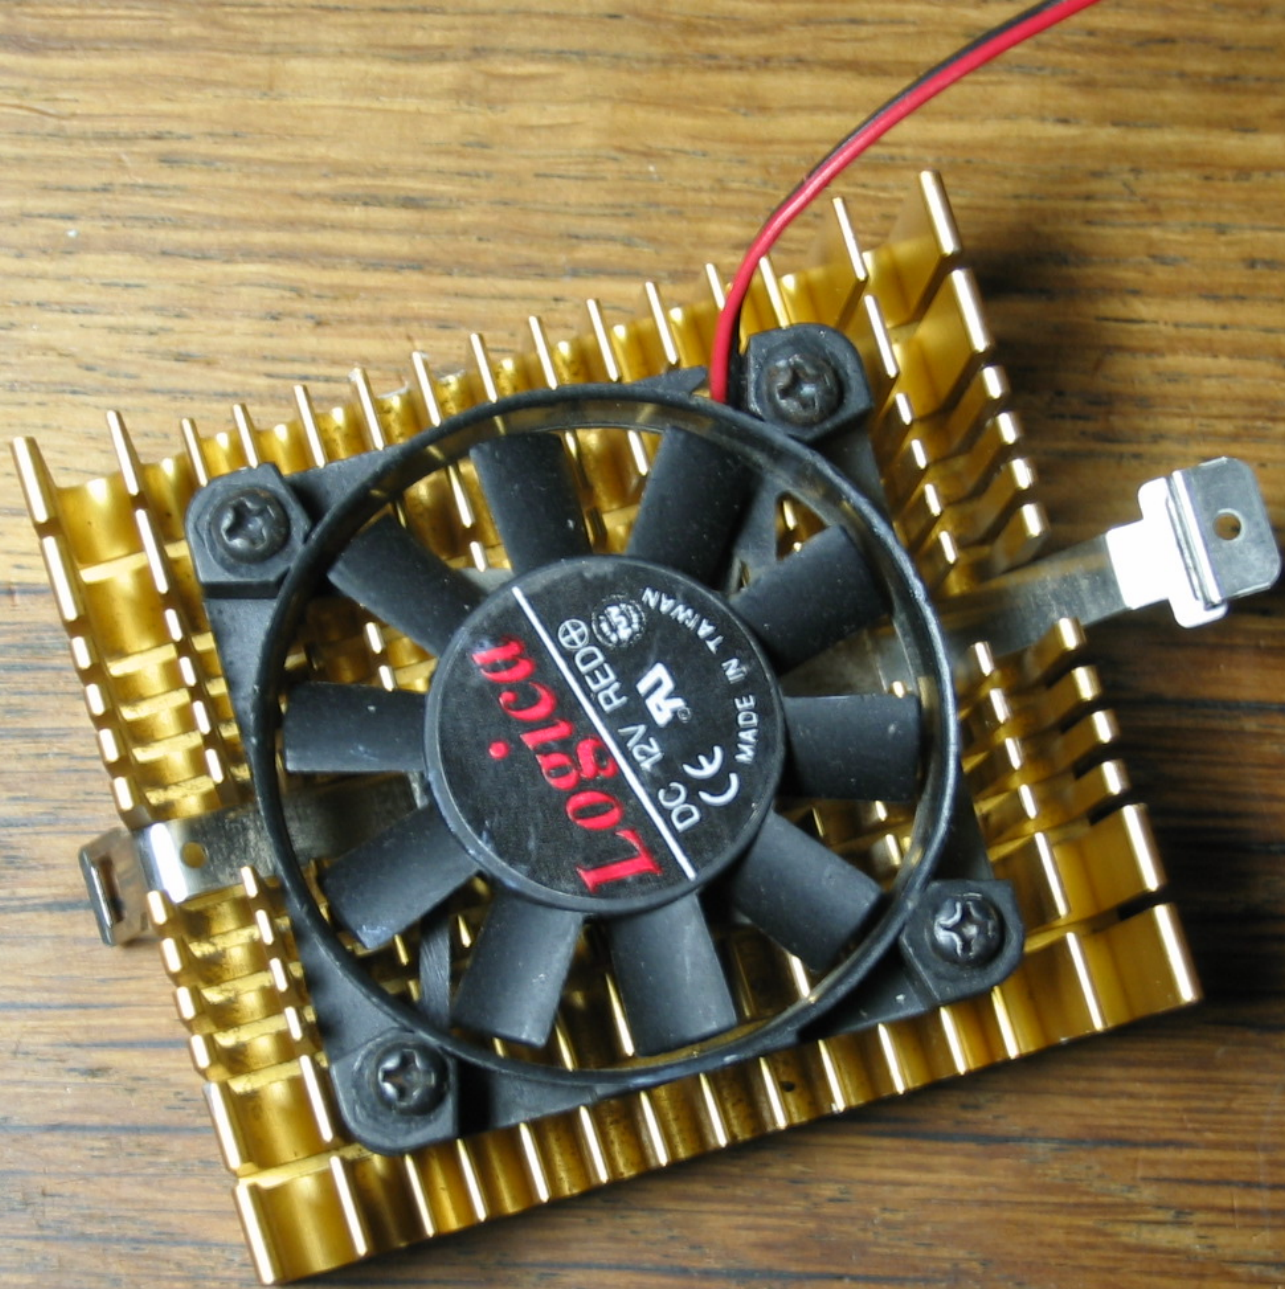


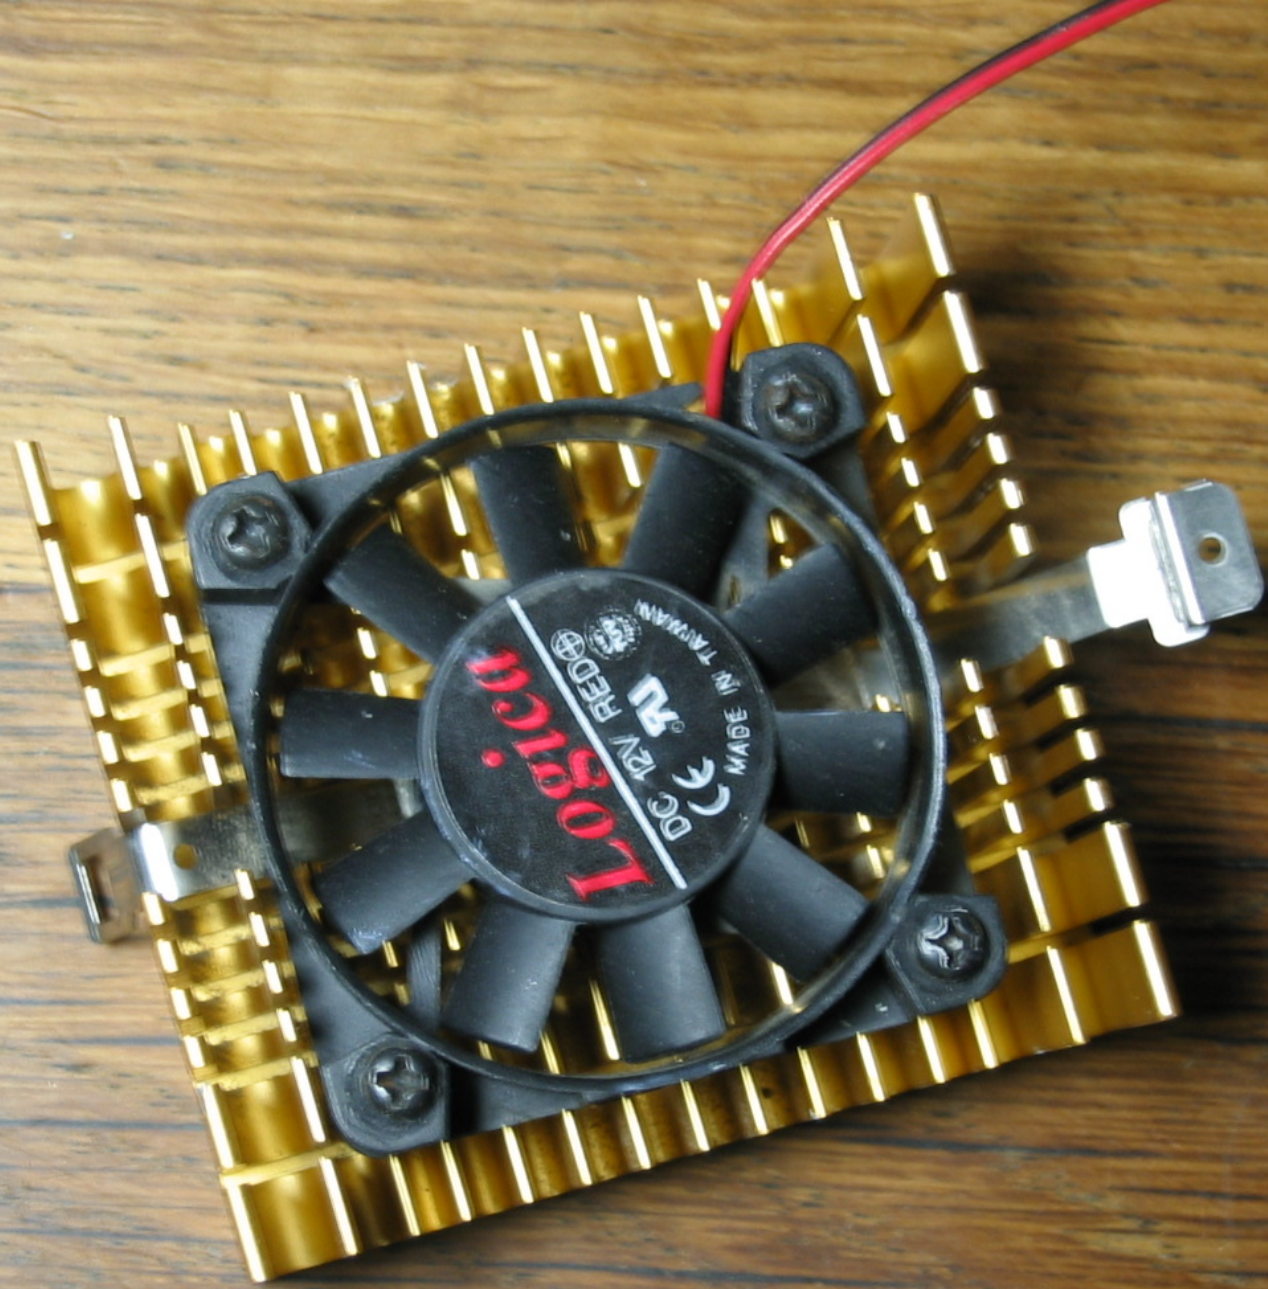


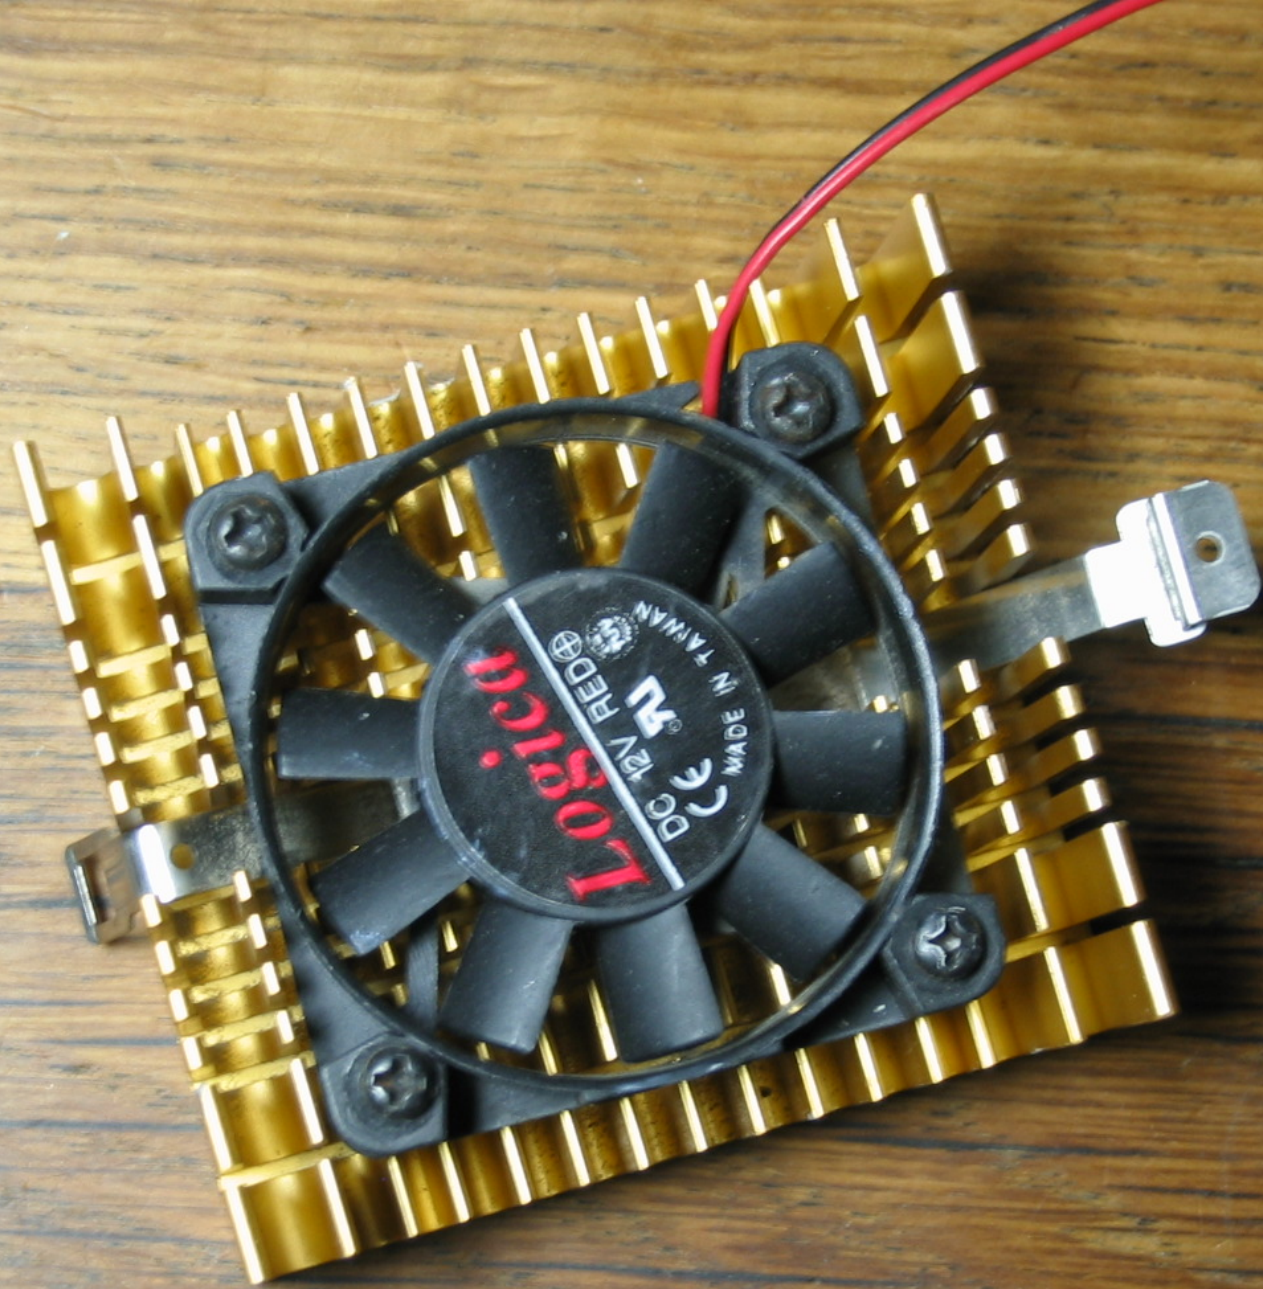

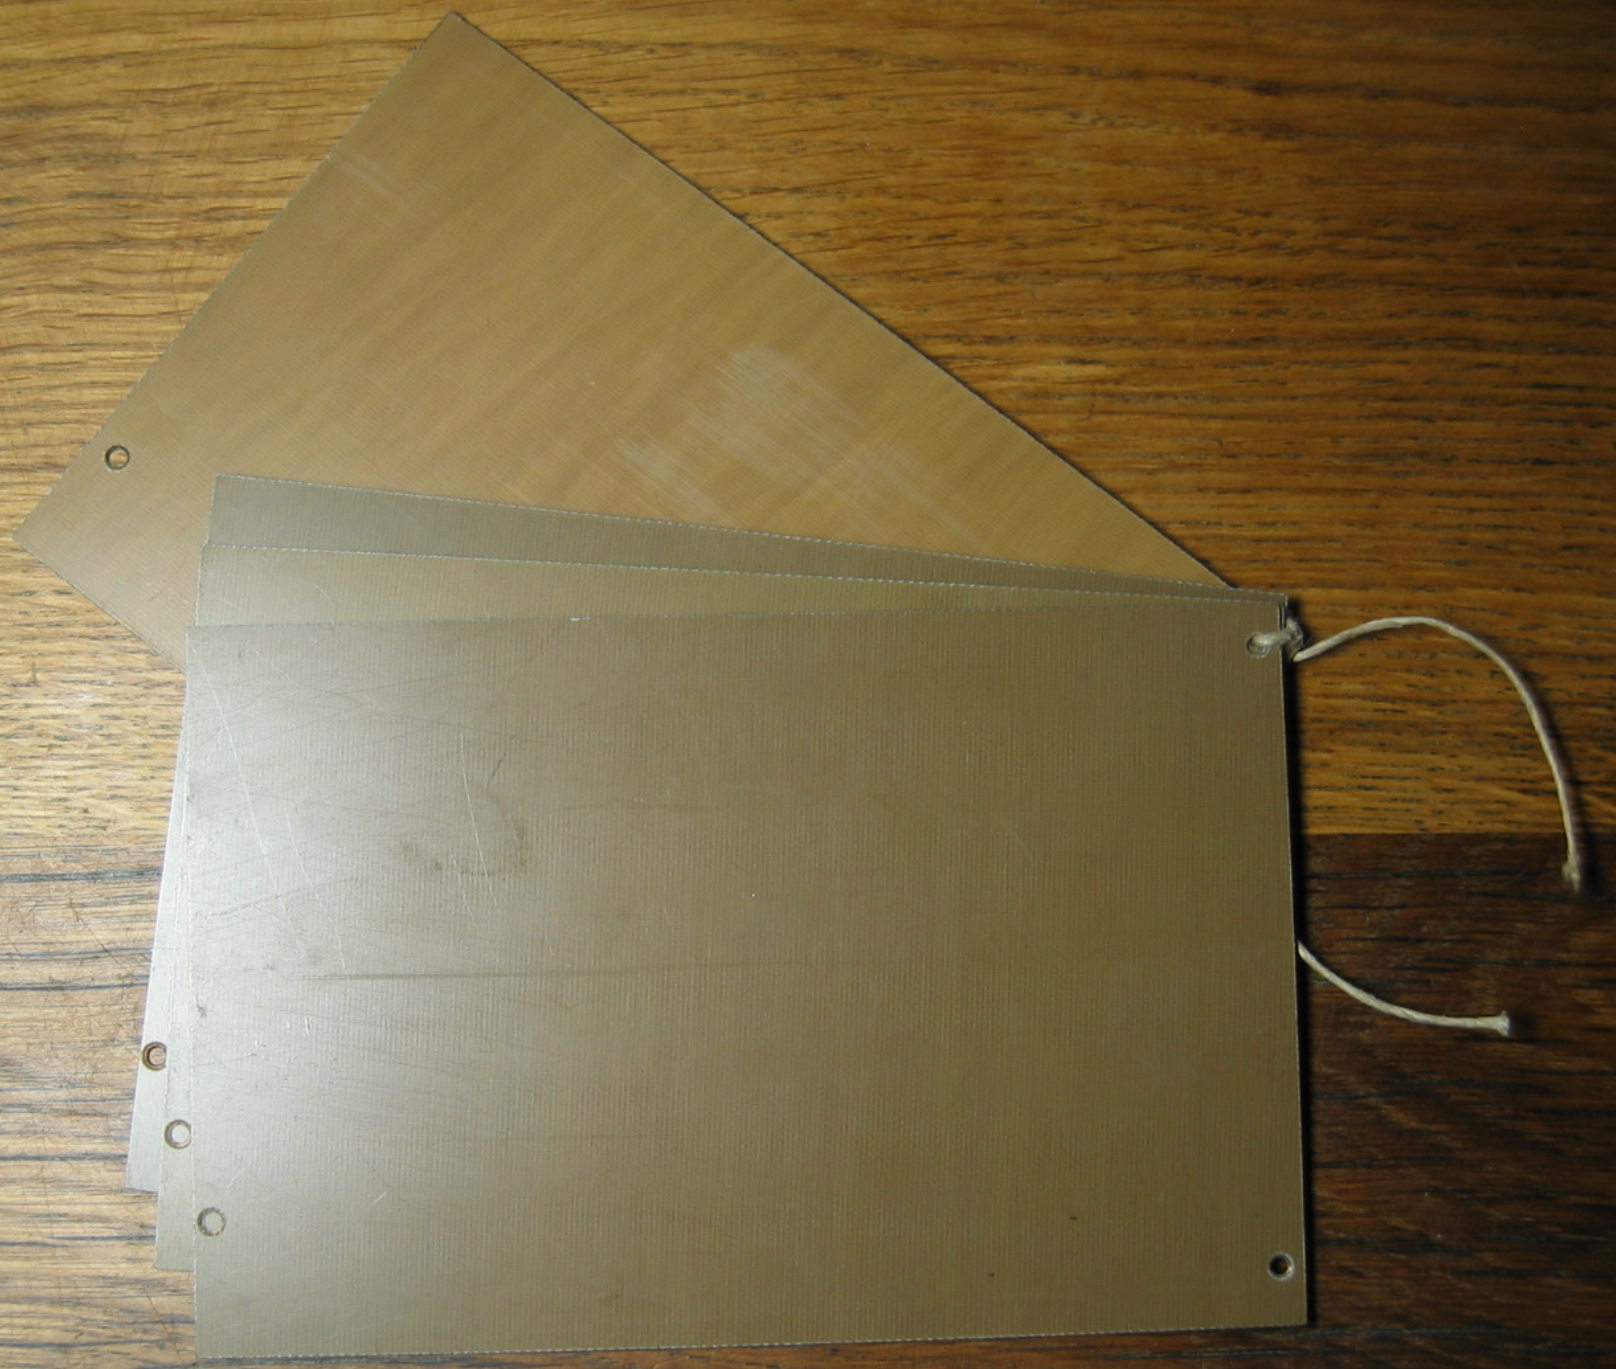


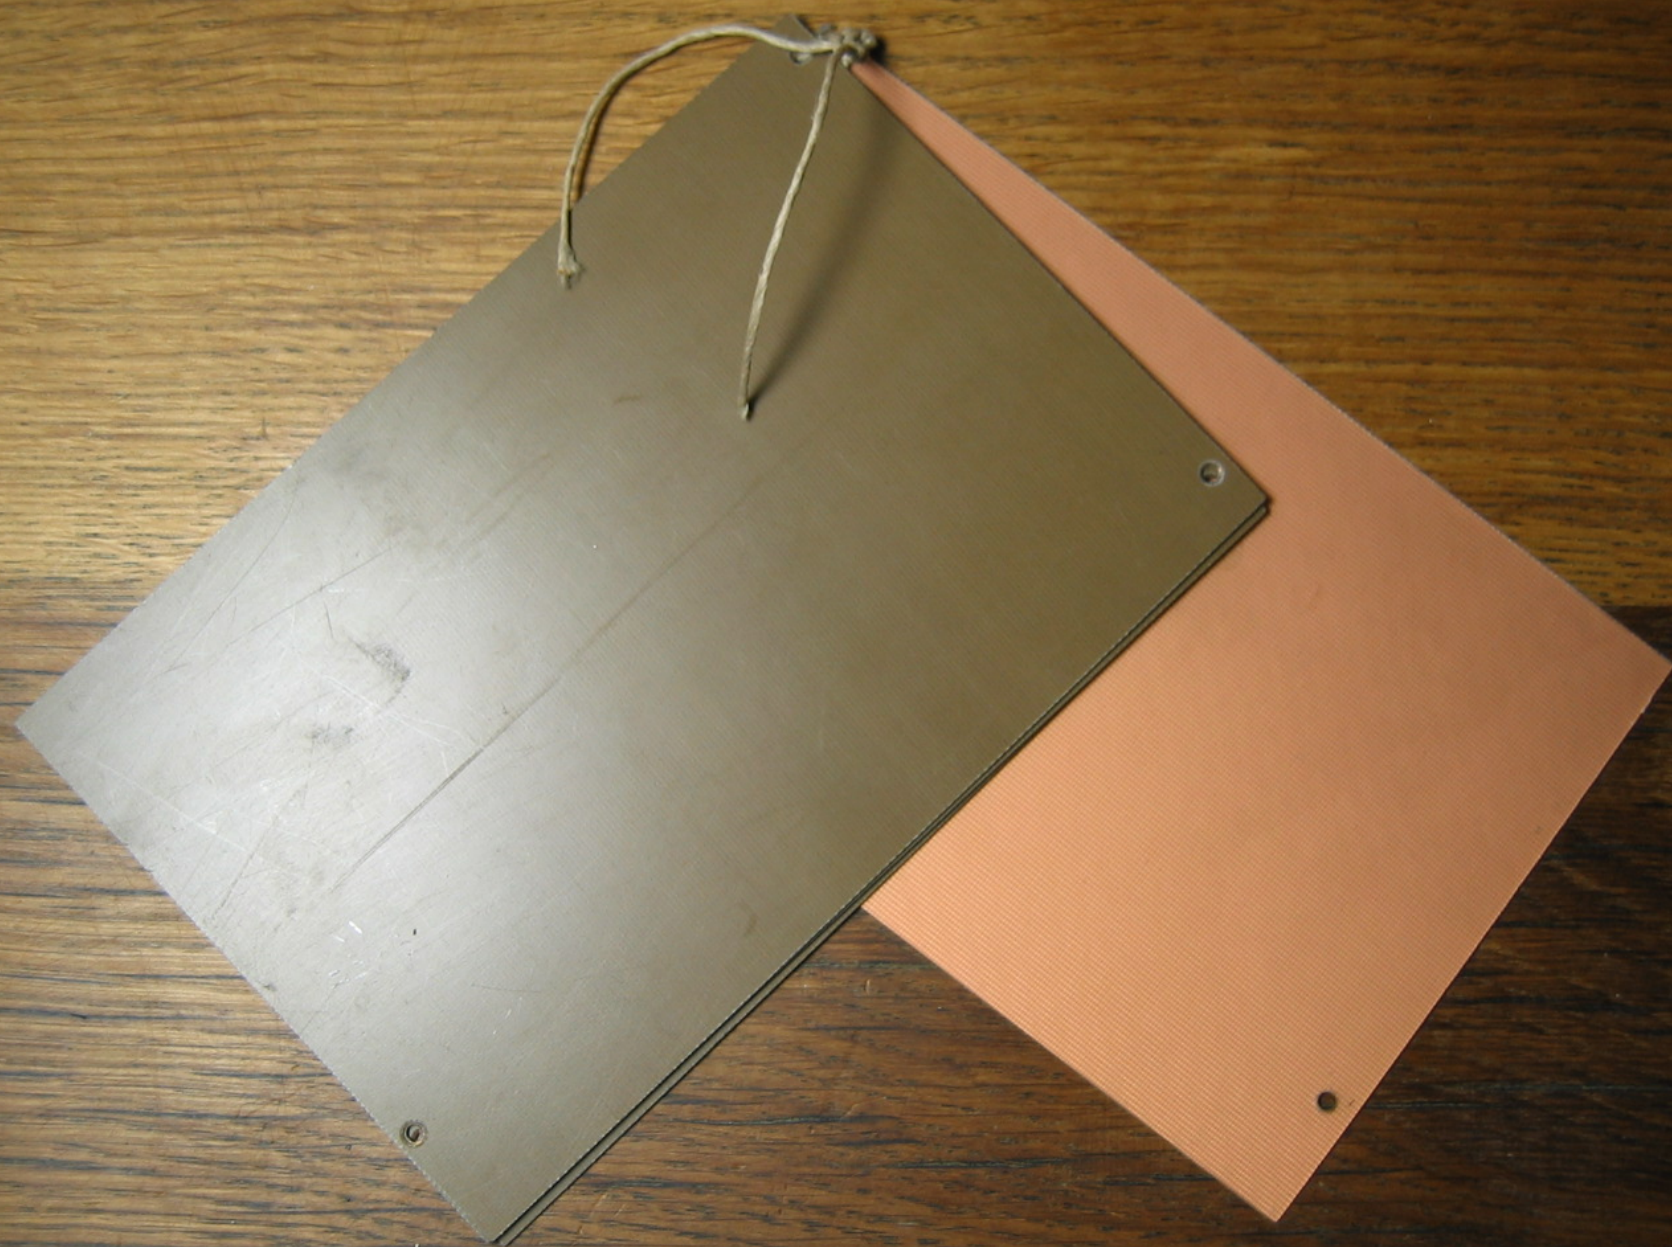


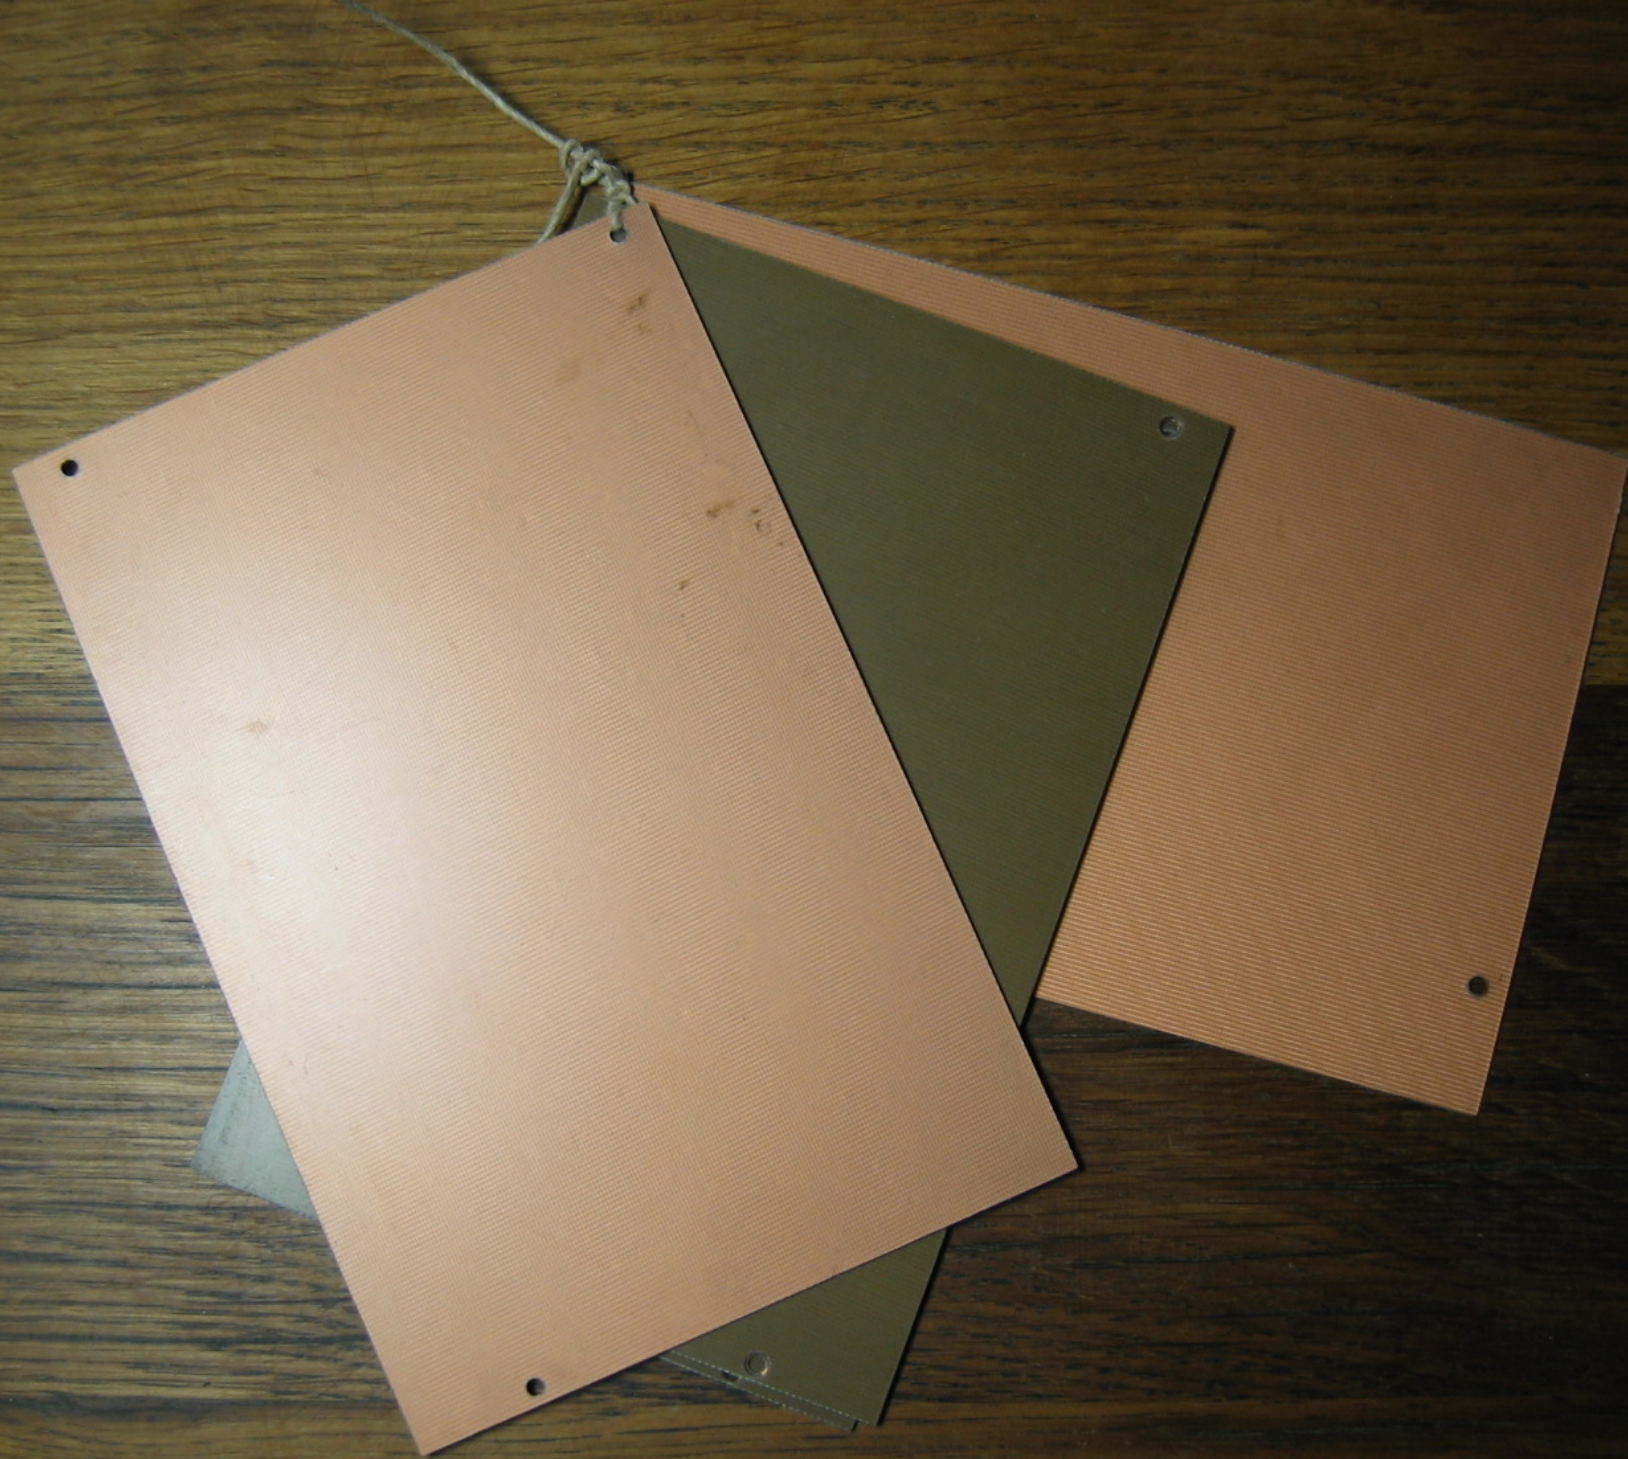

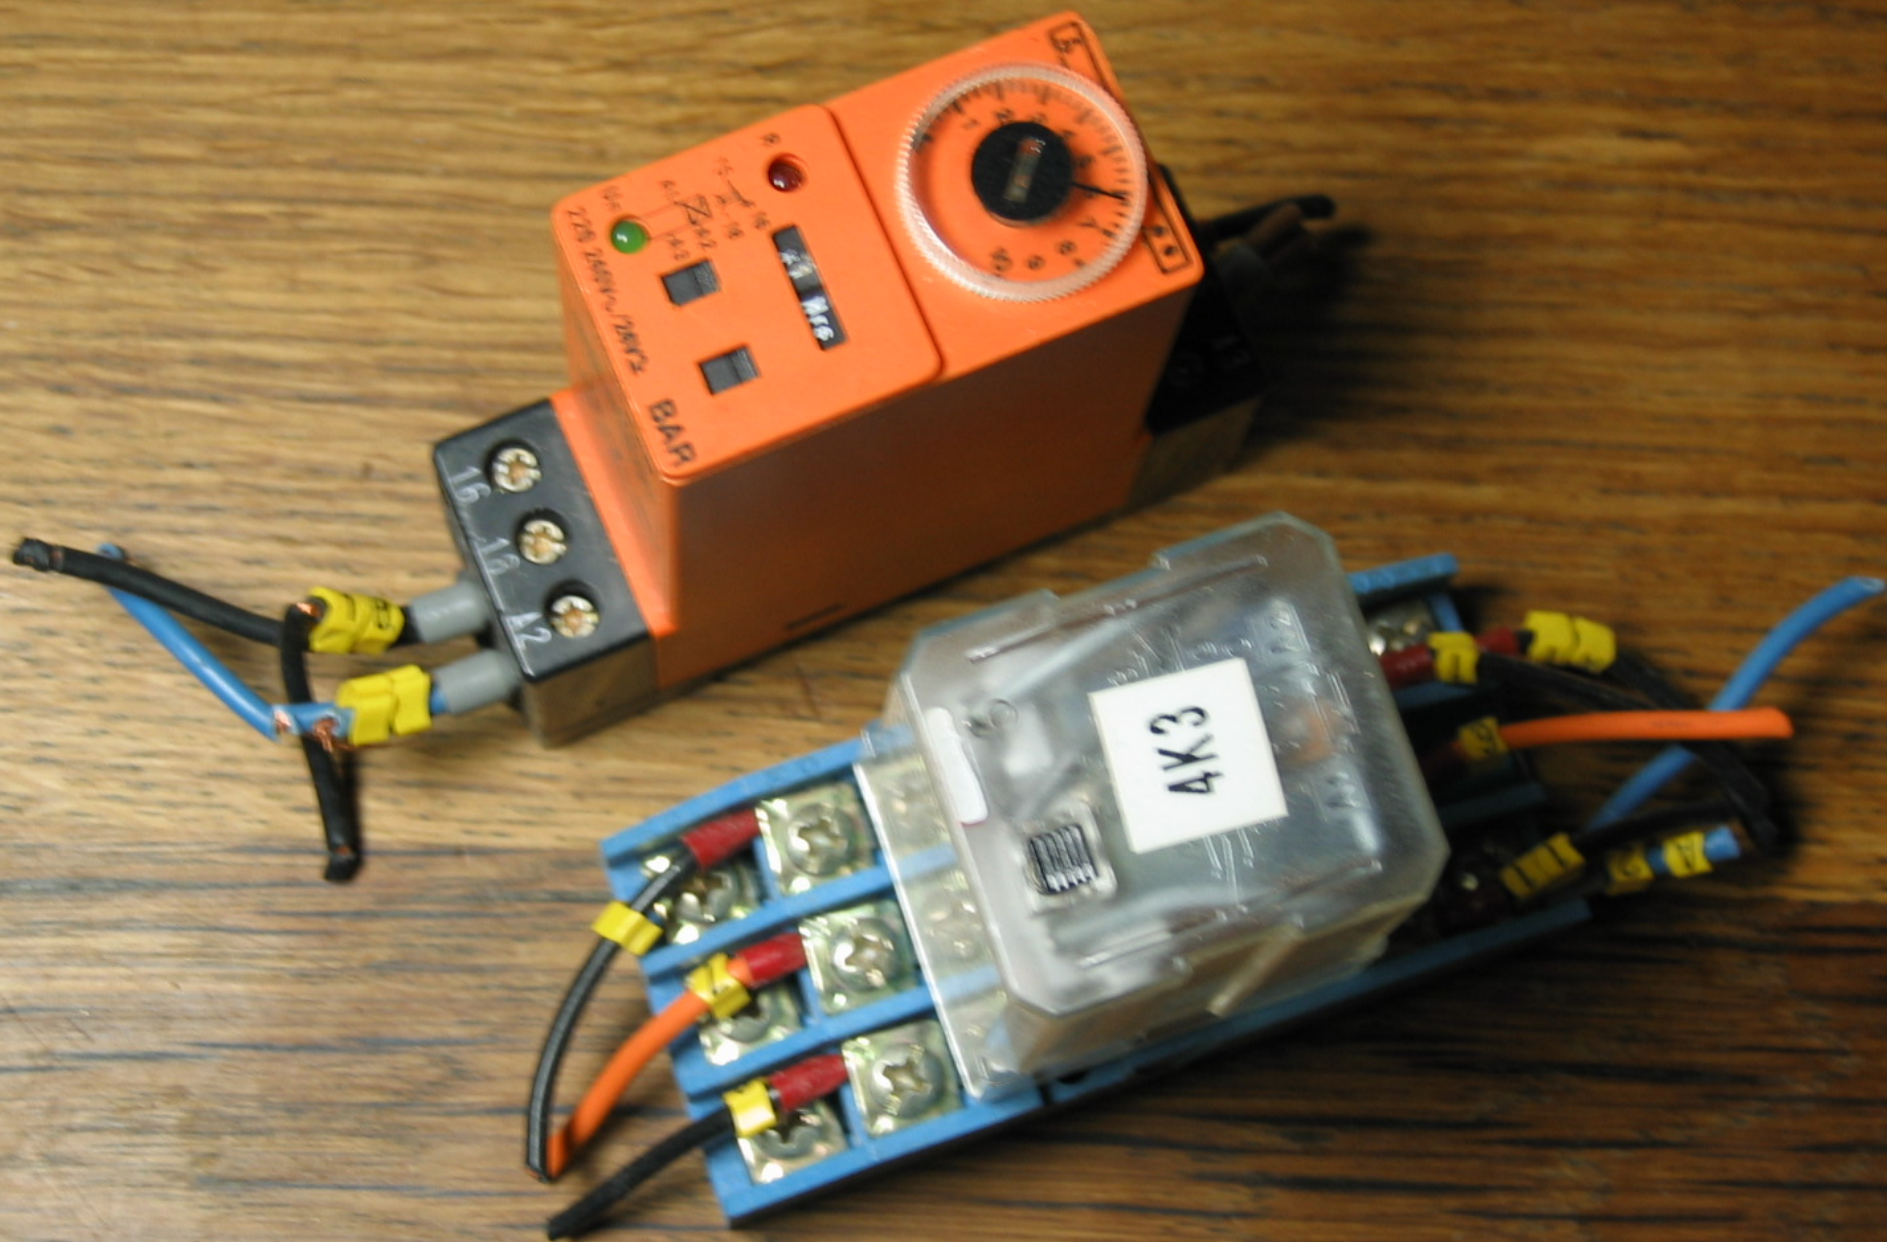



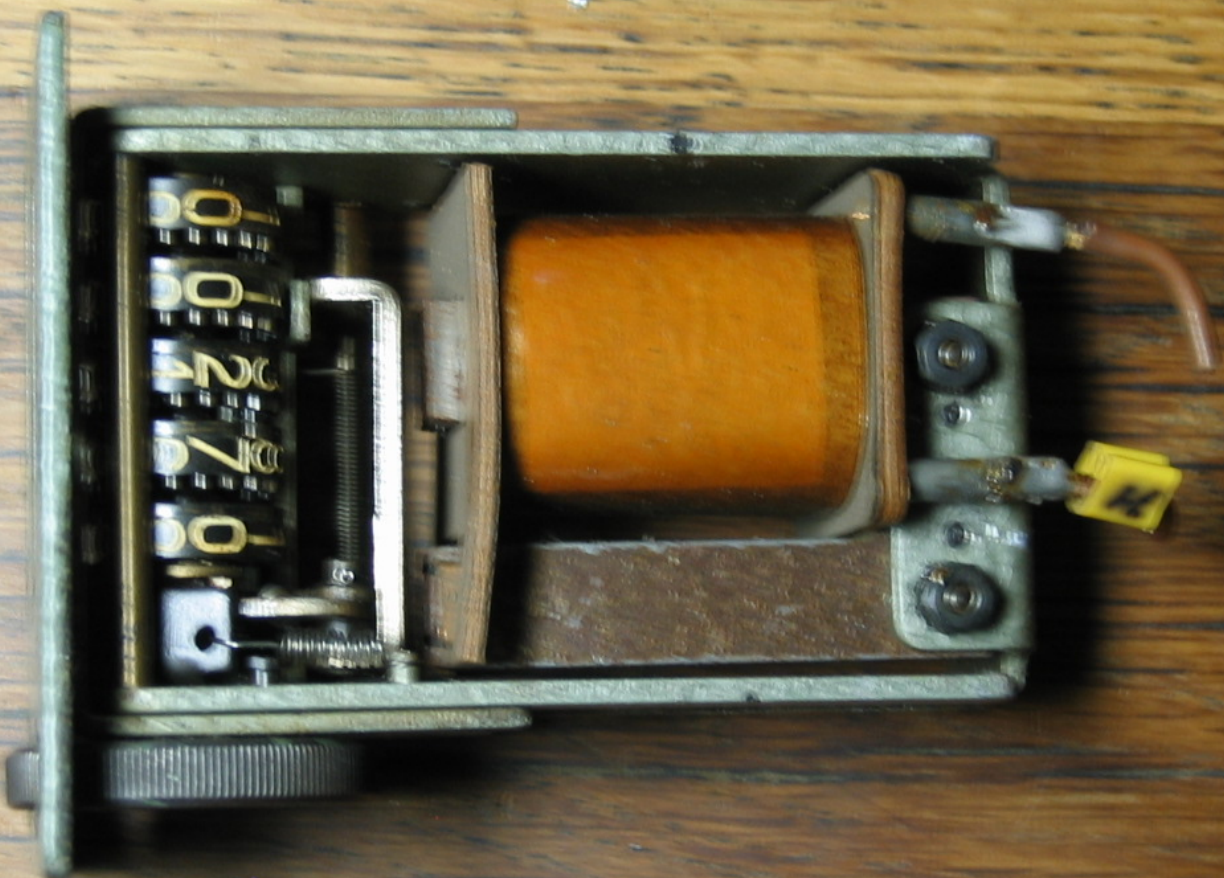

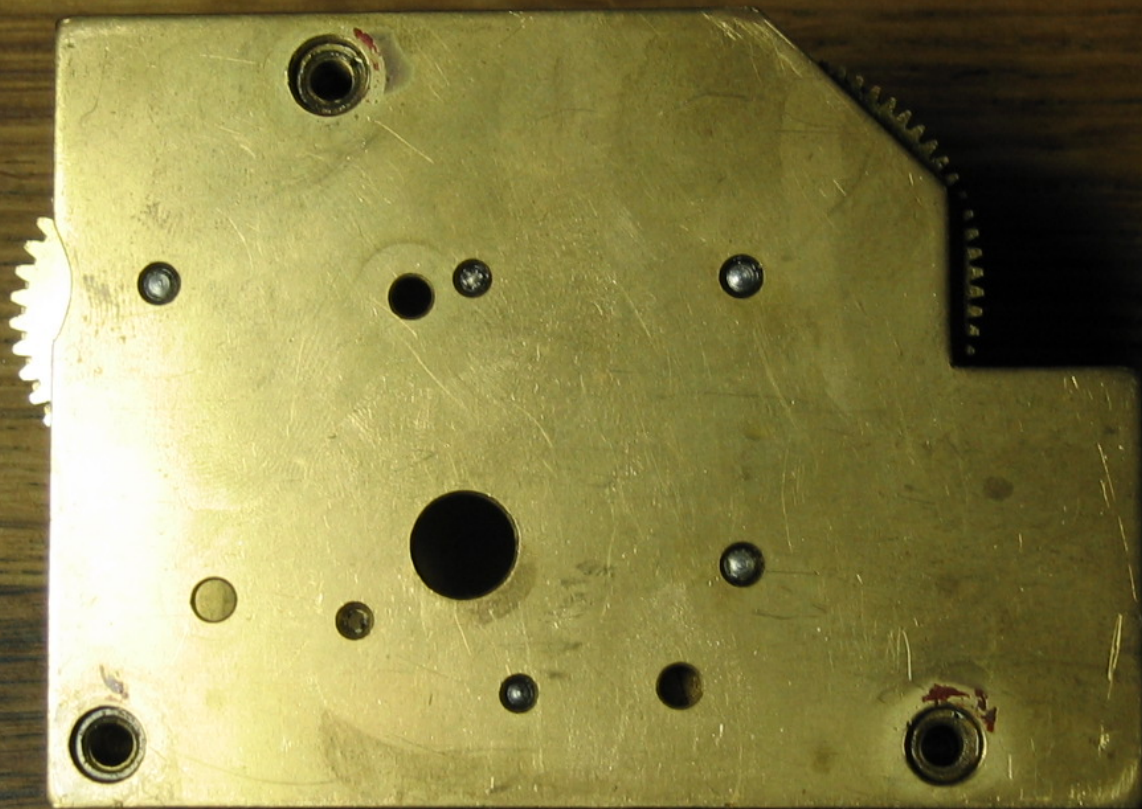

































Alecto®

GESTABILISEERDE
NET-ADAPTOR

MODEL: GS-1000

INPUT: 220V ~ 50Hz

POWER: 18W

OUTPUT: 1.5-3-4.5-
6-7.5-9-12V 

CURRENT: 1A max



Alecto[®]

GESTABILISEERDE
NET-ADAPTOR

MODEL: GS-1000

INPUT: 220V ~ 50Hz

POWER: 18W

OUTPUT: 1,5-3-4,5-
6-7,5-9-12V V_{DC}

CURRENT: 1A max





















SÄKERHETS TÄNDSTICKOR

PARAFFINERADE



SVALAN
DIE SCHWALBE



THE SWALLOW
DE ZWALUW

MANUFACTURED AT UDDEVALLA
TÄNDSTICKSFABRIK, SWEDEN.













































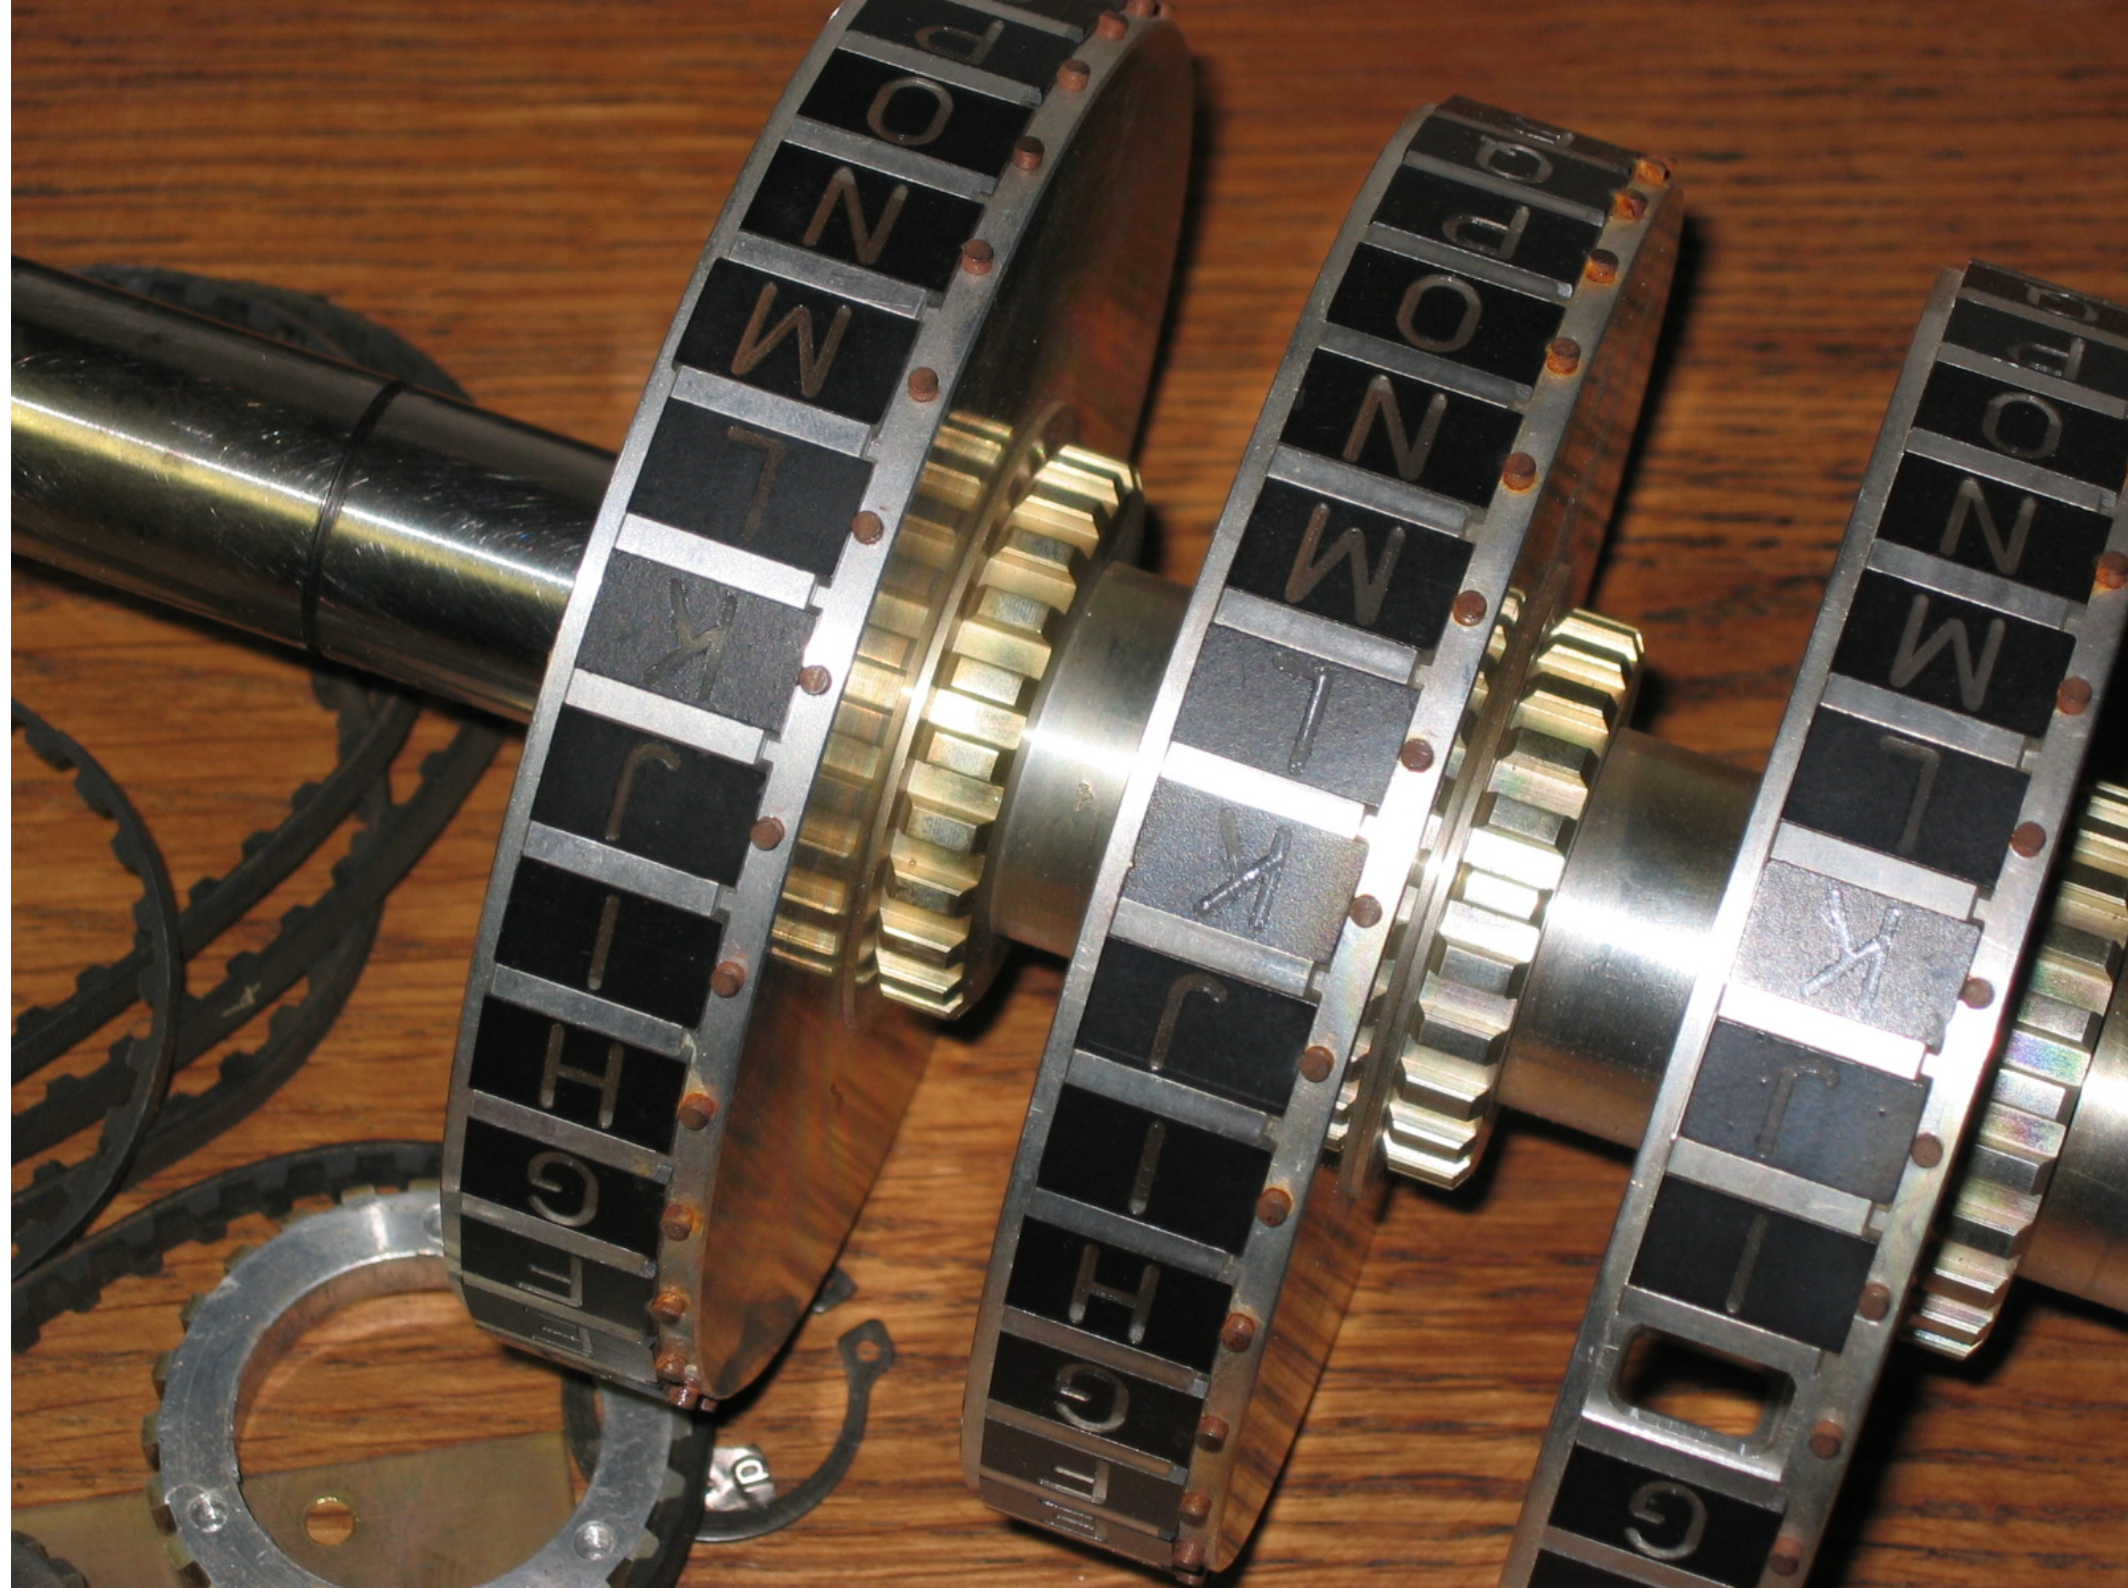




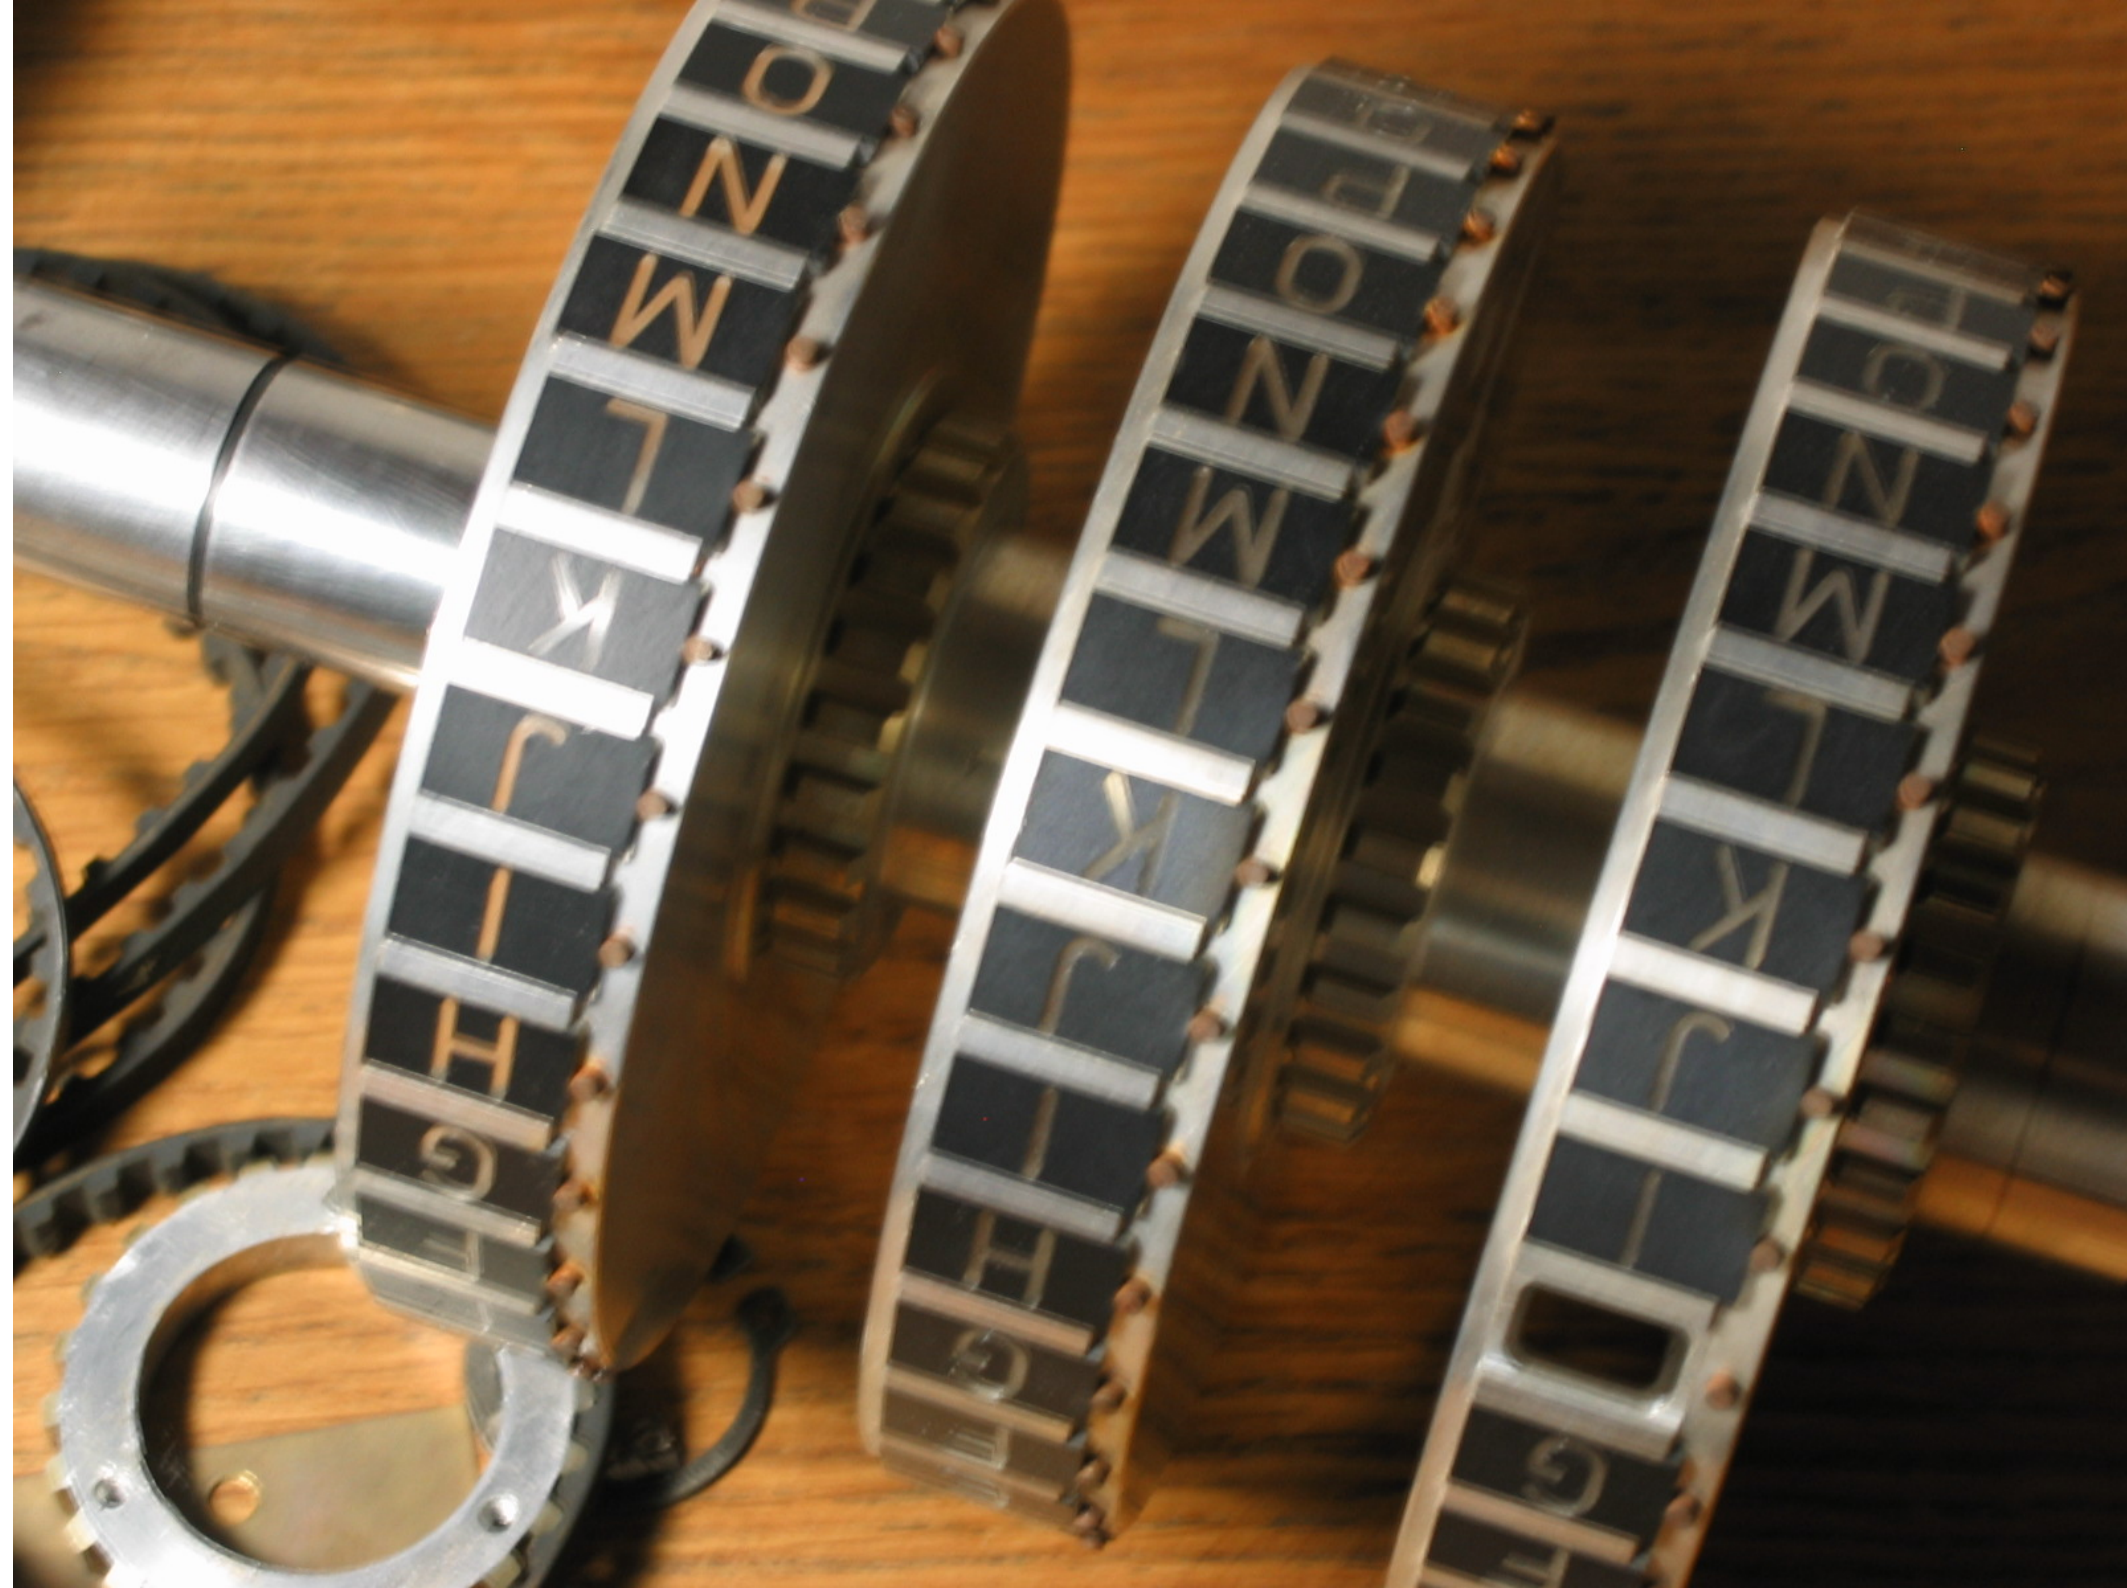


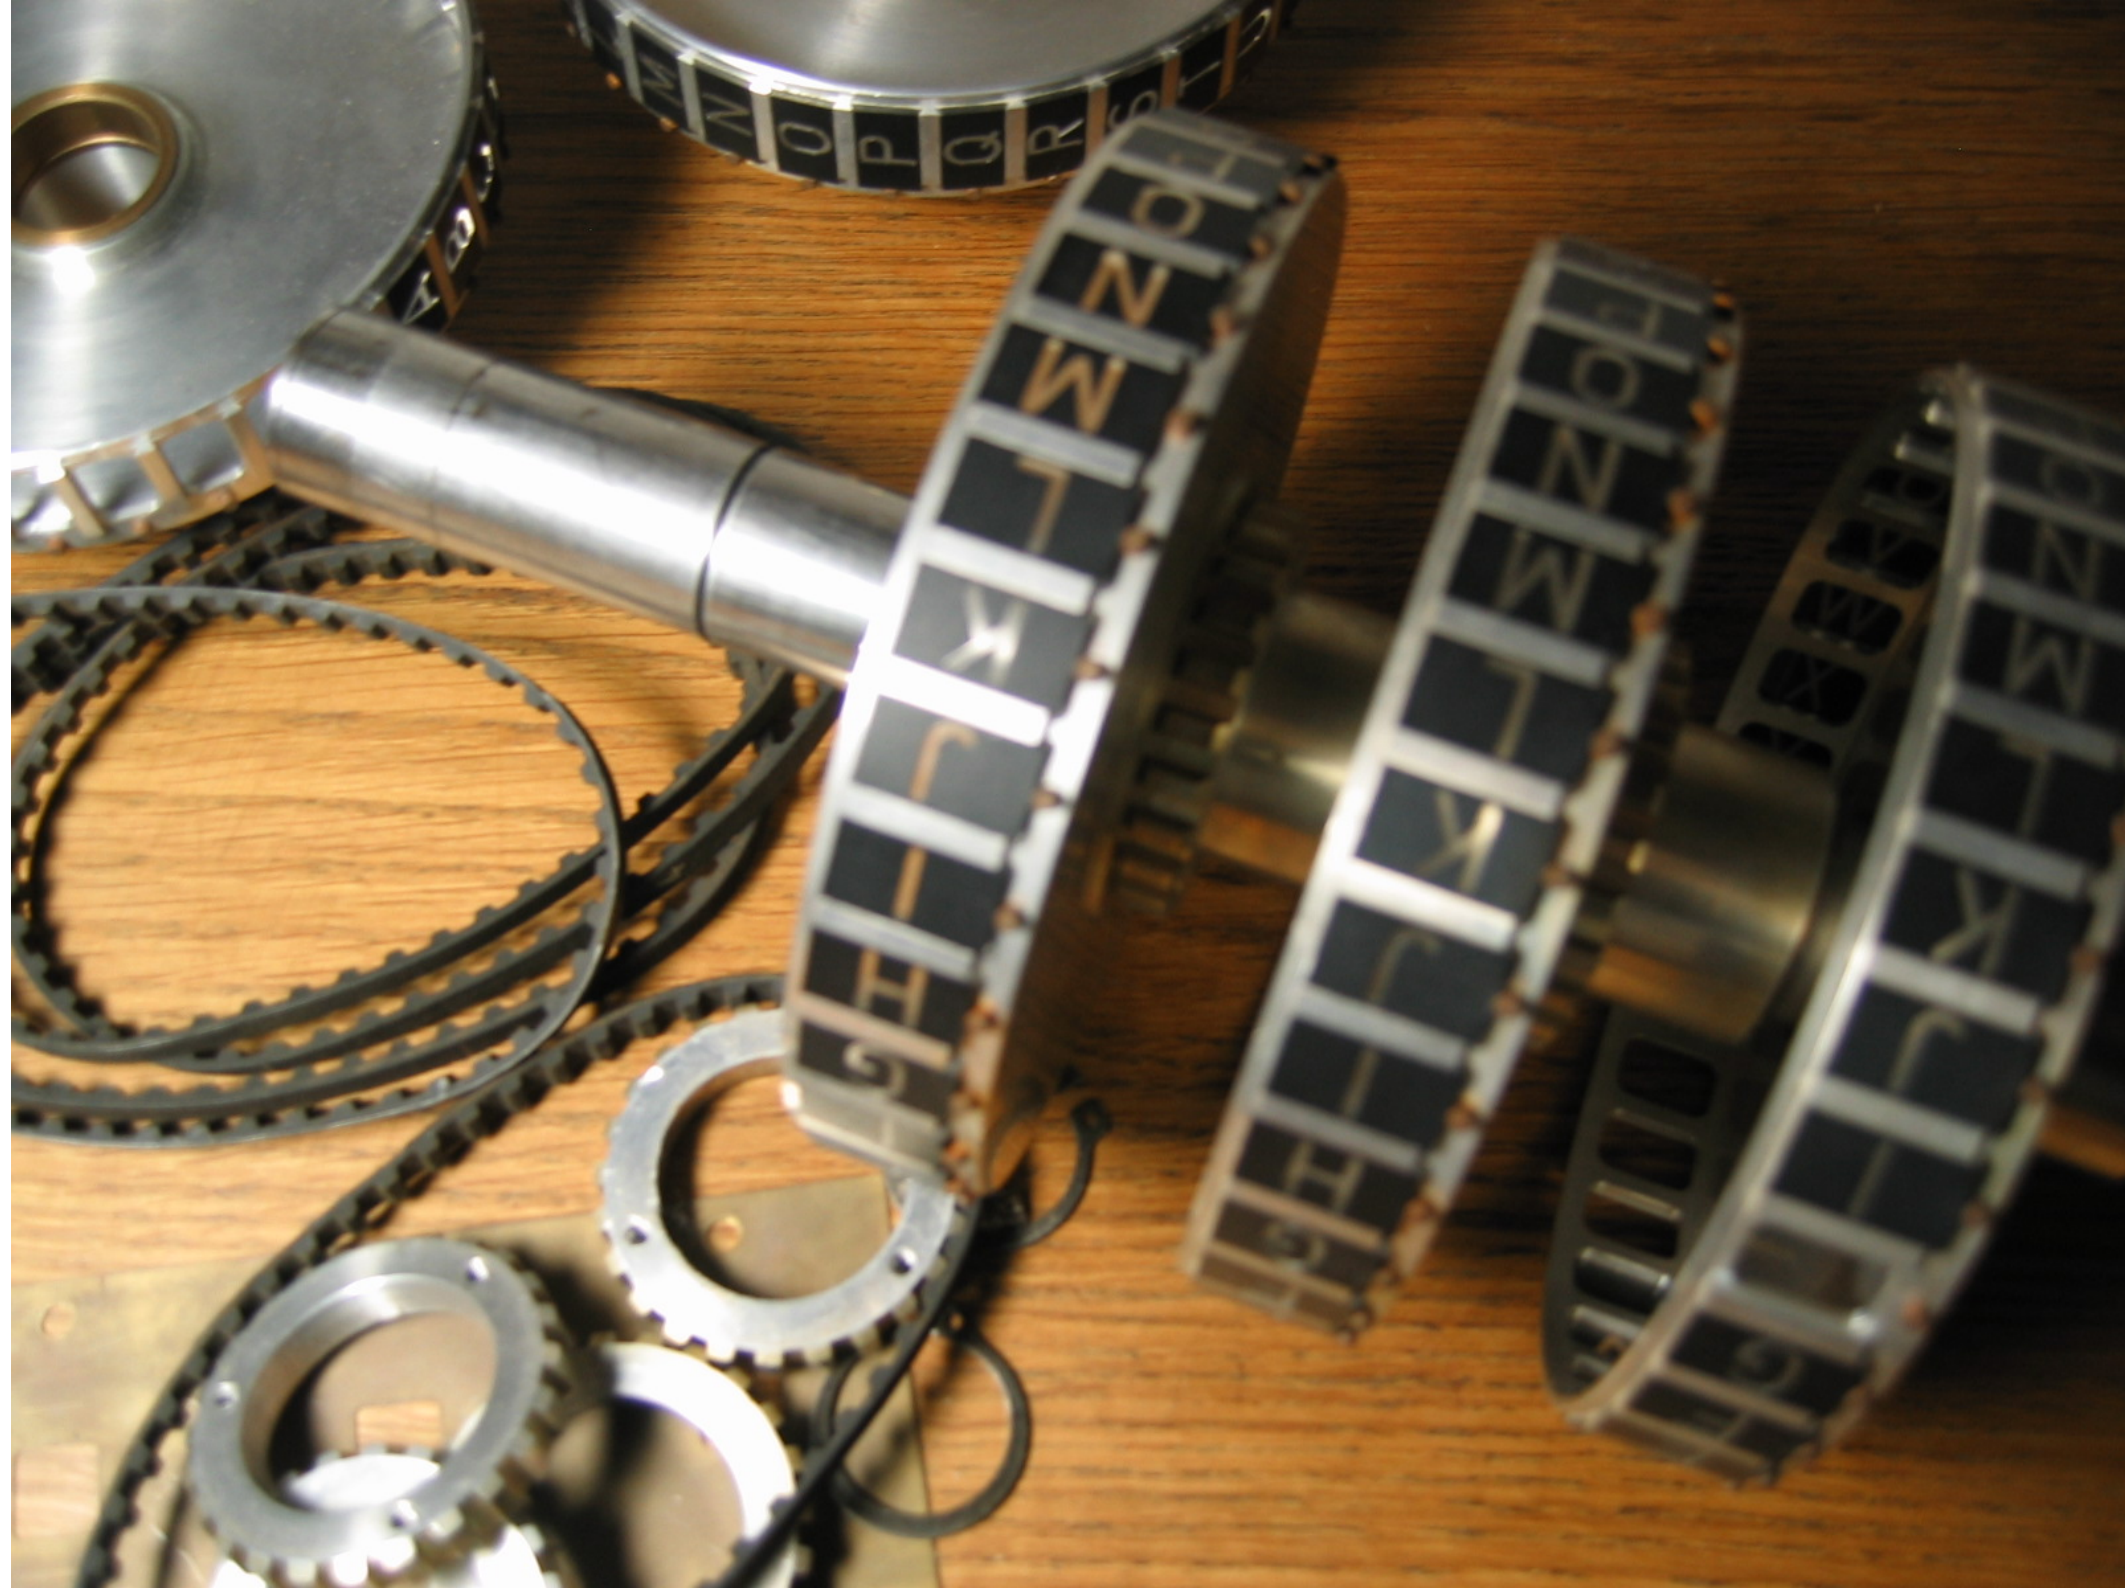

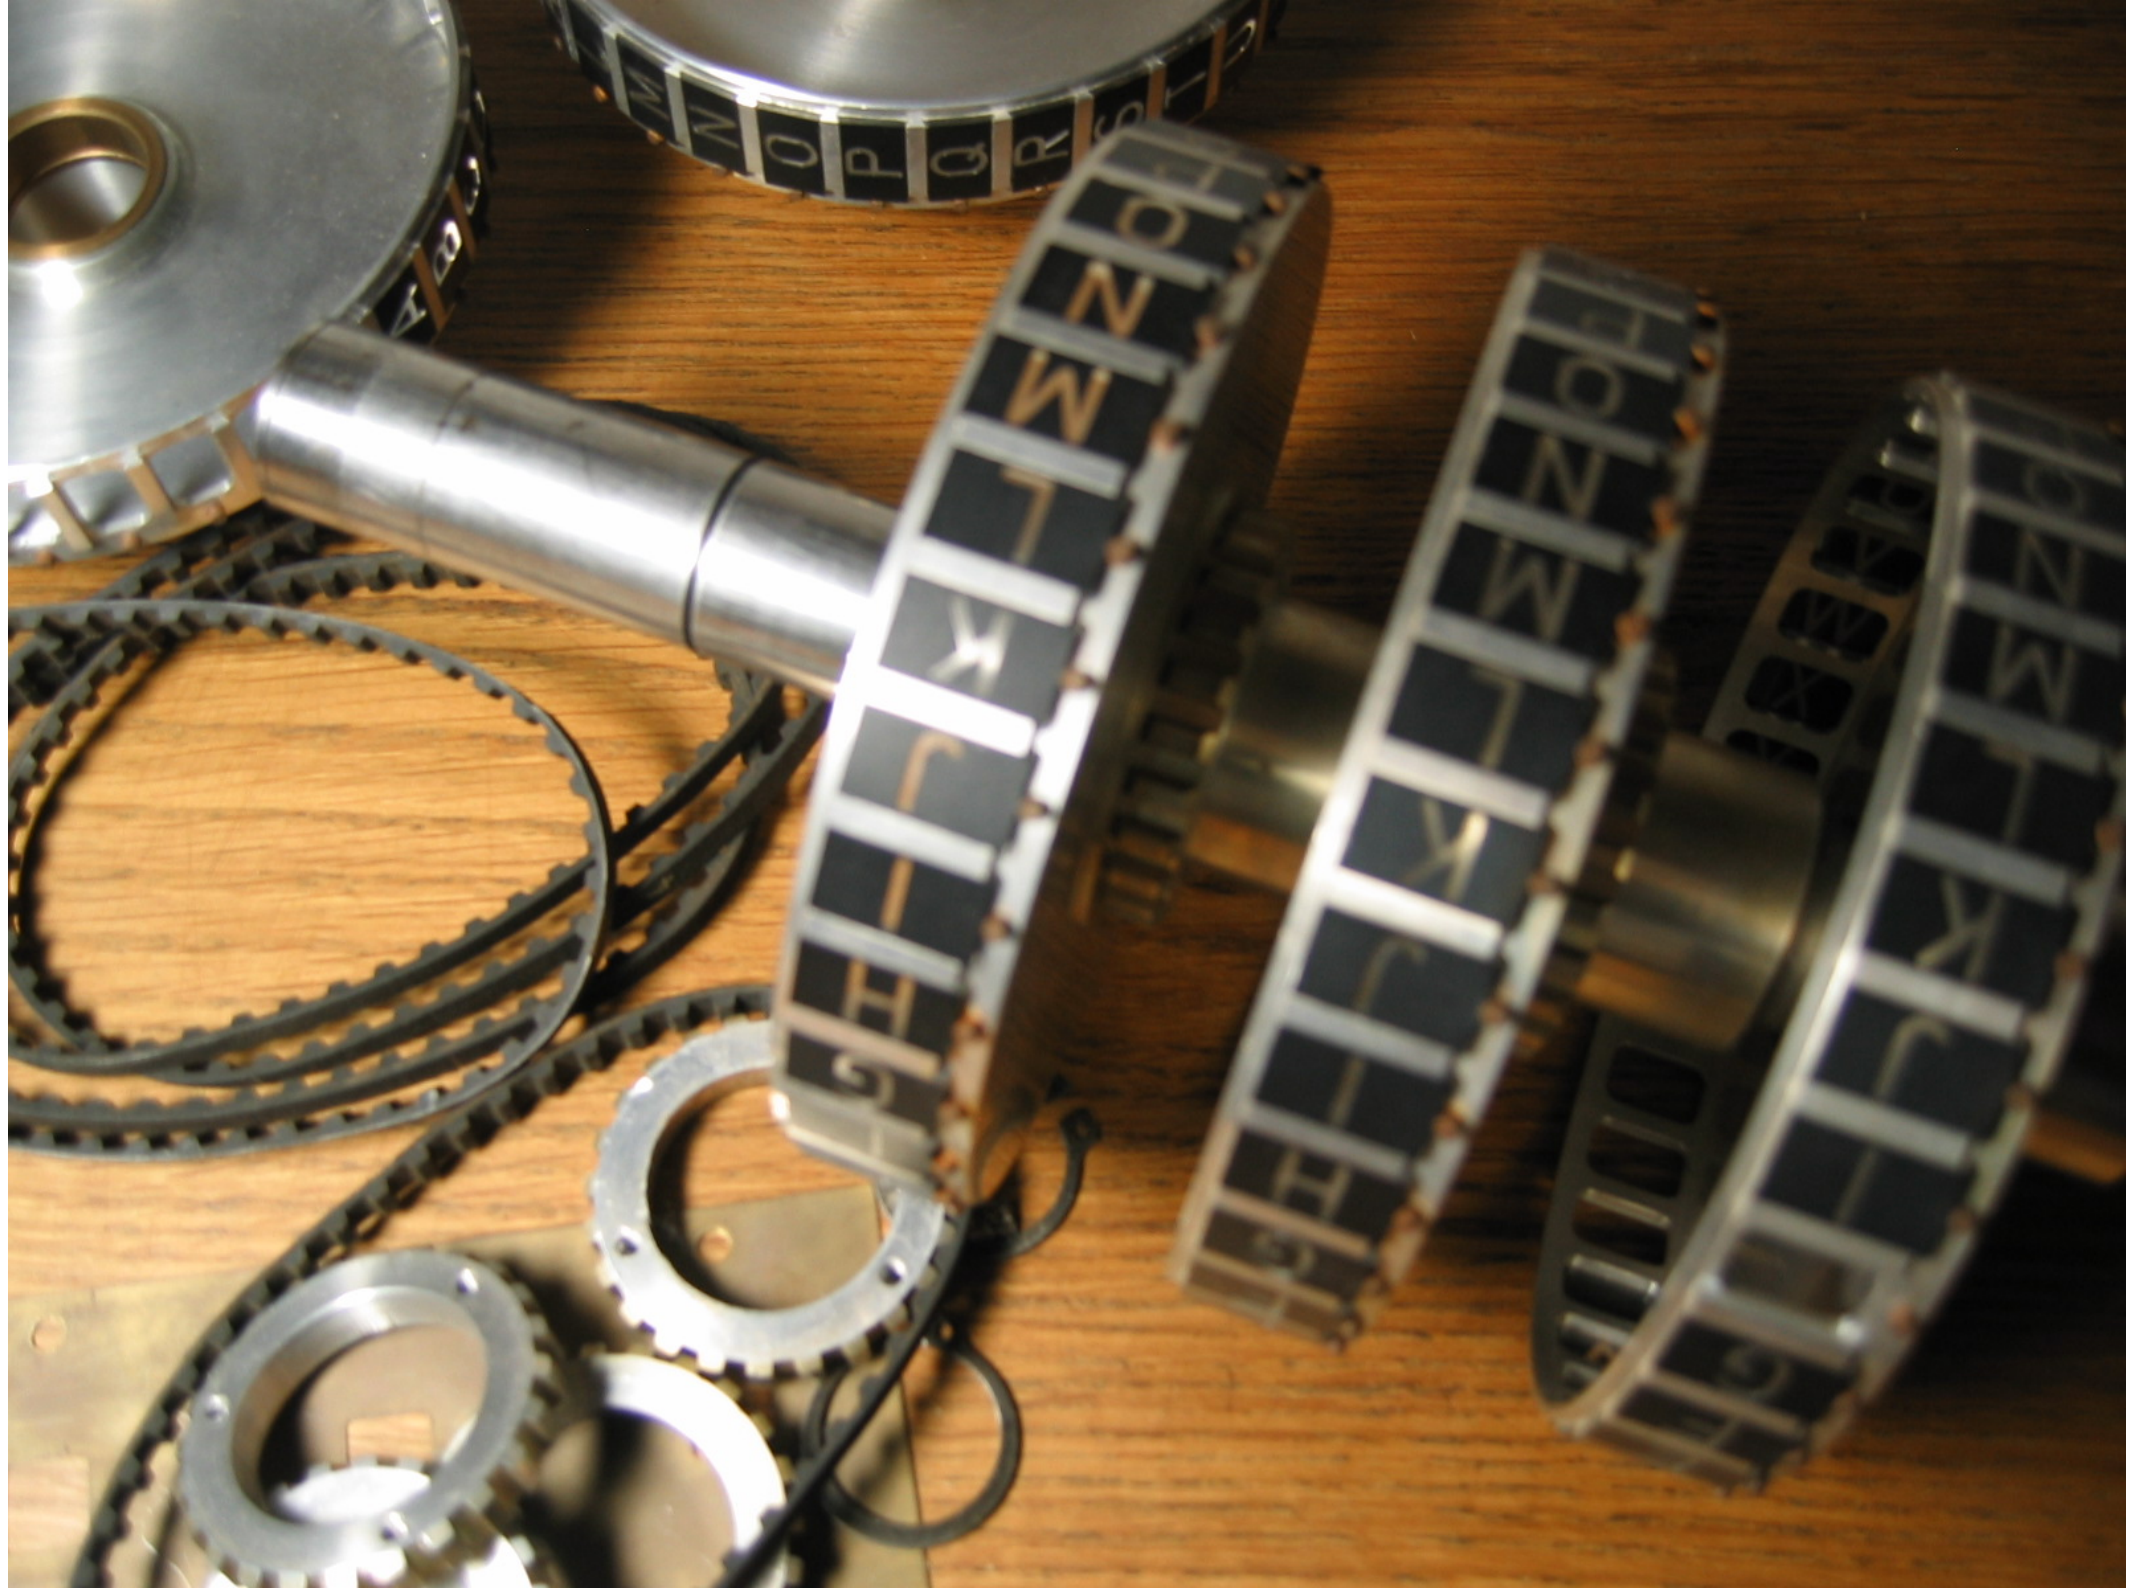



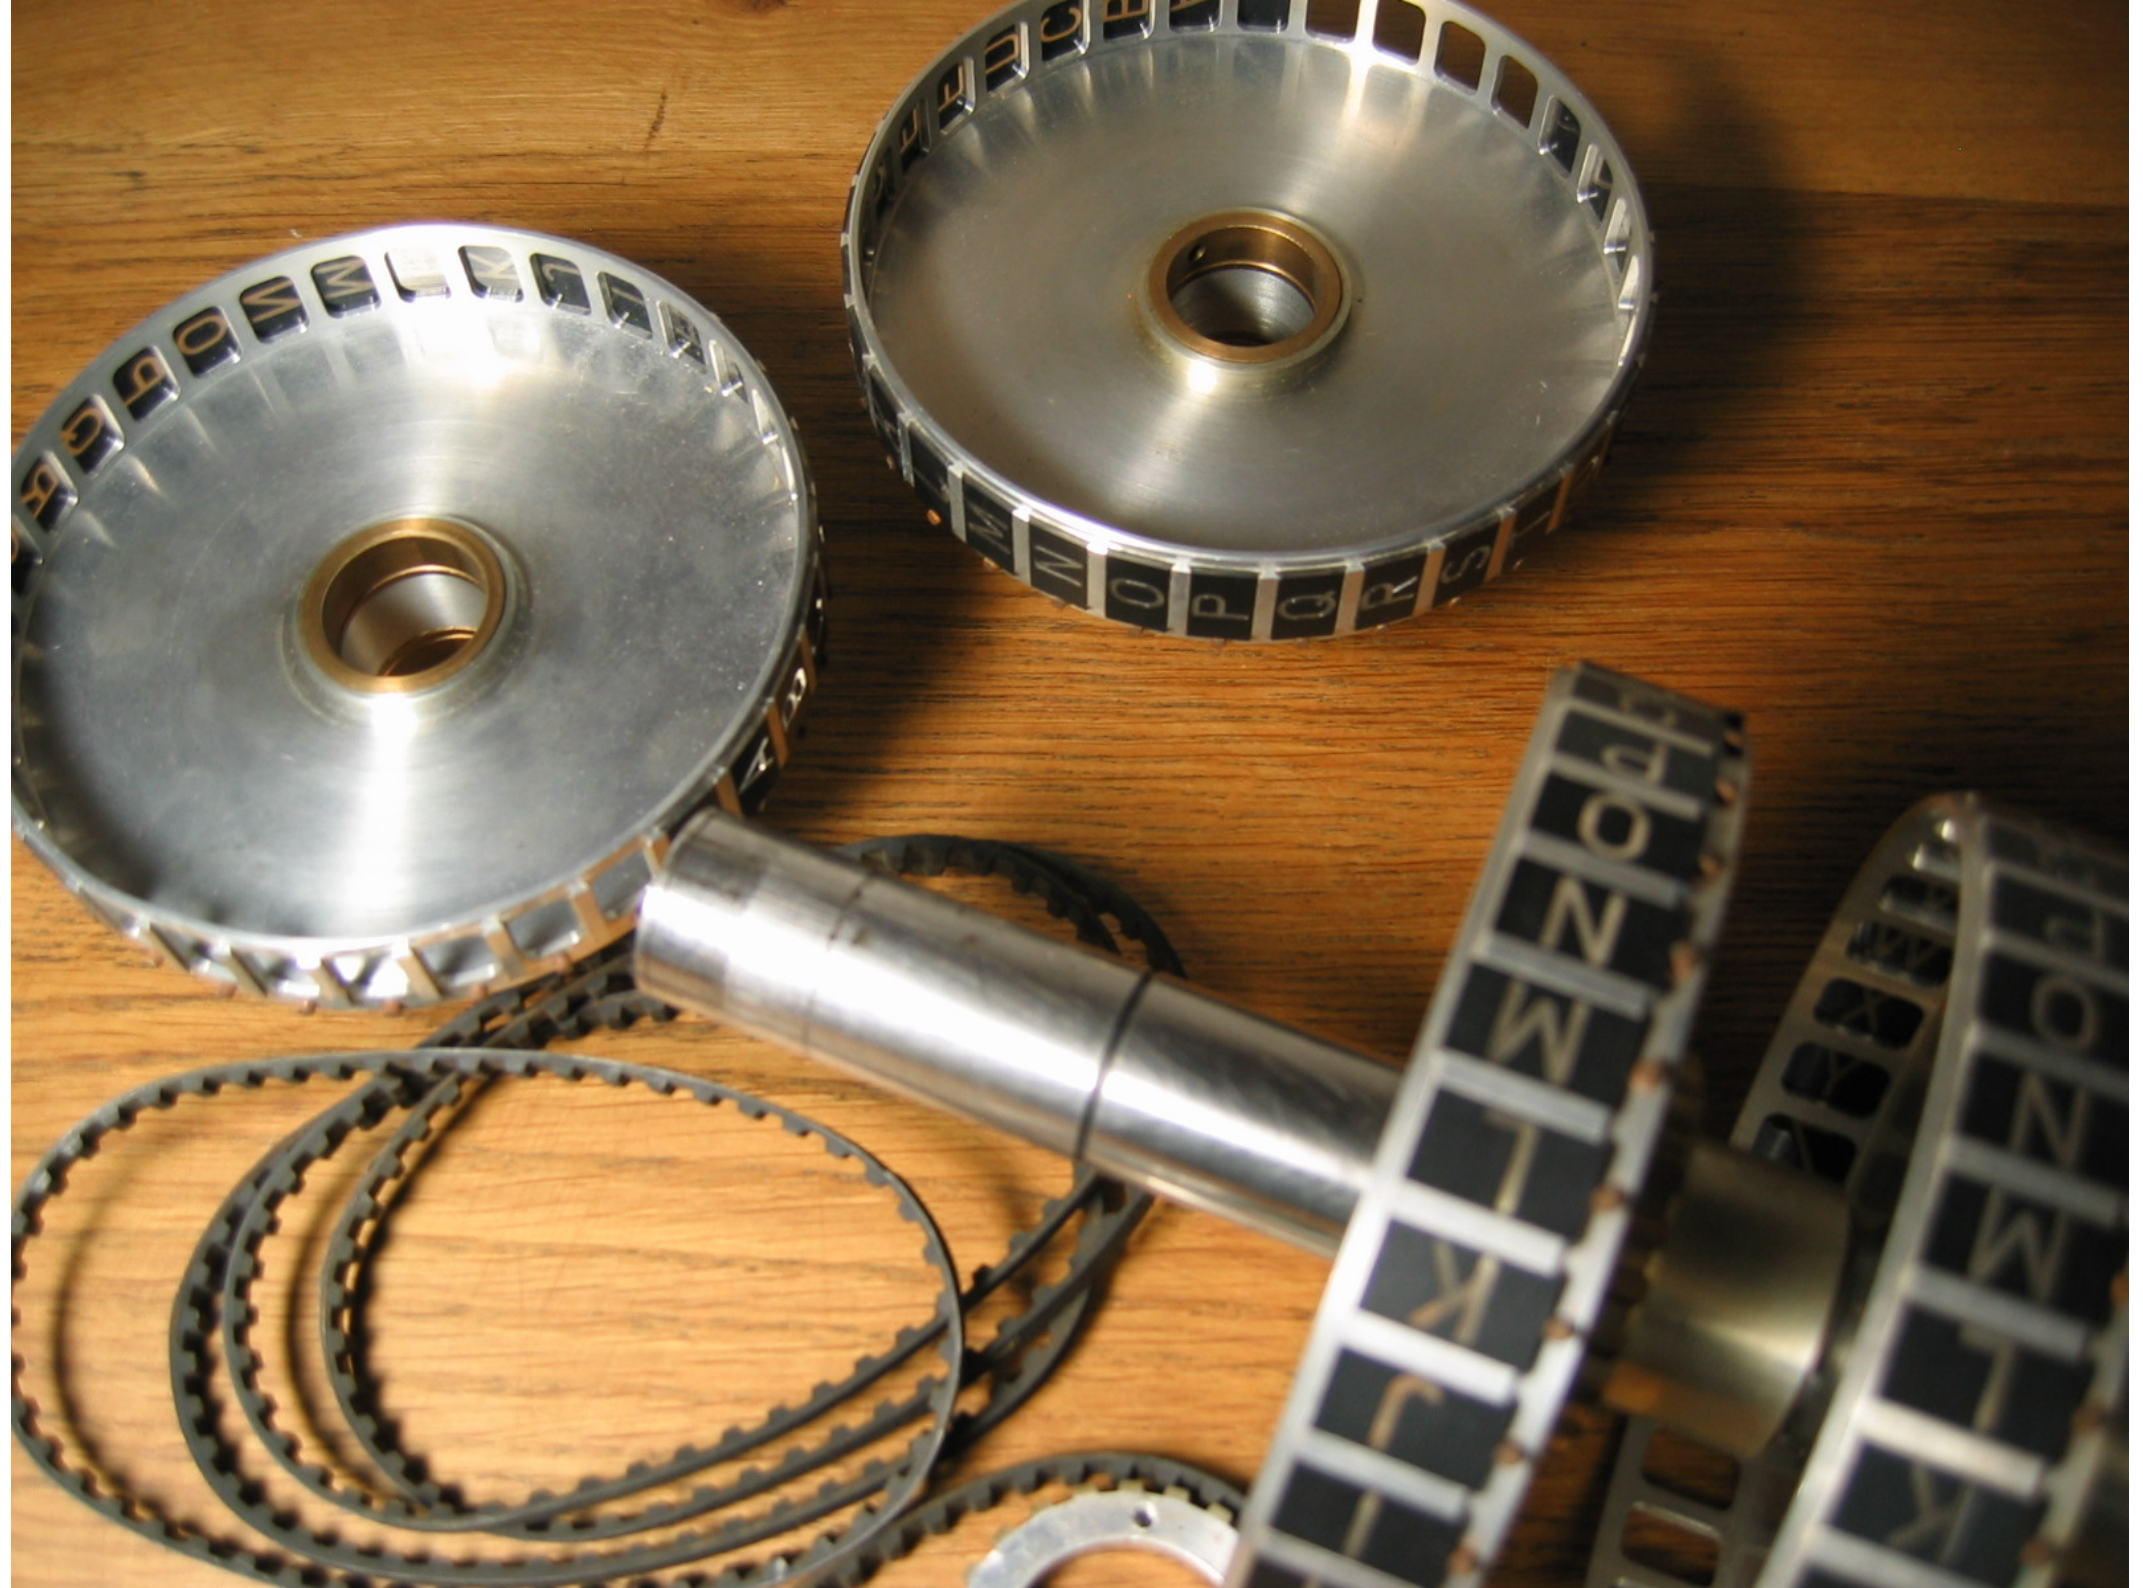

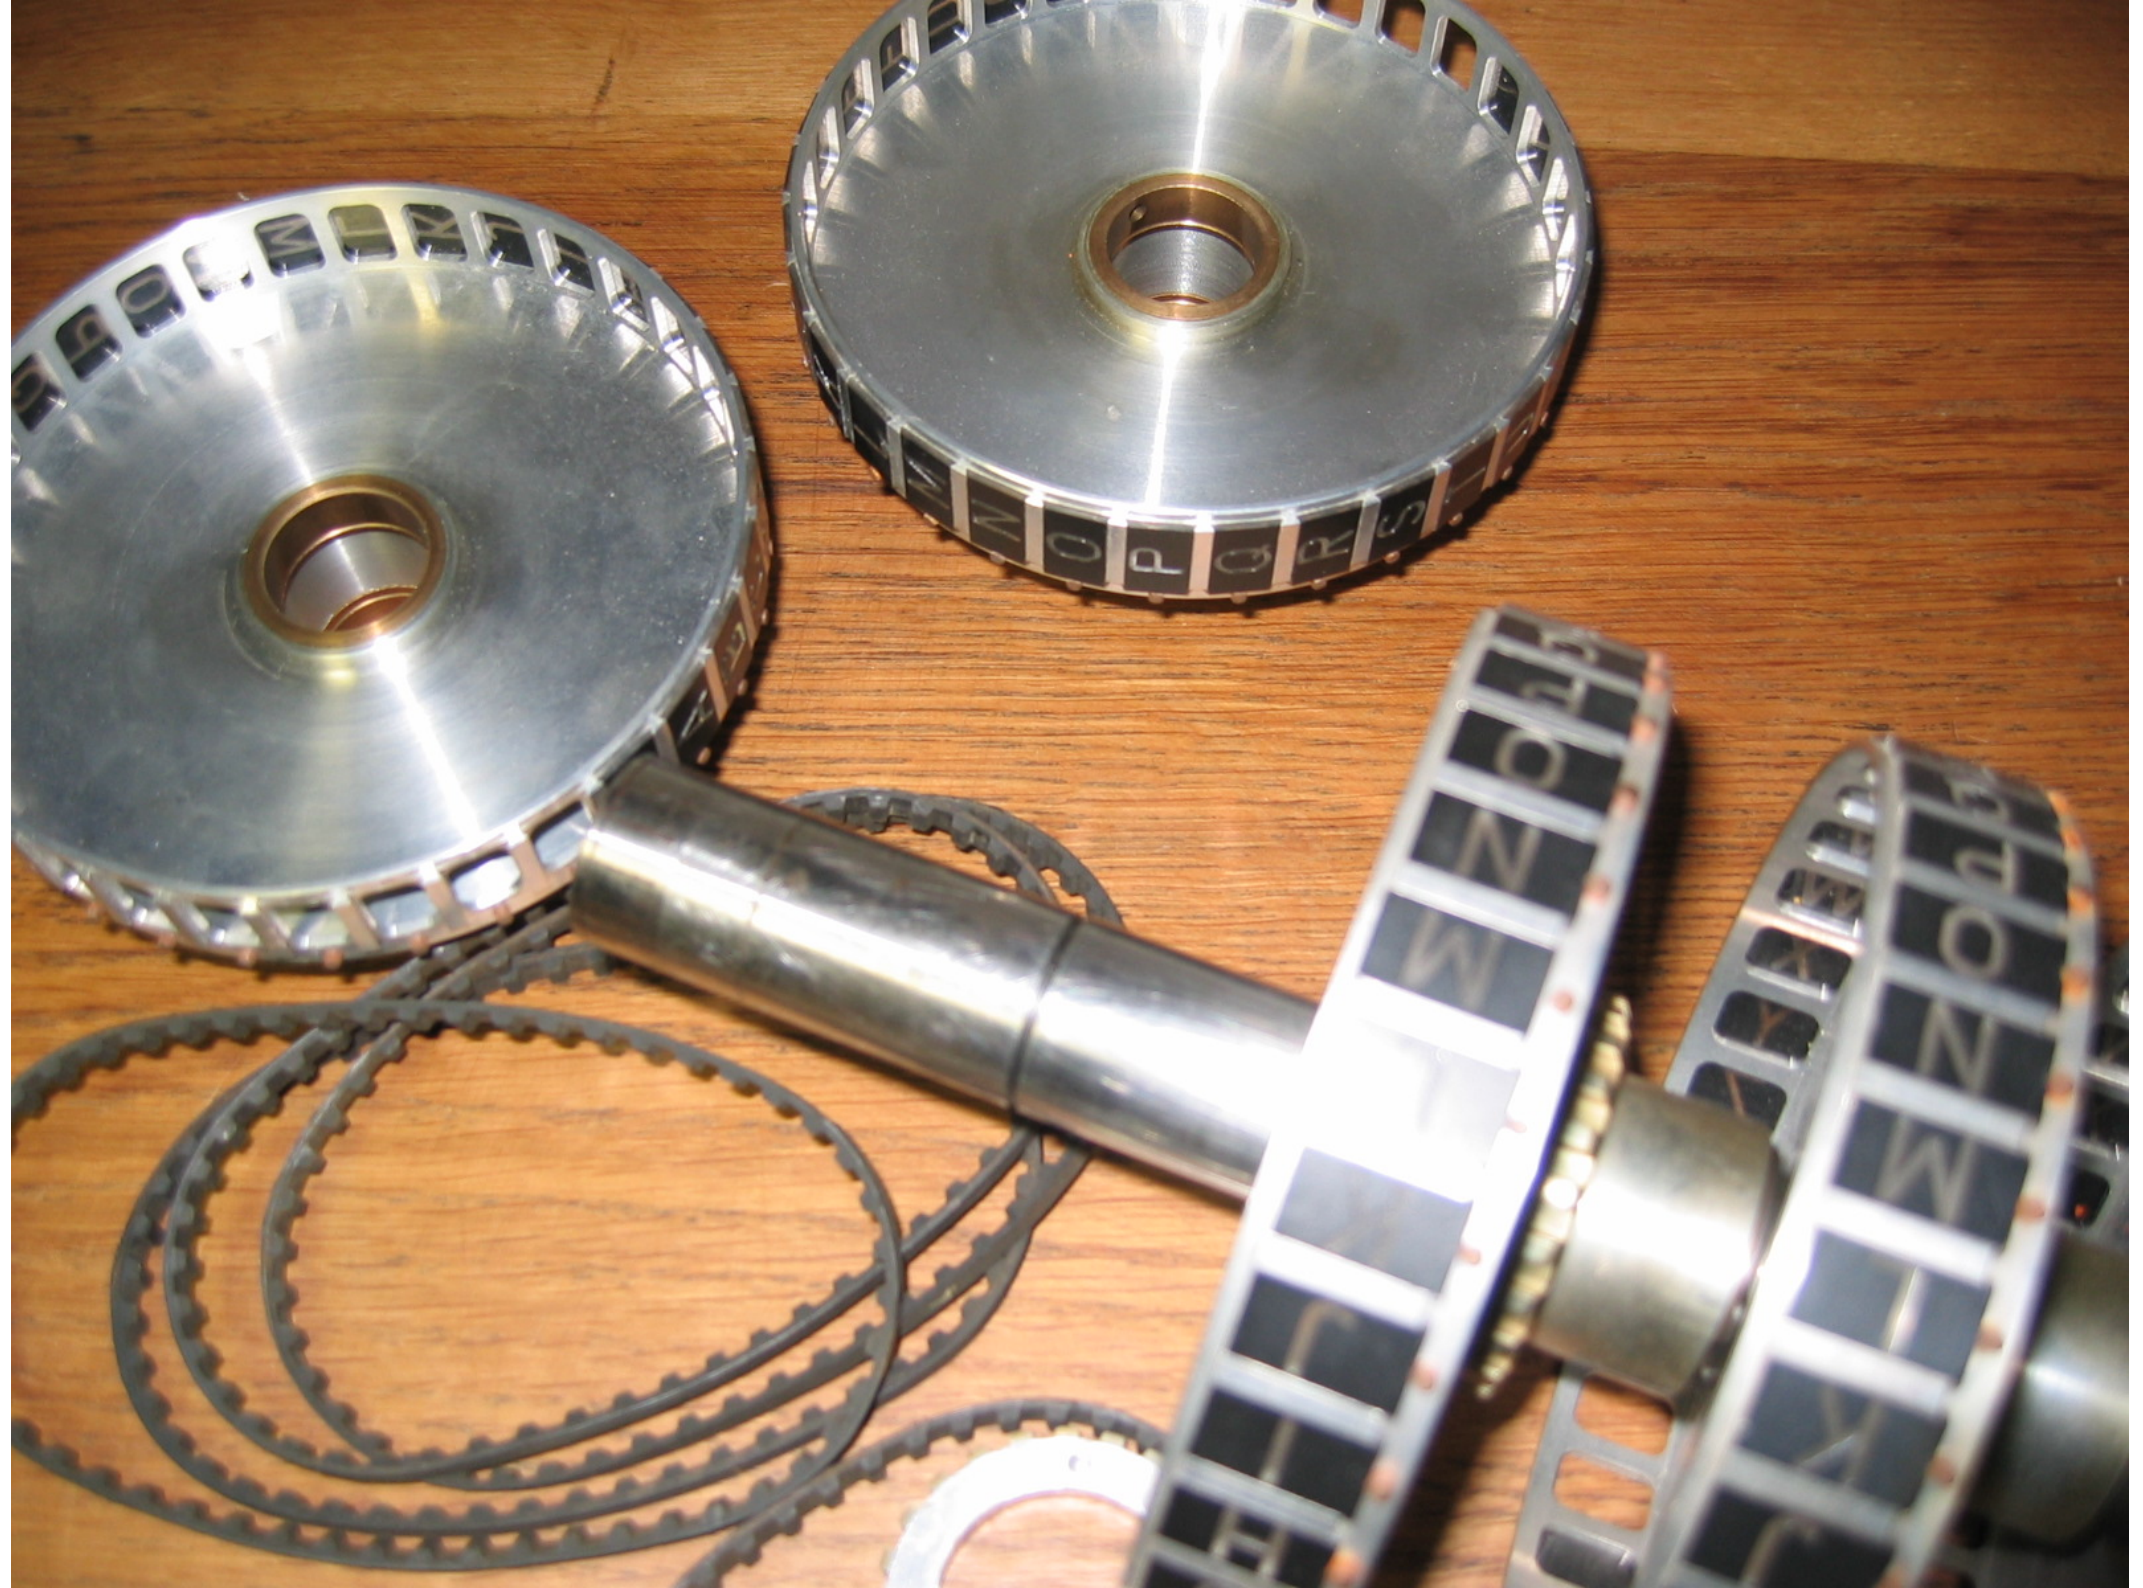























NEUBERGER
geprüft:

























































L	U	Q
A	K	O
F	M	R
Z	B	S
T	C	A
N	H	R
V	D	Y
































































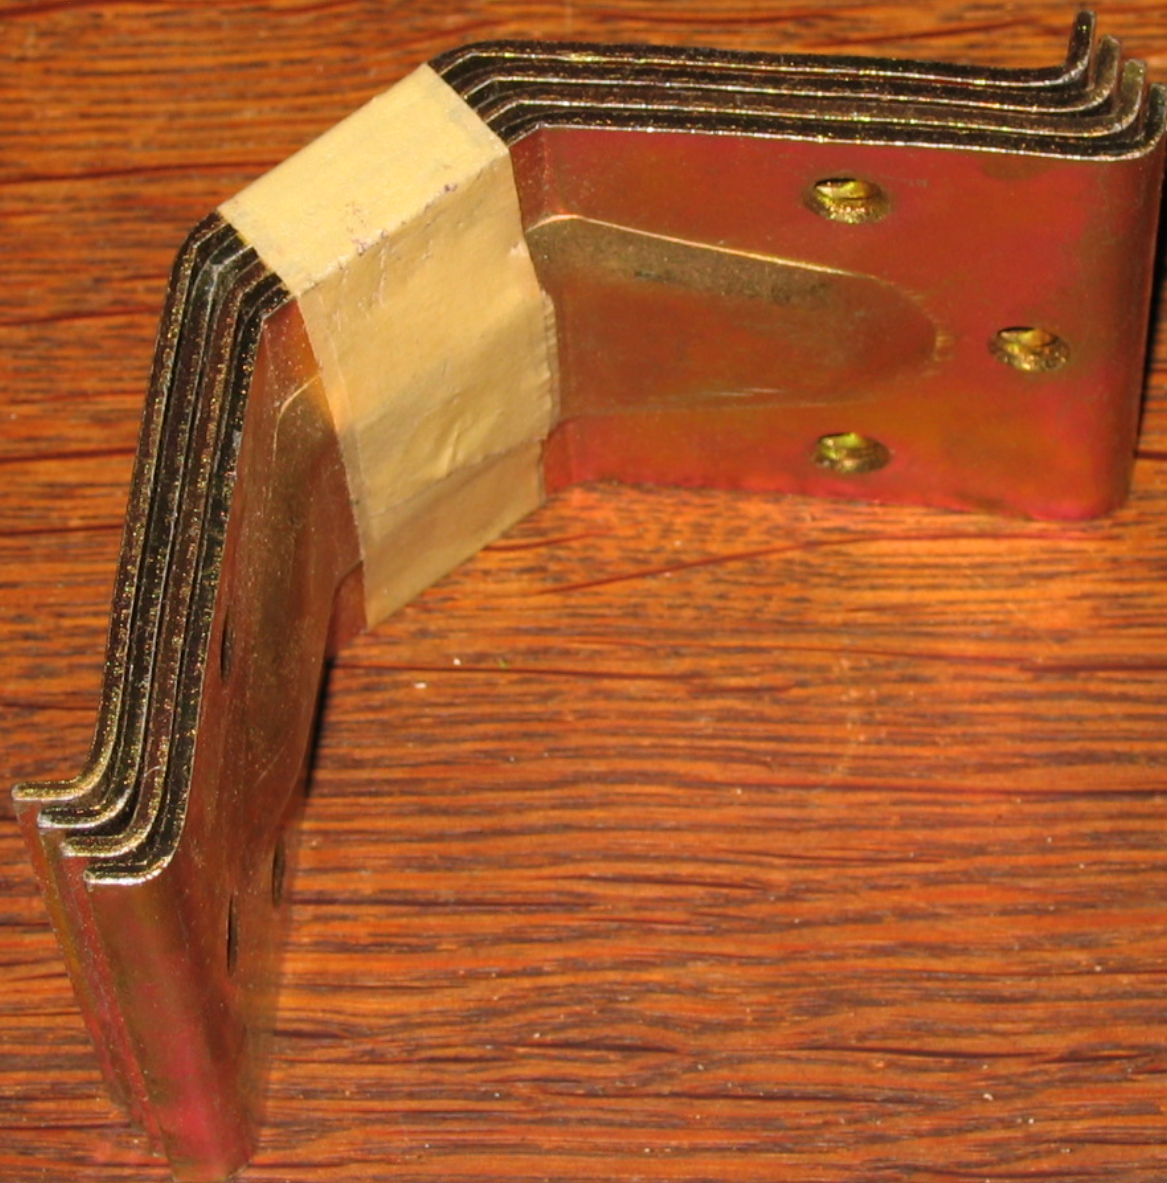

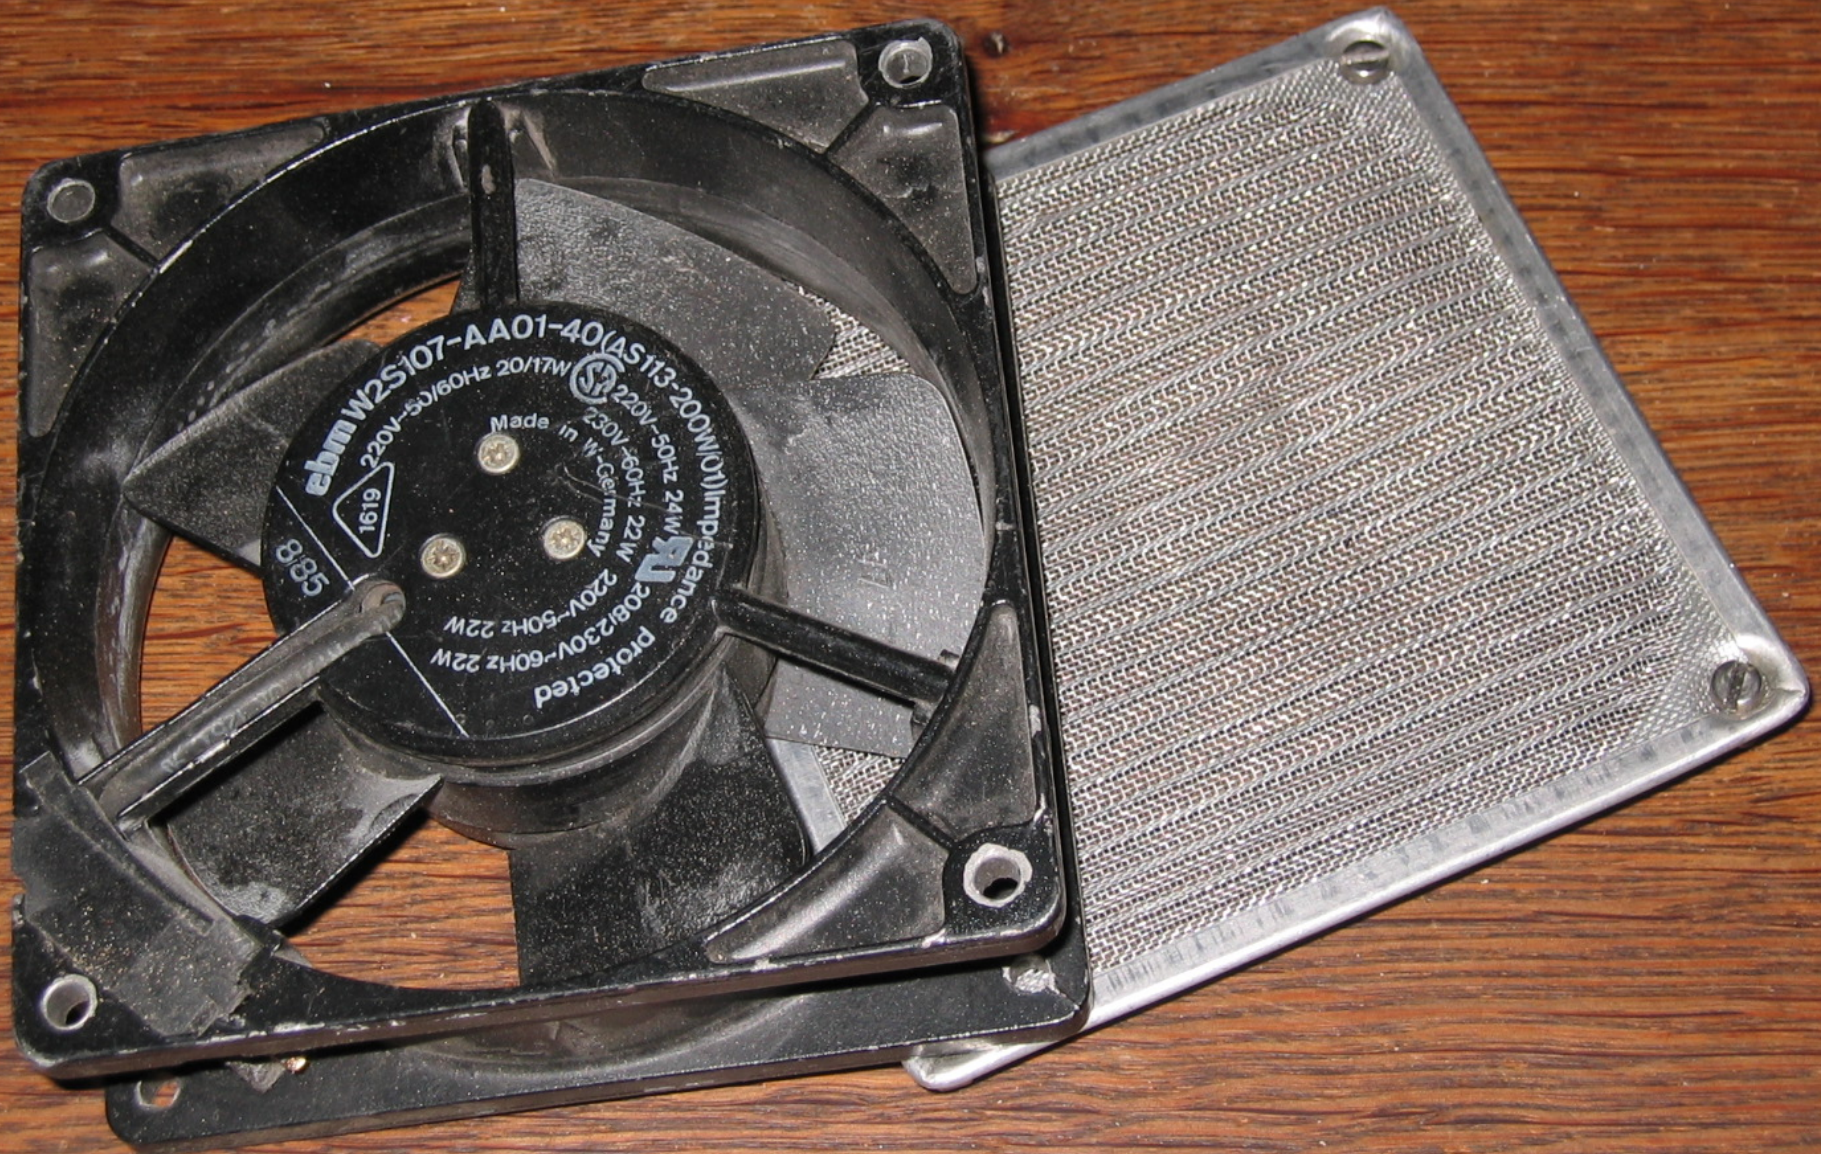


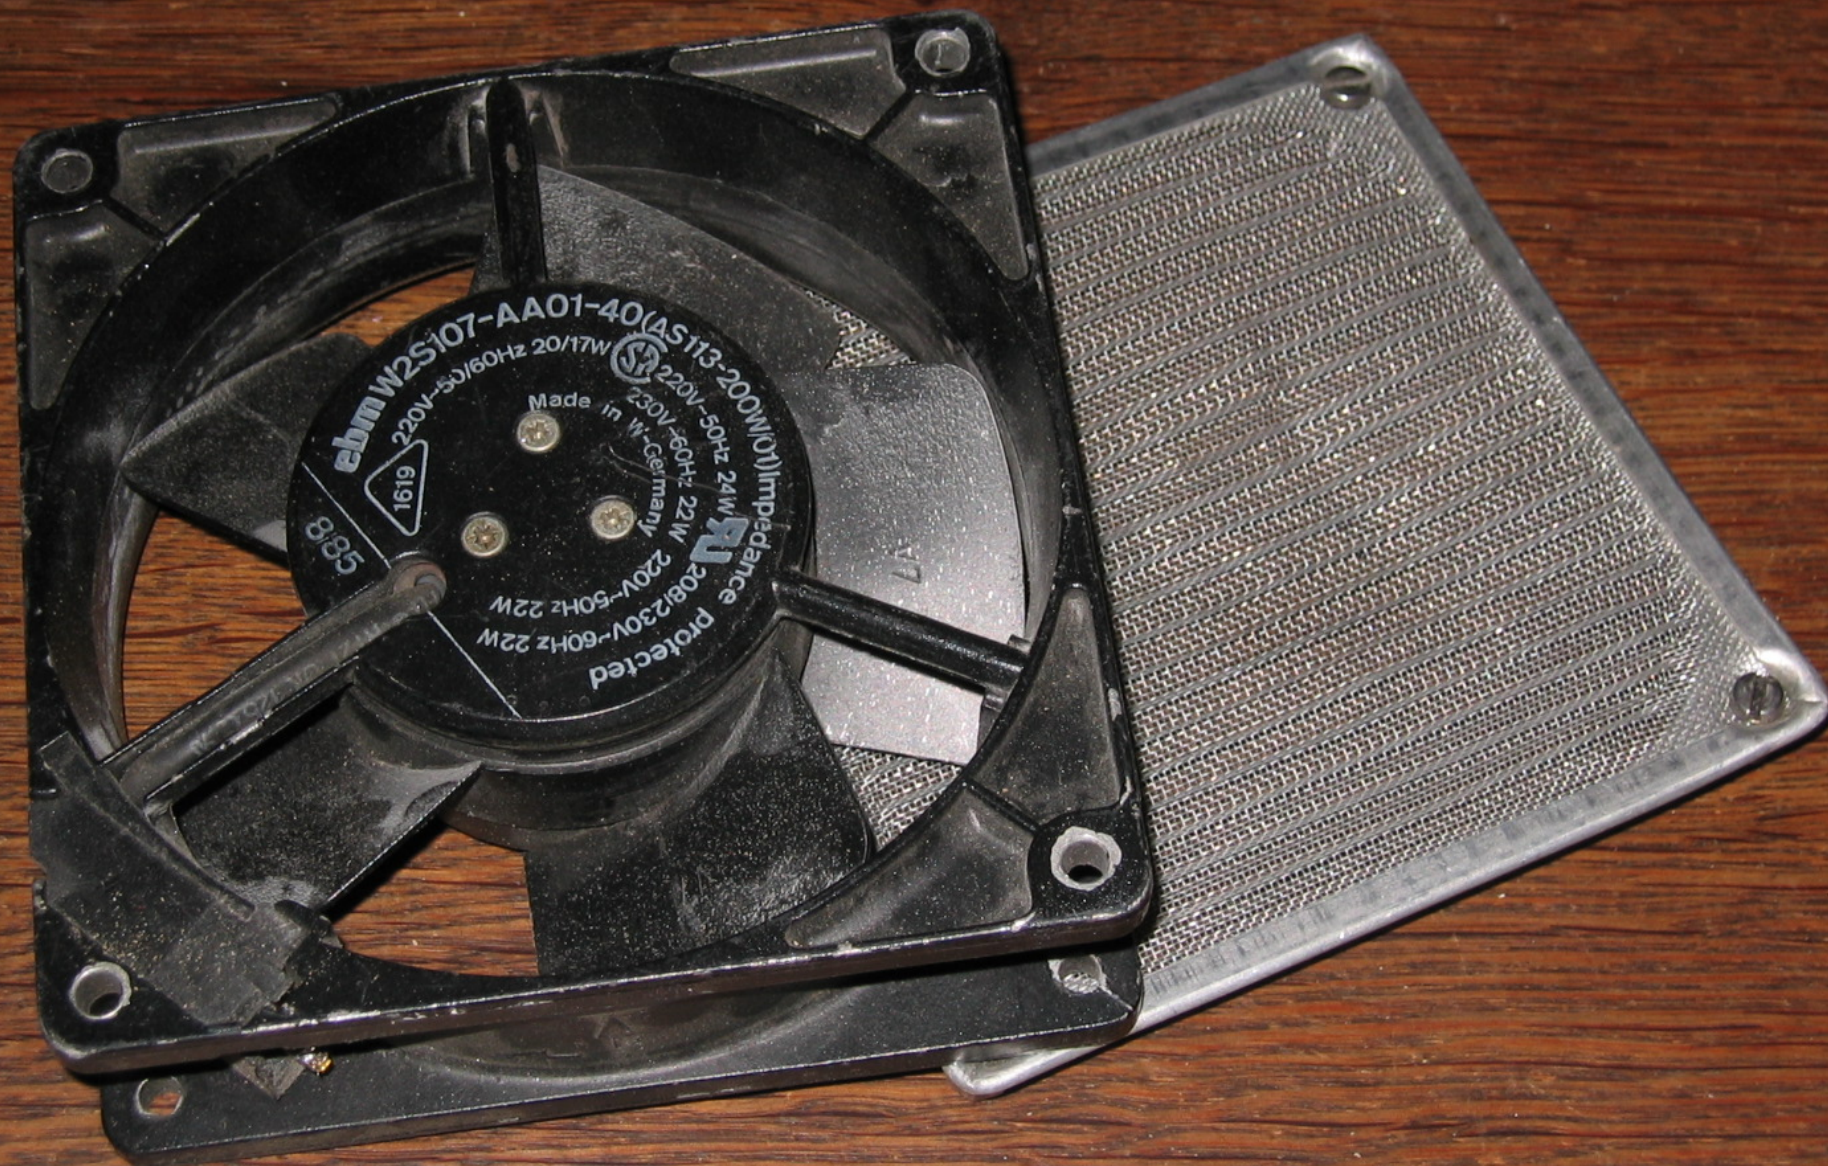









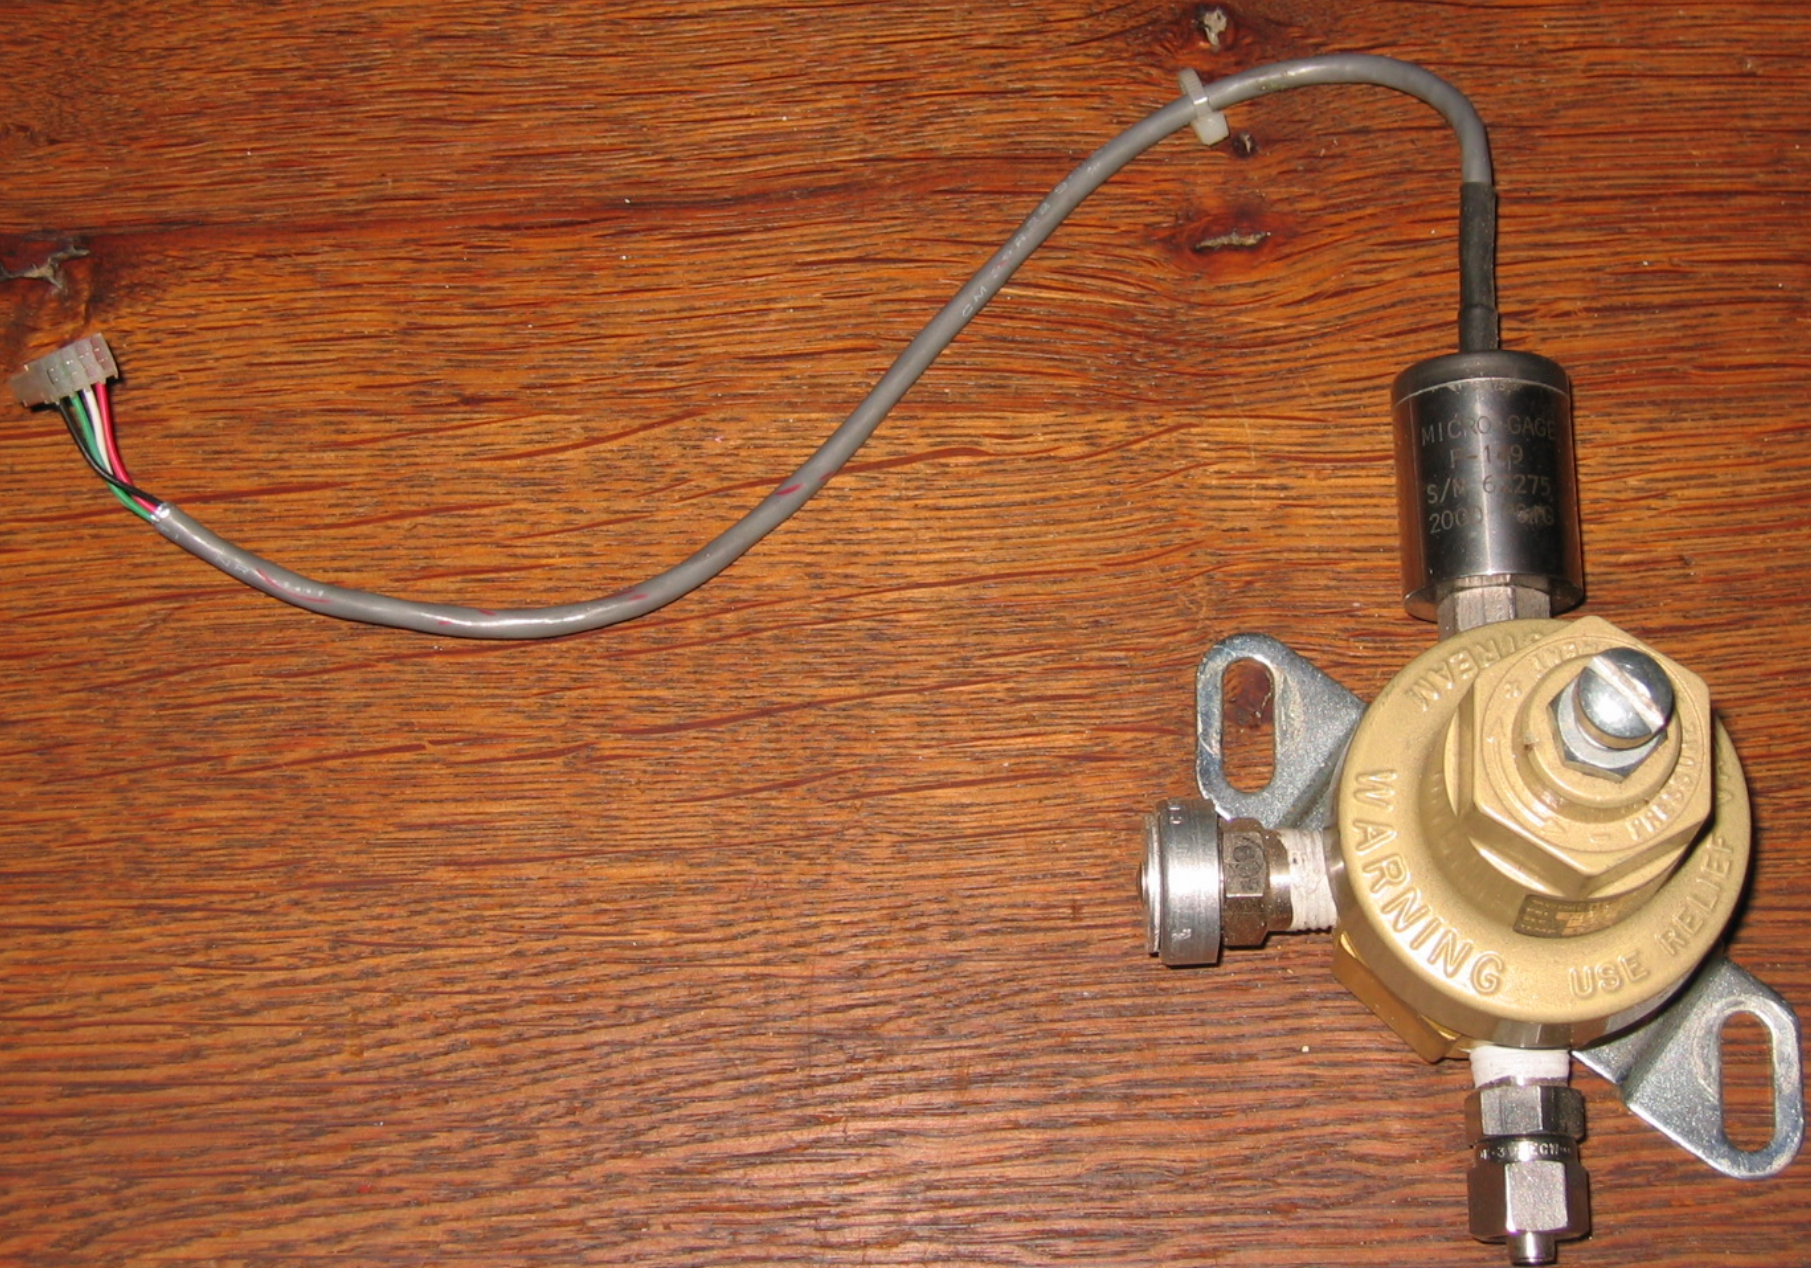

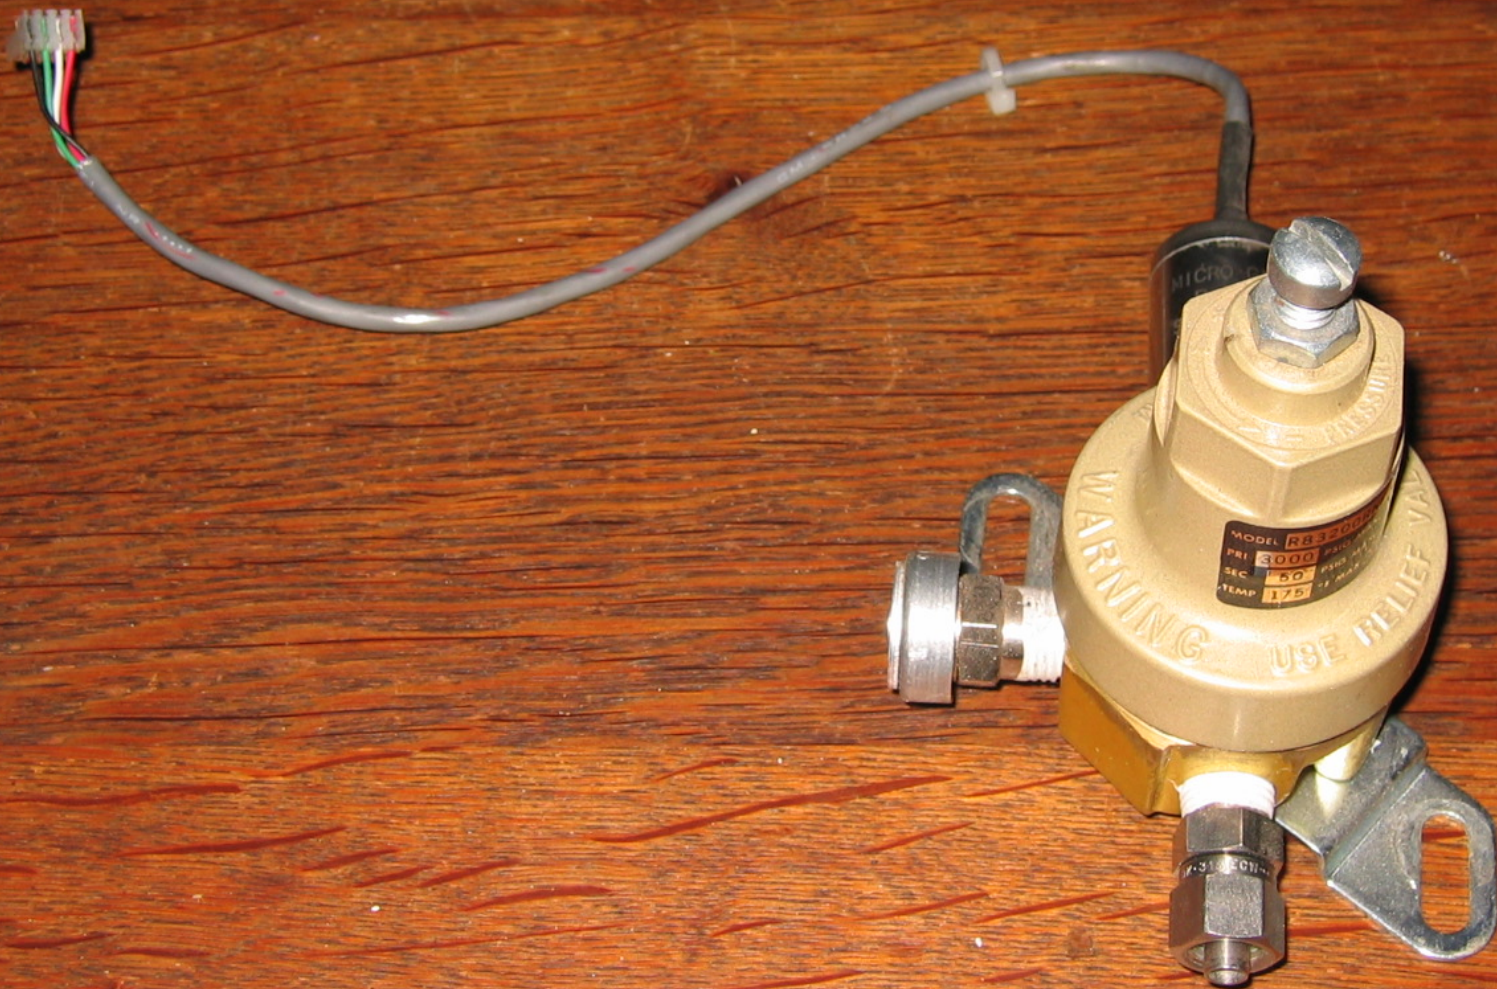

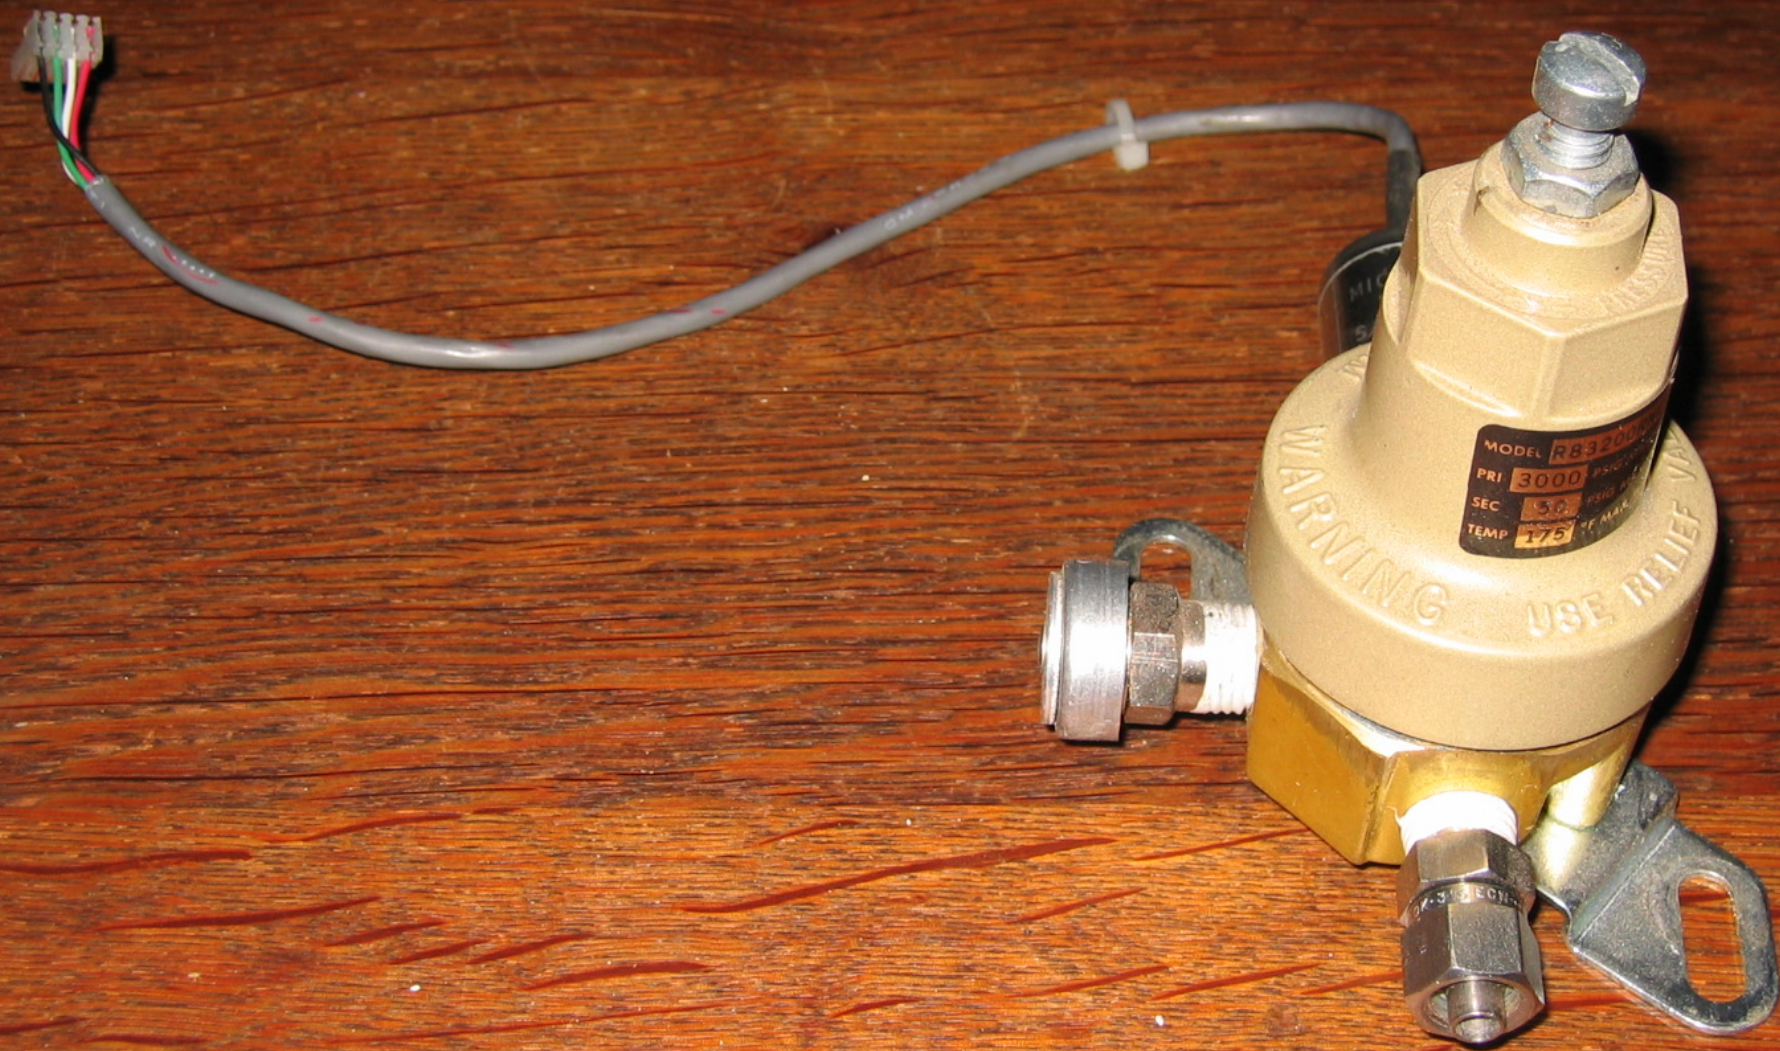



















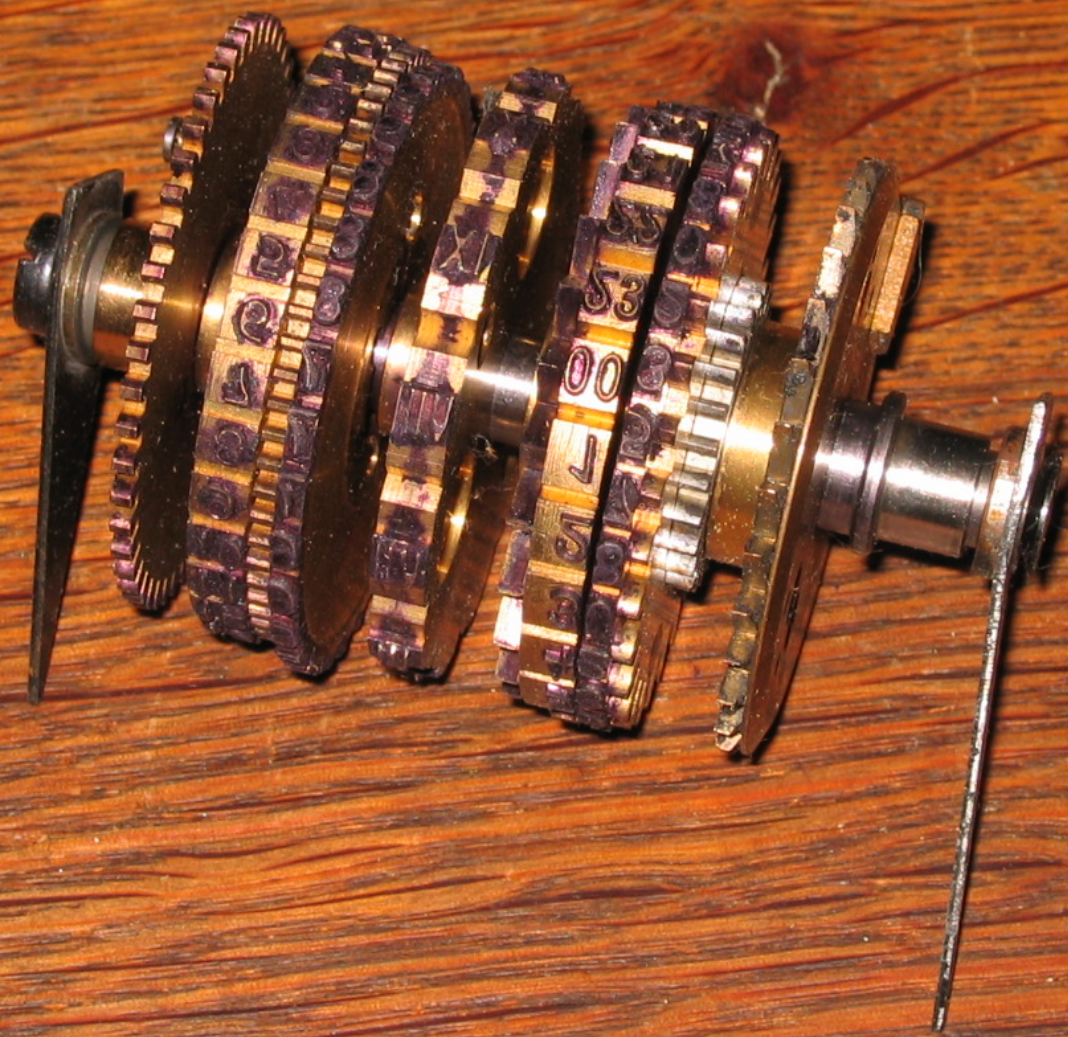

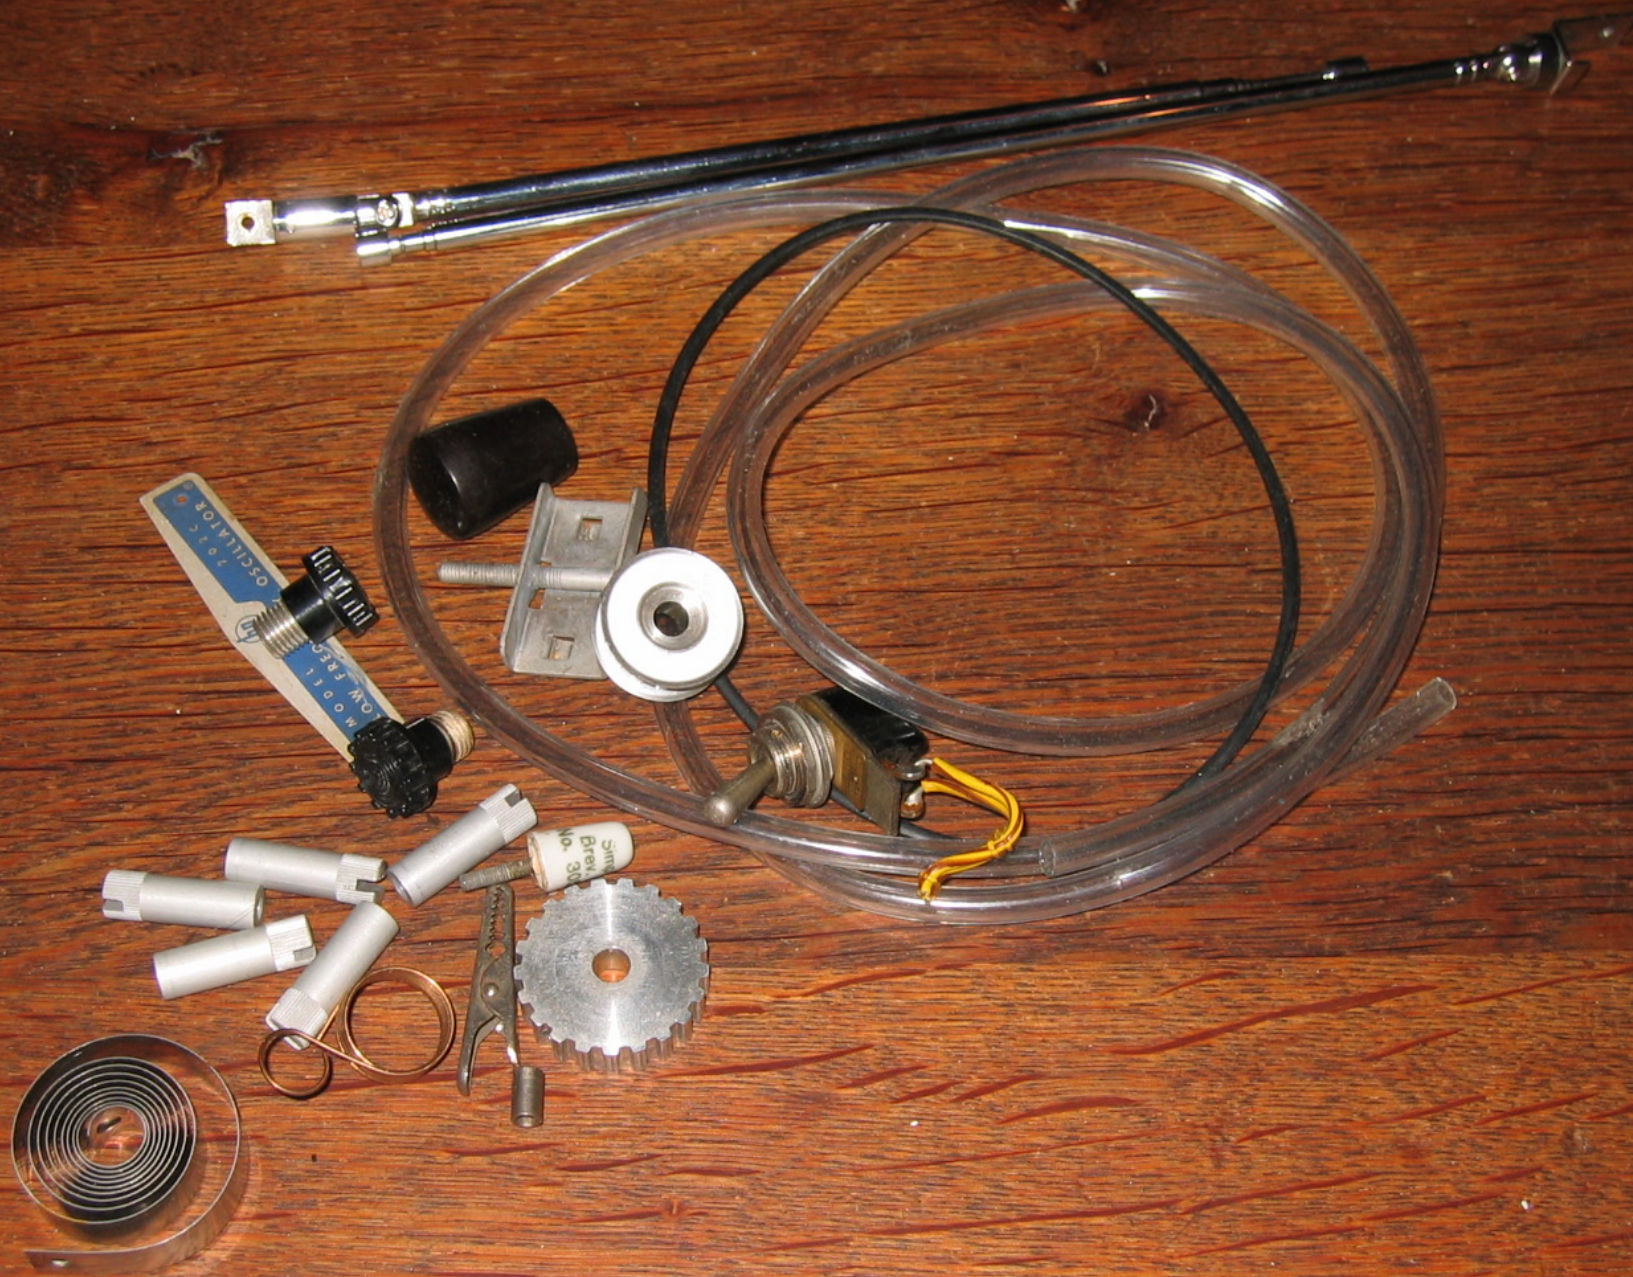

















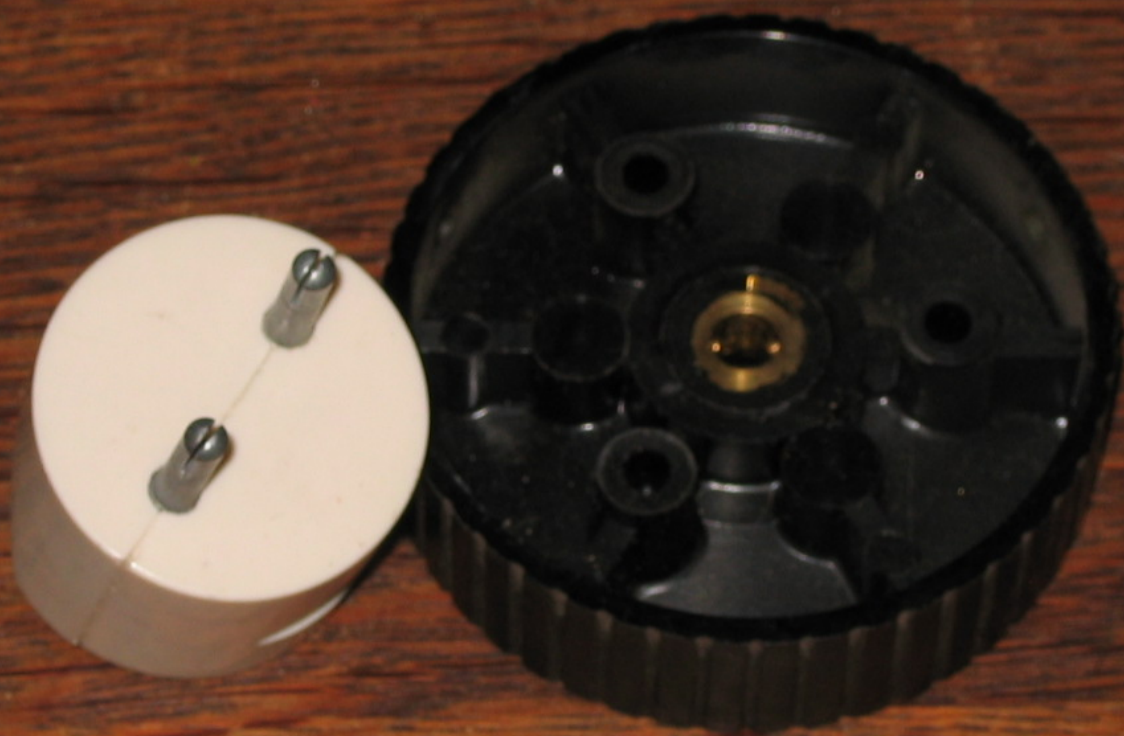





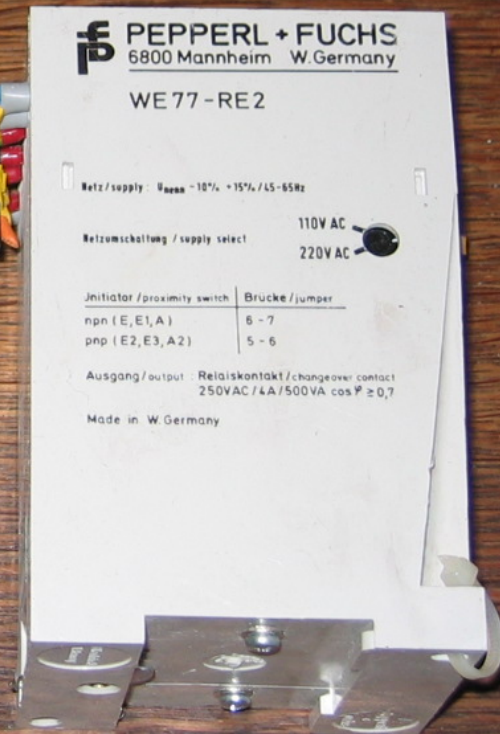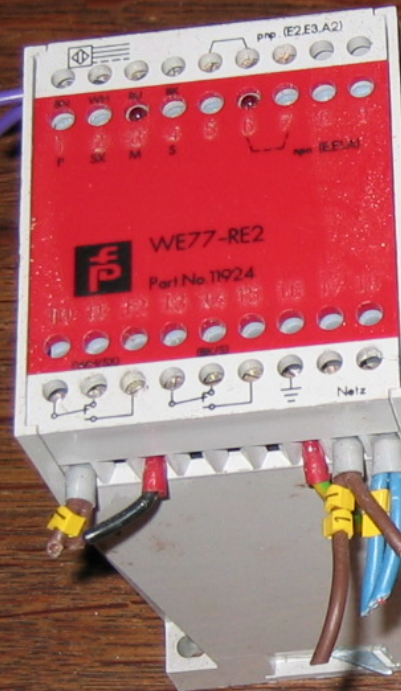

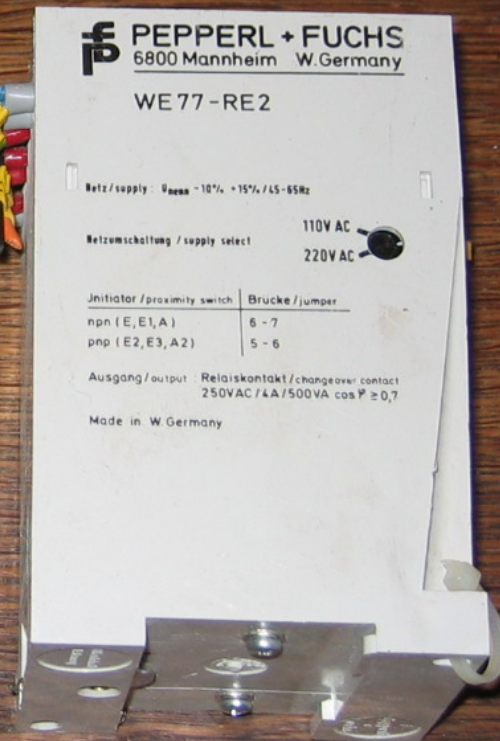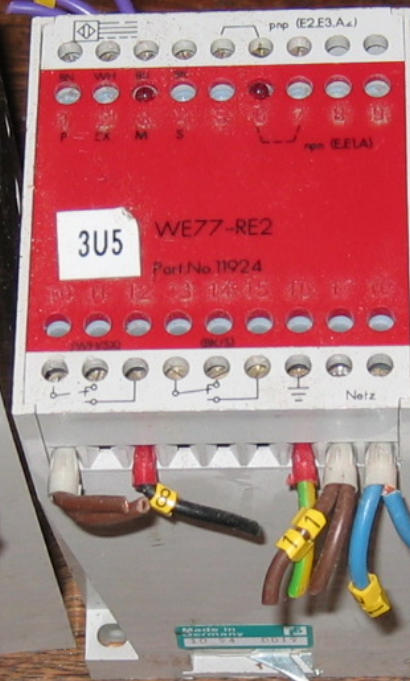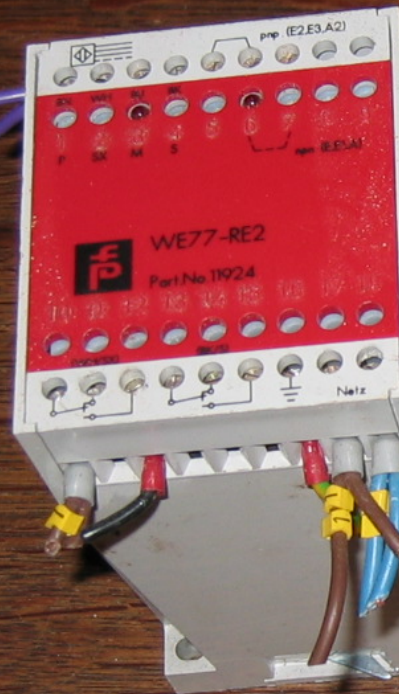

PEPPERL + FUCHS
6800 Mannheim W. Germany

WE77-RE2

Netz / supply: $U_{\text{Nenn}} -10\% \dots +15\% / 45-65\text{Hz}$

Netzumschaltung / supply select


110V AC


220V AC


Initiator / proximity switch	Brücke / jumper
npn (E, E1, A)	6 - 7
pnp (E2, E3, A2)	5 - 6


Ausgang / output: Relaiskontakt / changeover contact
250VAC / 4A / 500VA $\cos \varphi \geq 0,7$

Made in W. Germany

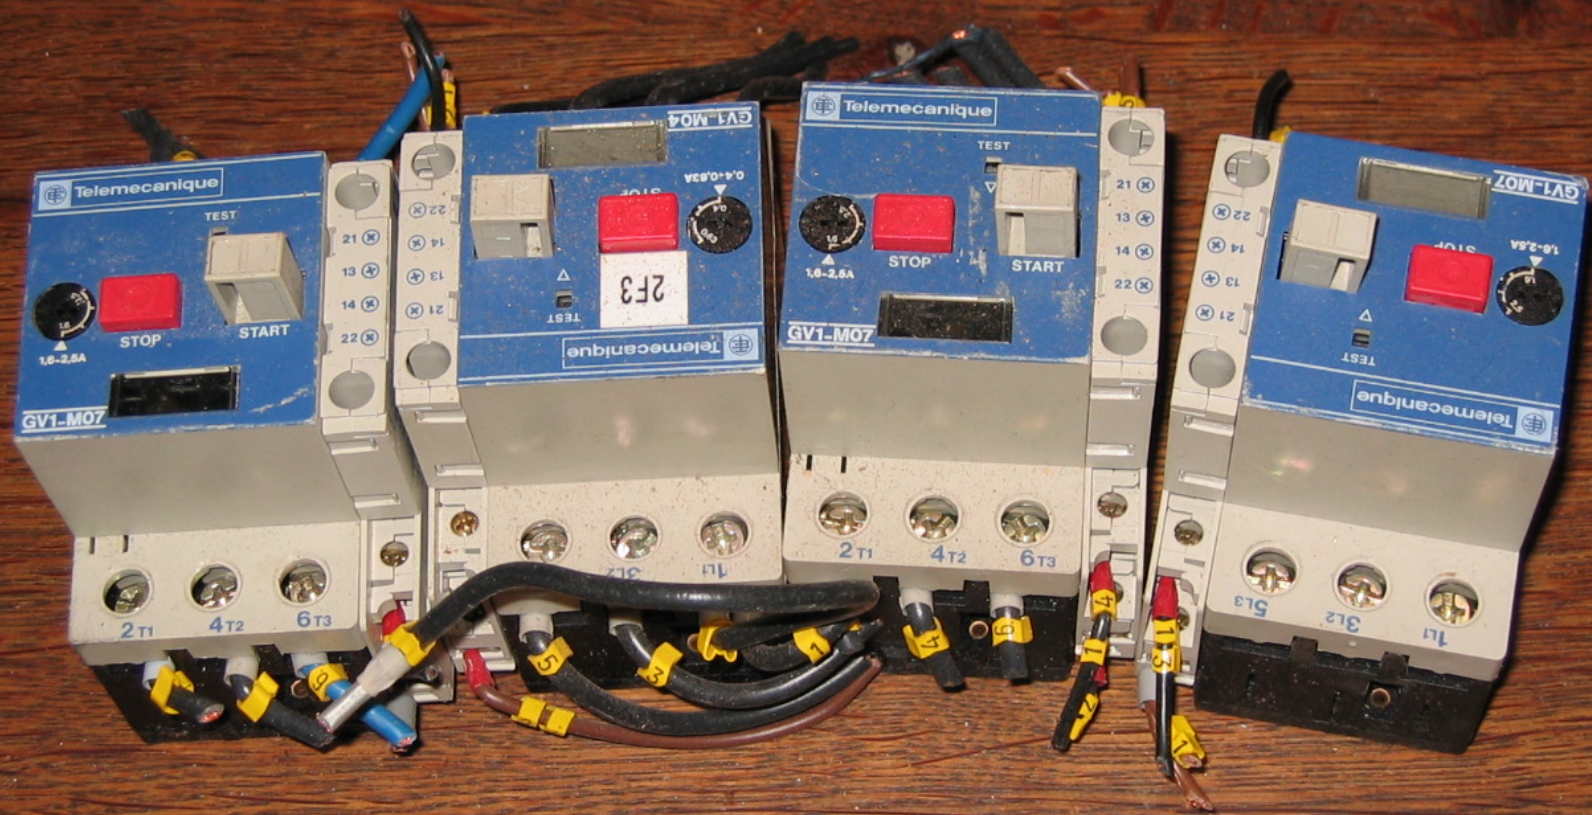

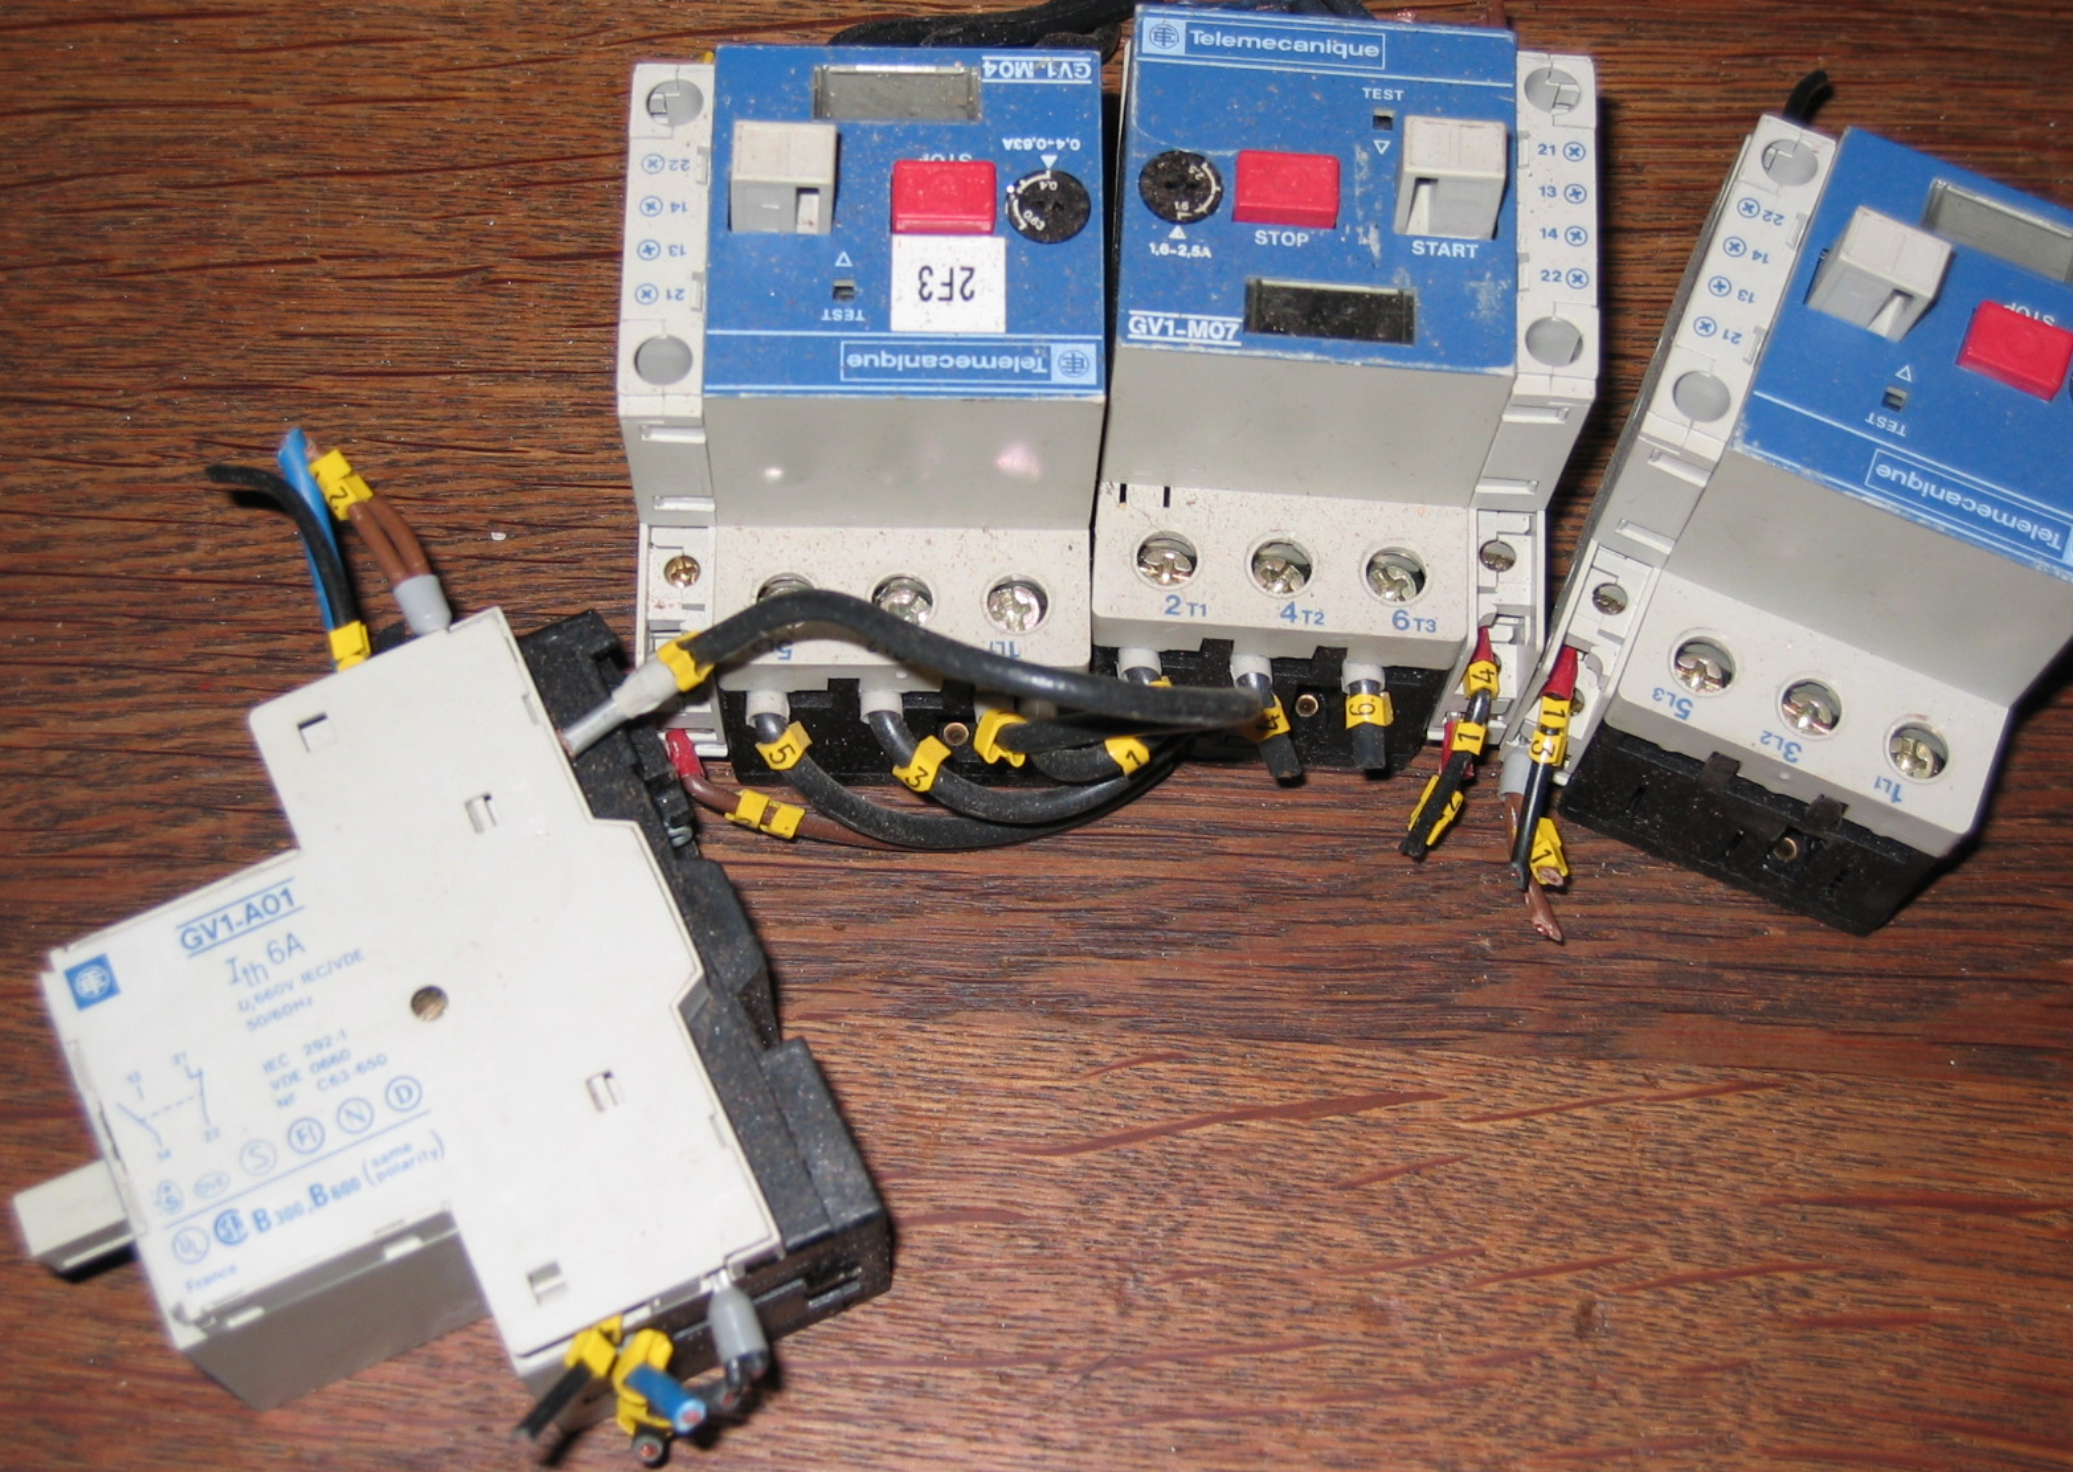

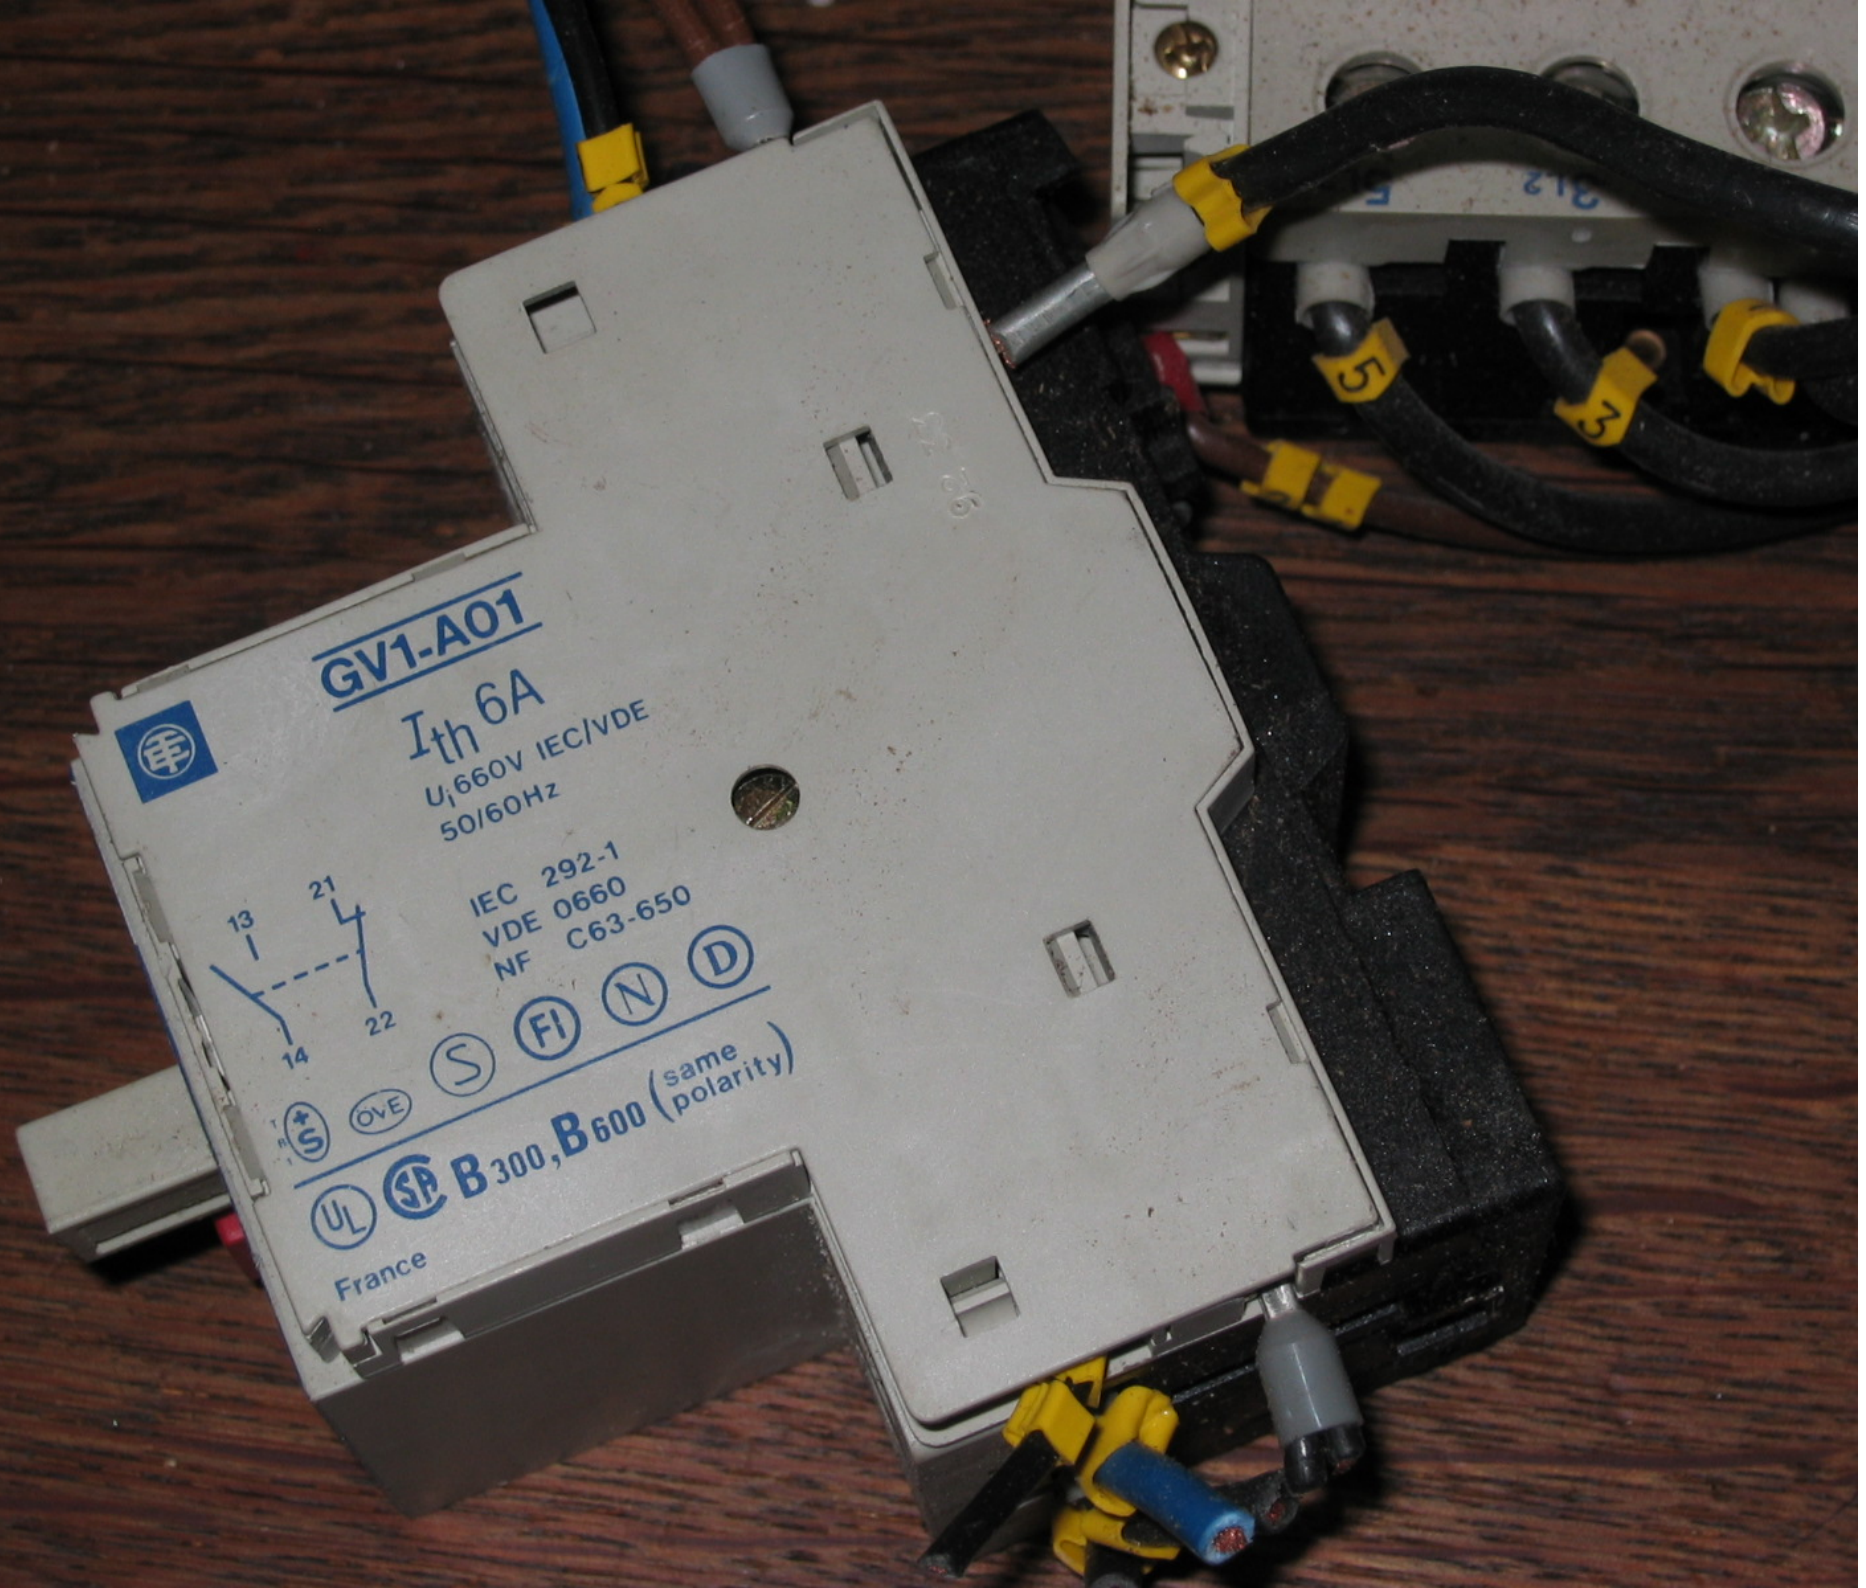


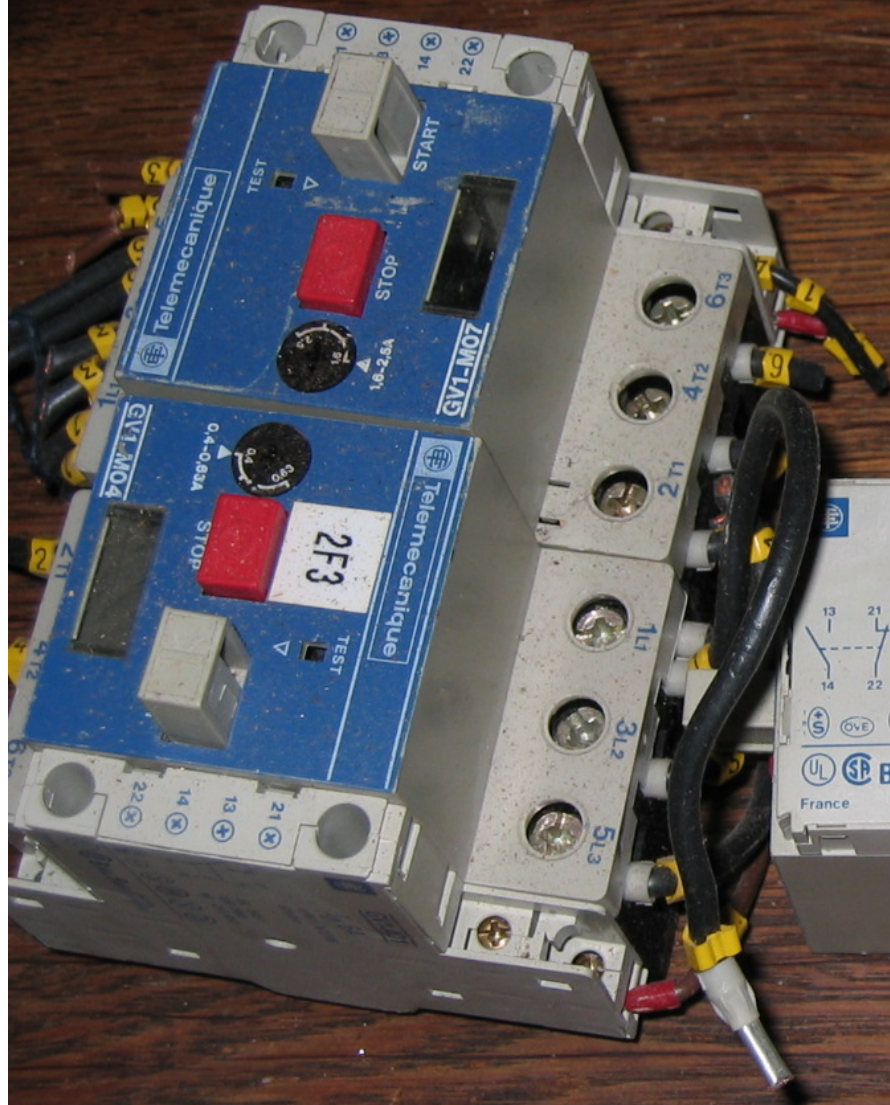

GV1-A01
 $I_{th} 6A$
 $U_e 660V$ IEC/VDE
50/60Hz

IEC 292-1
VDE 0660
NF C63-650

UL **B300, B600** (same polarity)
France

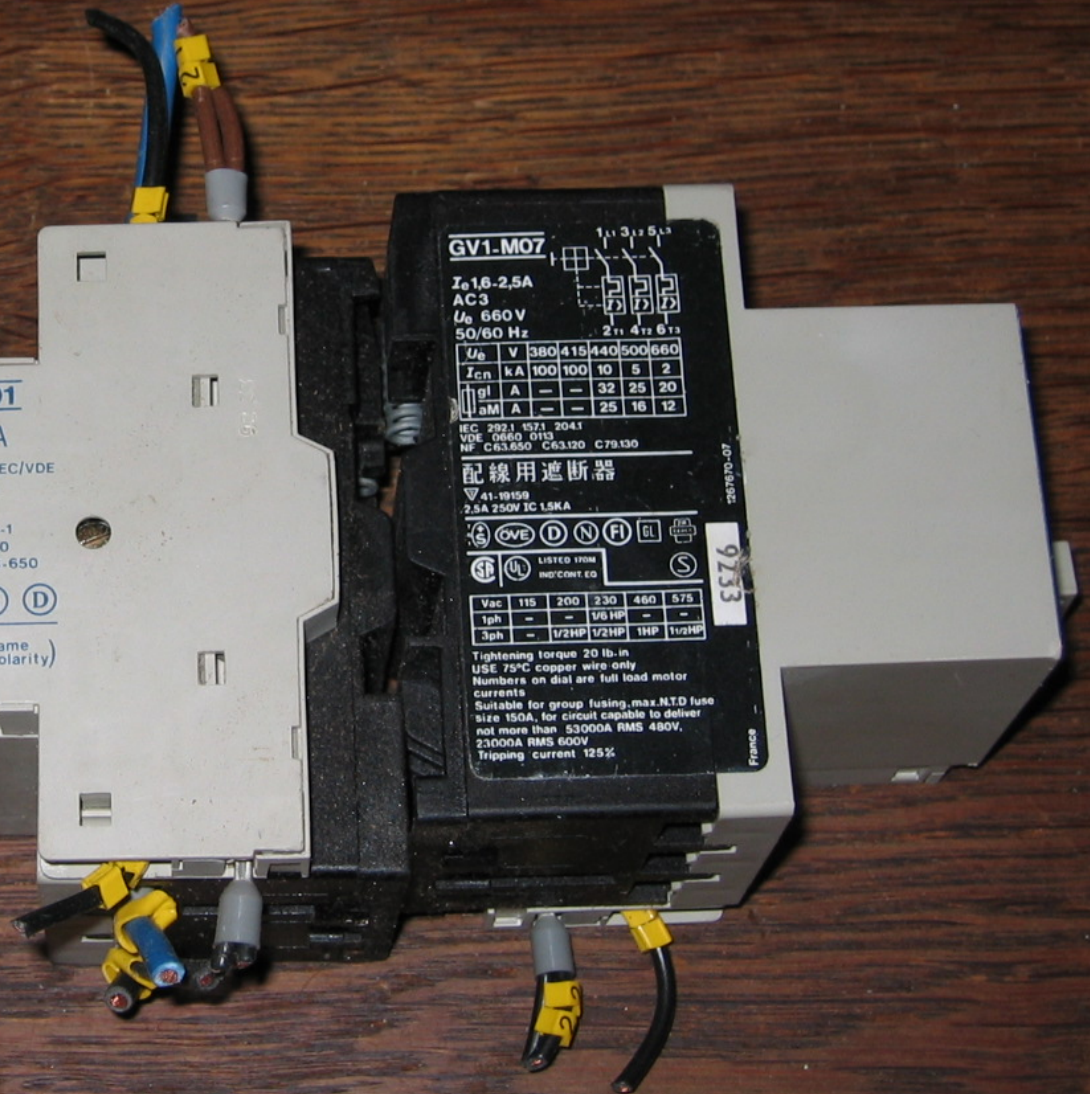

GV1-M07

$I_n 16-25A$
AC3
 $U_e 660V$
50/60 Hz

U_e	V	380	415	440	500	660
I_{cn}	kA	100	100	10	5	2
I_{gl}	A	—	—	32	25	20
I_{am}	A	—	—	25	16	12

IEC 292-1 1521 2041
VDE 0660 0113
NF C63-650 C63-120 C79-130



配線用遮断器

V 41-19159
2.5A 250V IC 1.5KA

LISTED FROM IND'CONT. EG					


Vac	115	200	230	460	575
1ph	—	—	—	1/6 HP	—
3ph	—	1/2 HP	1/2 HP	1 HP	1 1/2 HP


Tightening torque 20 lb.in
USE 75°C copper wire only
Numbers on dial are full load motor
currents
Suitable for group fusing, max. N.T.D fuse
size 150A, for circuit capable to deliver
not more than 53000A RMS 480V,
23000A RMS 600V
Tripping current 125%

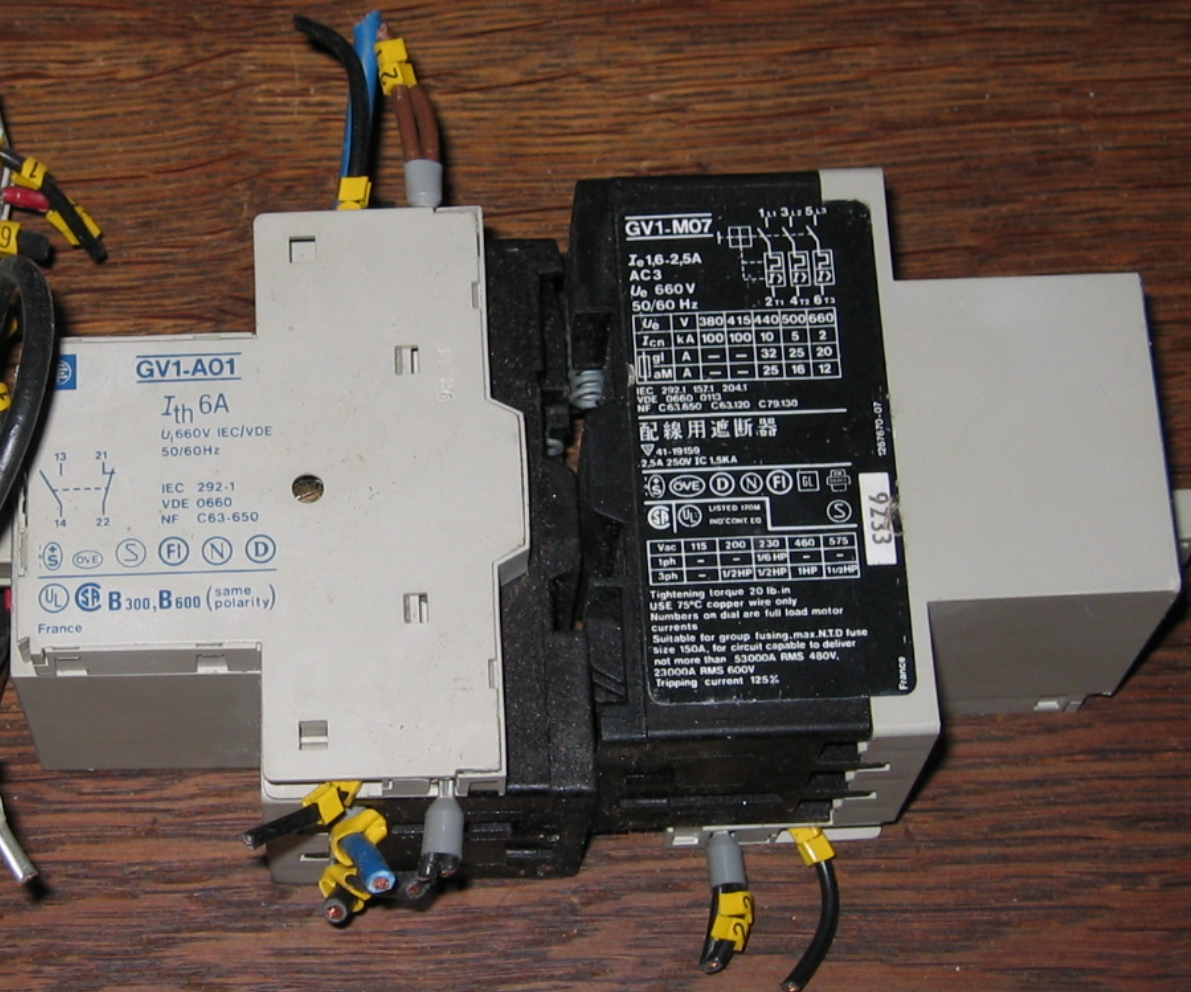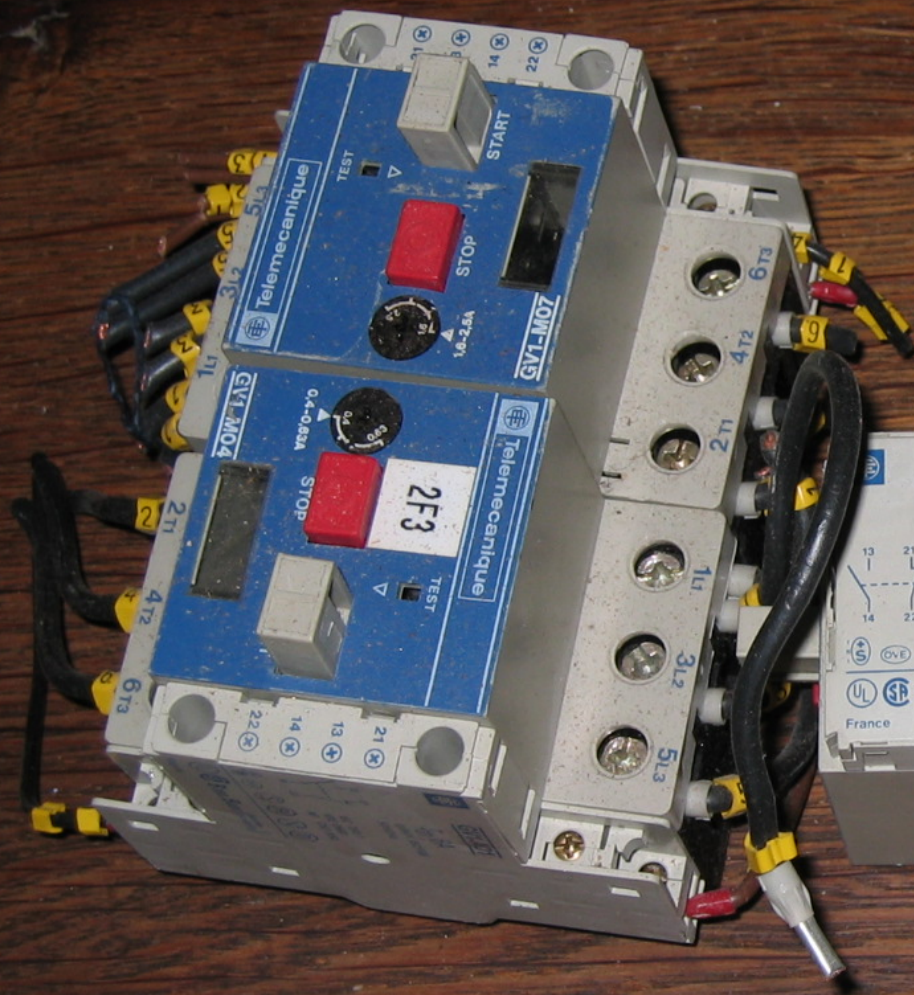






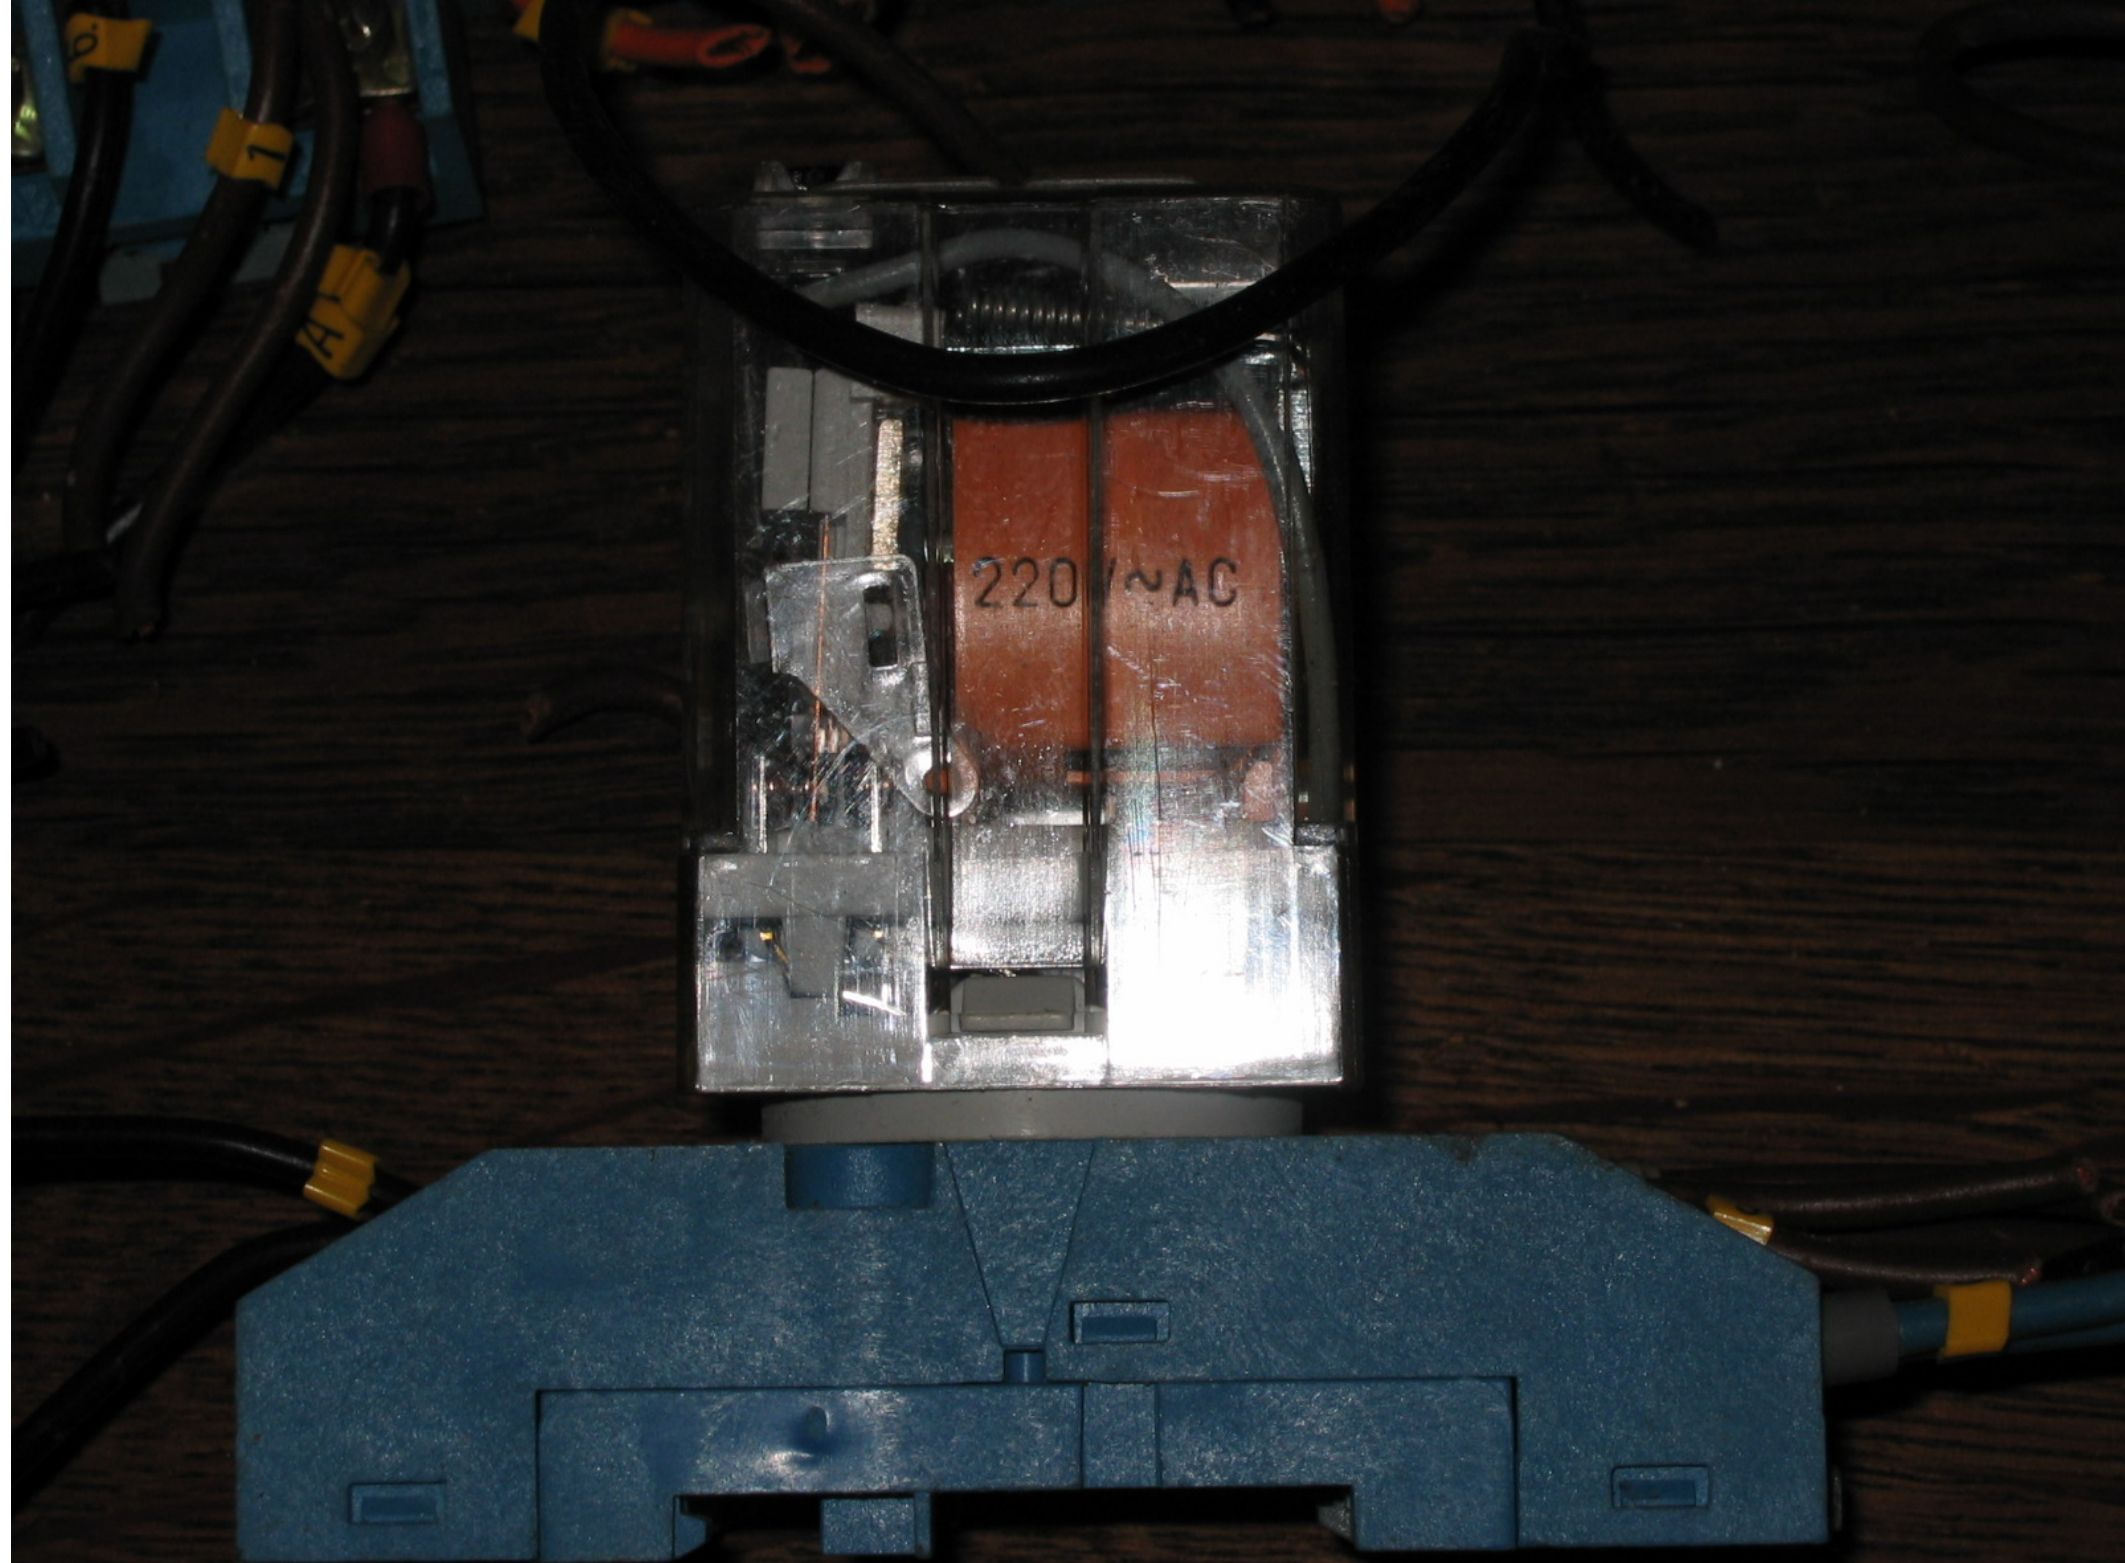


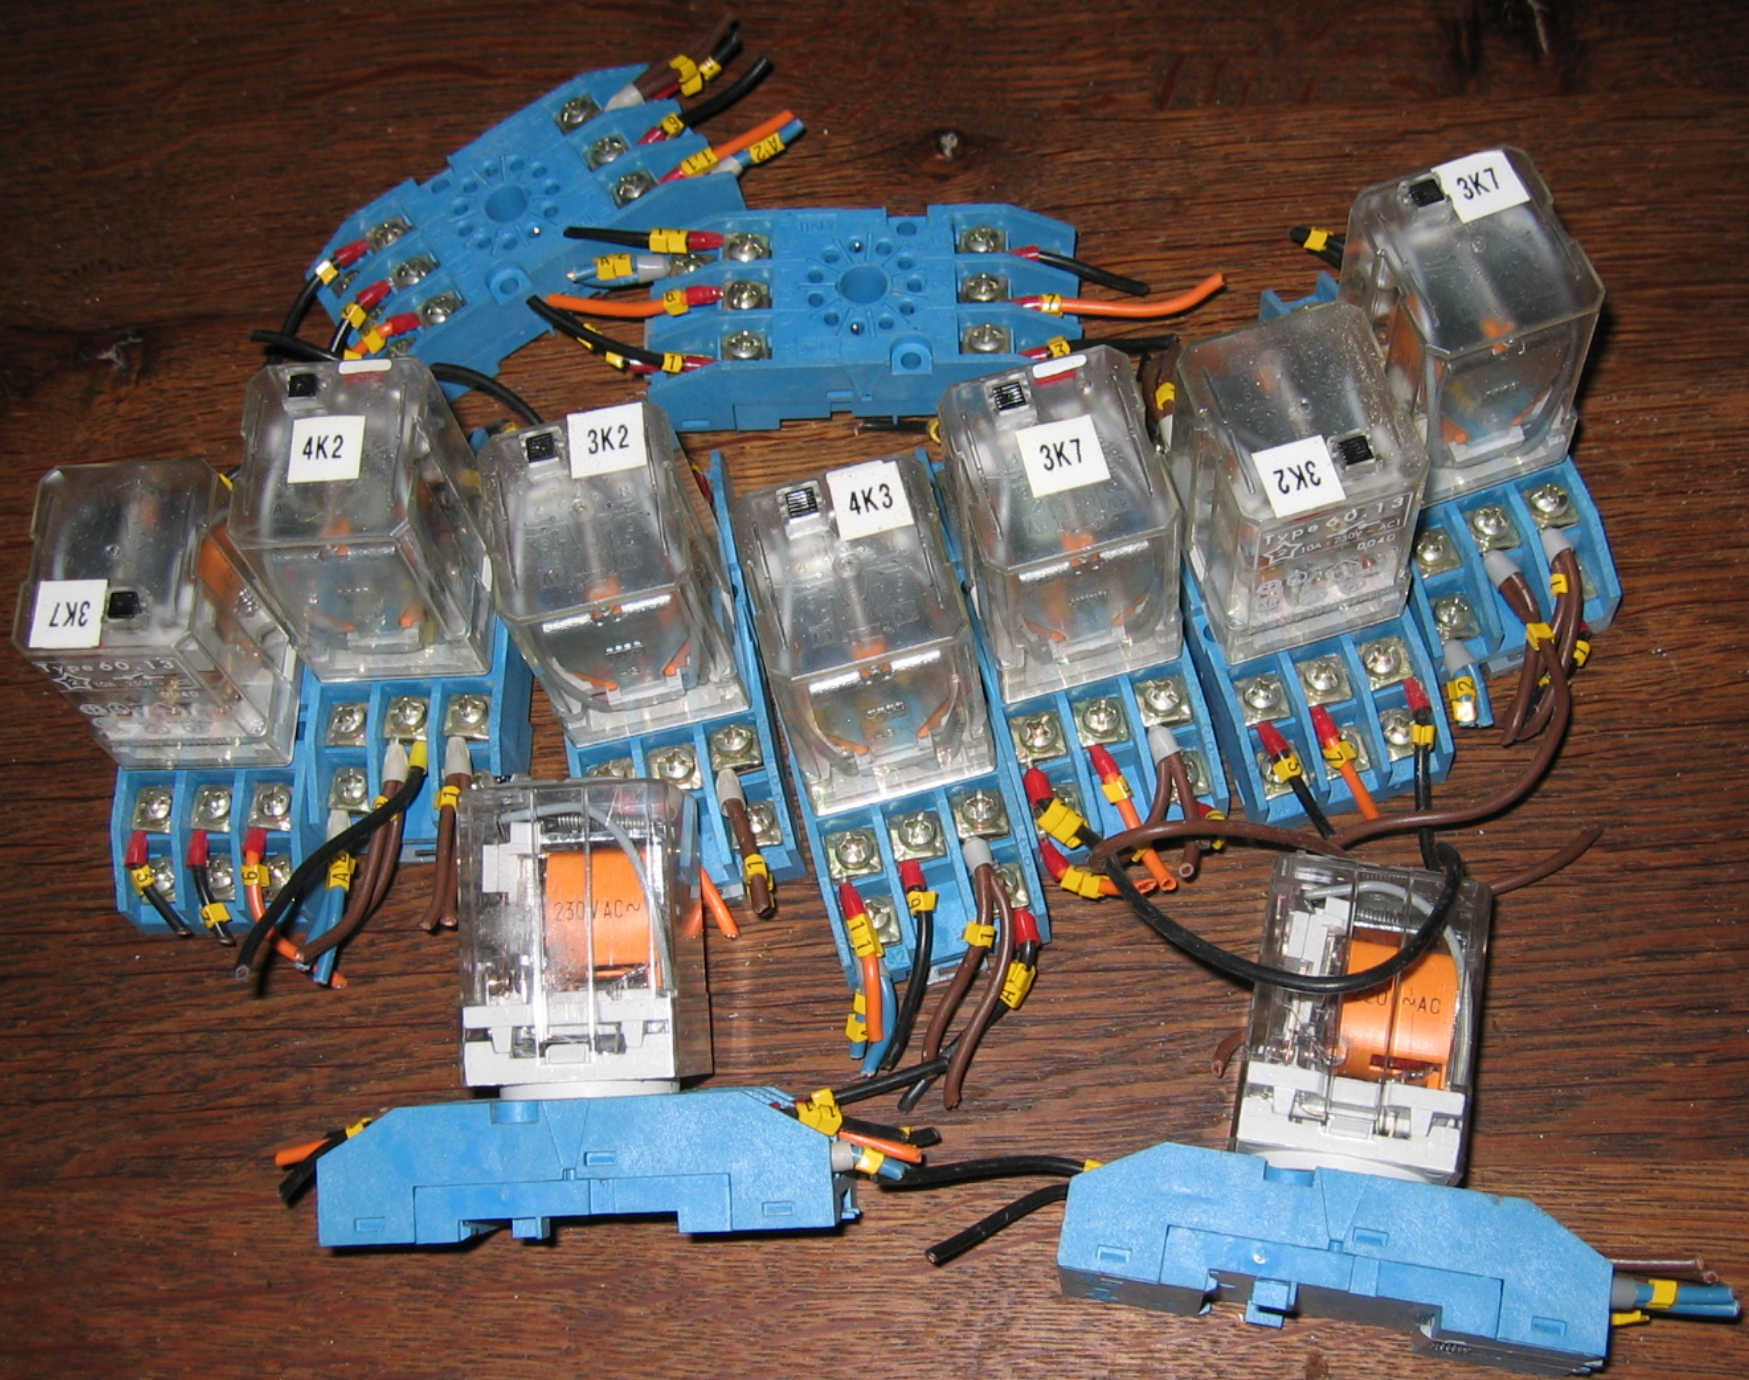







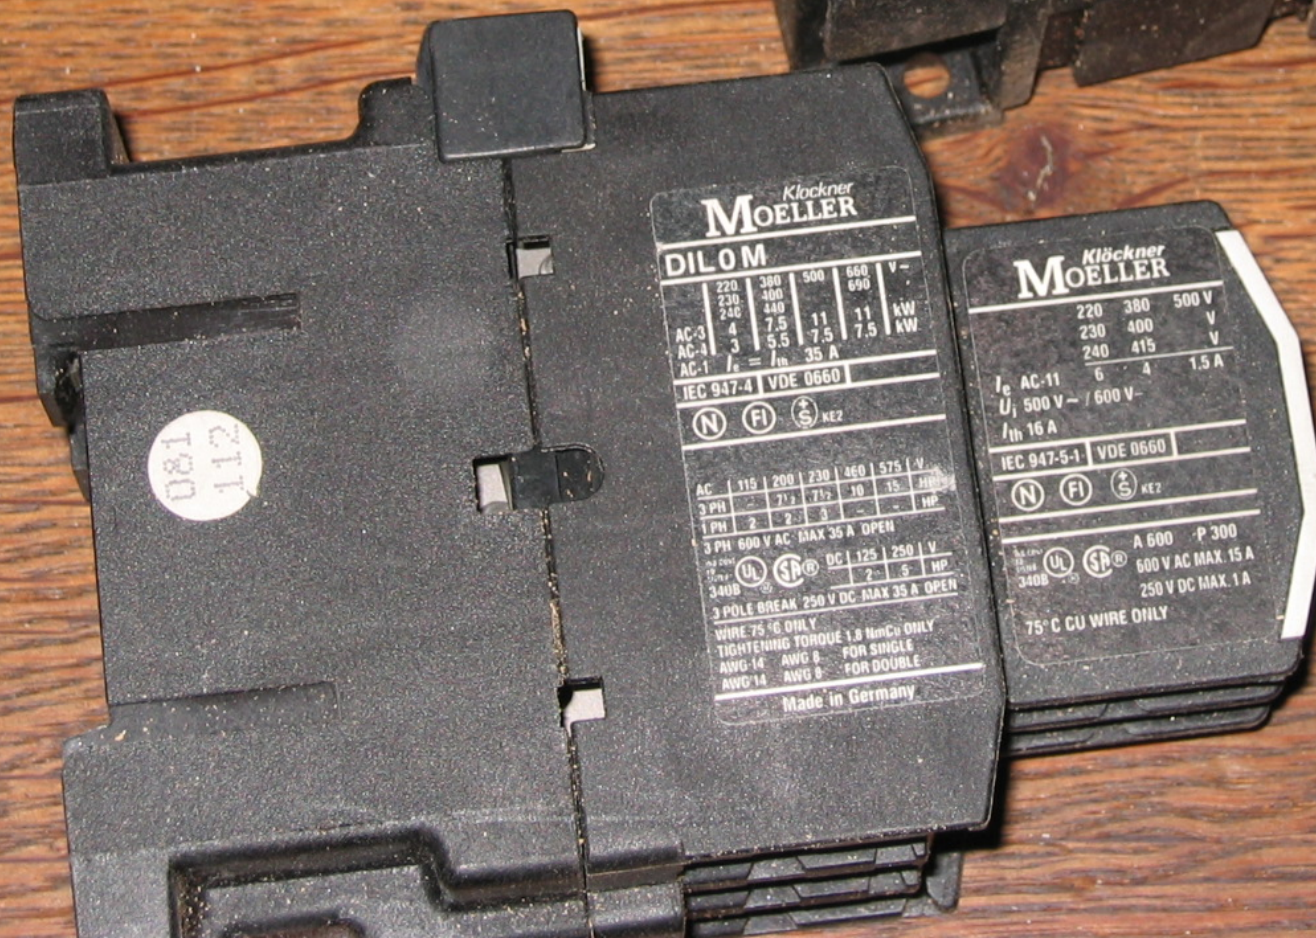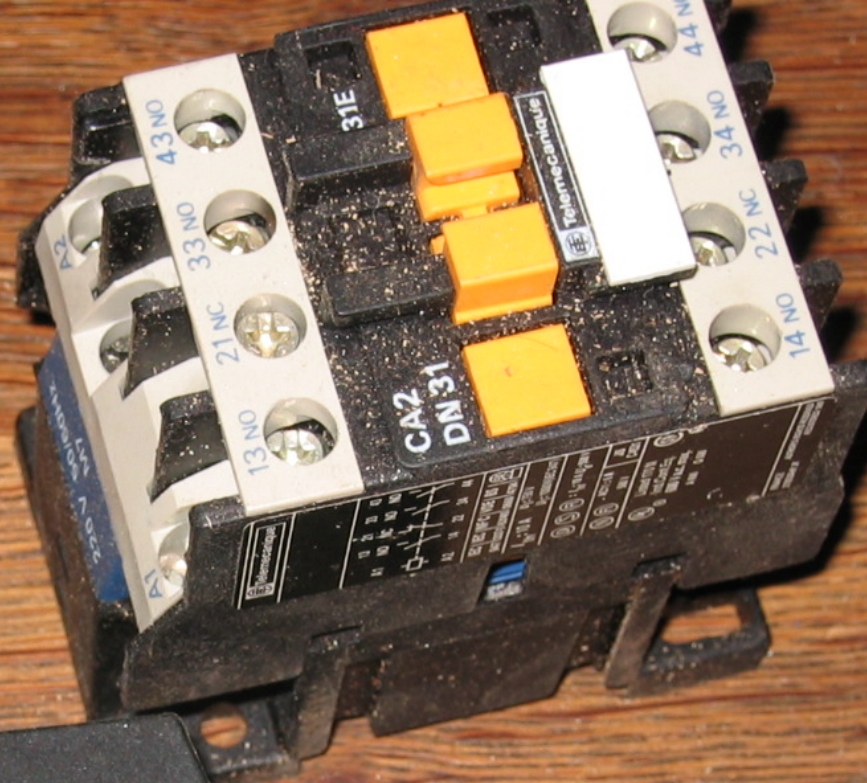

Moeller
DIL OM

	220	380	500	660	V -
	230	400		690	
	240	440			
AC-3	4	7.5	11	11	kW
AC-4	3	5.5	7.5	7.5	kW
AC-1	$I_c = I_{th}$	35 A			

IEC 947-4 VDE 0660

(N) (FI) (S) KE2

AC	115	200	230	460	575	V
3 PH		7 1/2	7 1/2	10	15	HP
1 PH	2	2	3			HP

3 PH 600 V AC MAX 35 A OPEN

DC	125	250	V
UL			
340B			

3 POLE BREAK 250 V DC MAX 35 A OPEN

WIRE 75 °C ONLY
TIGHTENING TORQUE 1.8 Nm ONLY
AWG 14 AWG 8 FOR SINGLE
AWG 14 AWG 8 FOR DOUBLE

Made in Germany

Moeller

	220	380	500	V
	230	400		V
	240	415		V
I_c AC-11	6	4	1.5	A
U_i	500 V - / 600 V -			
I_{th}	16 A			



IEC 947-5-1 VDE 0660


(N) (FI) (S) KE2


A	600	P	300
UL			
340B			

500 V AC MAX 15 A
250 V DC MAX 1 A


75 °C CU WIRE ONLY

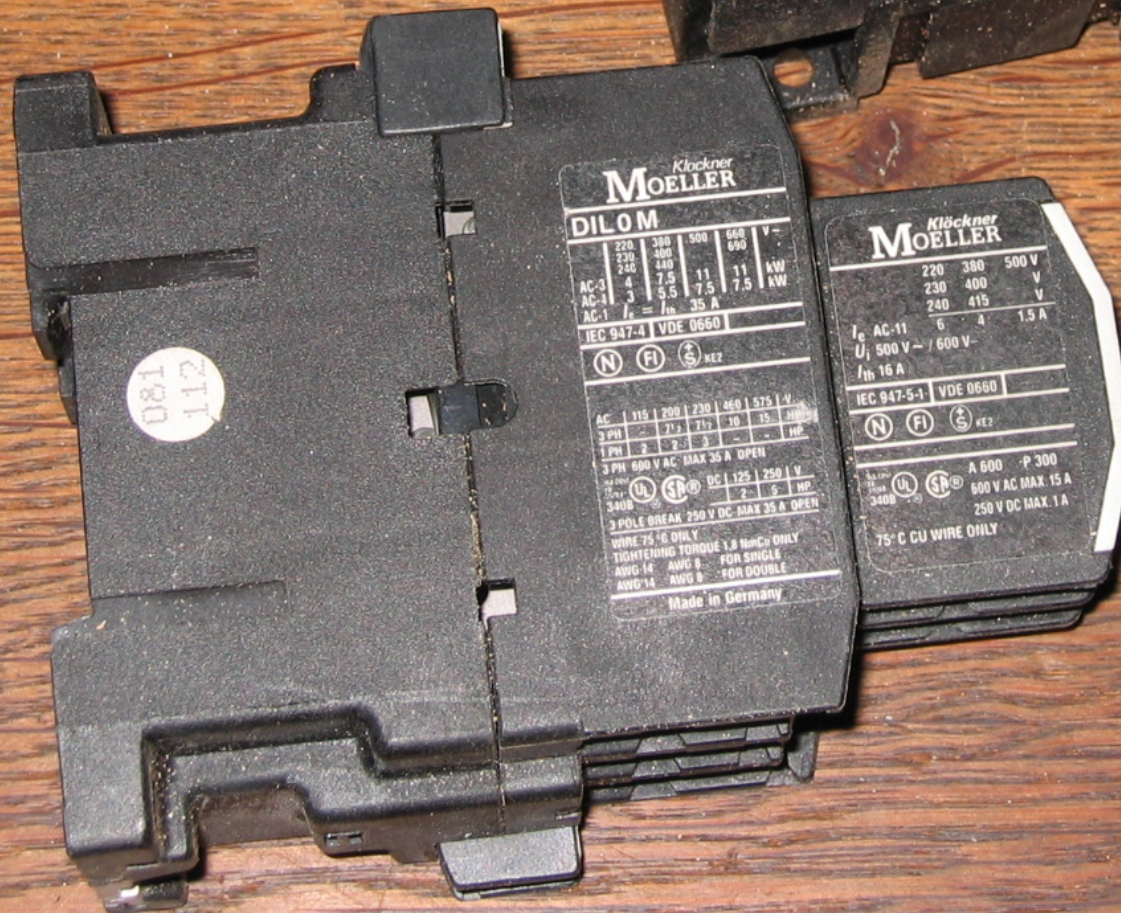
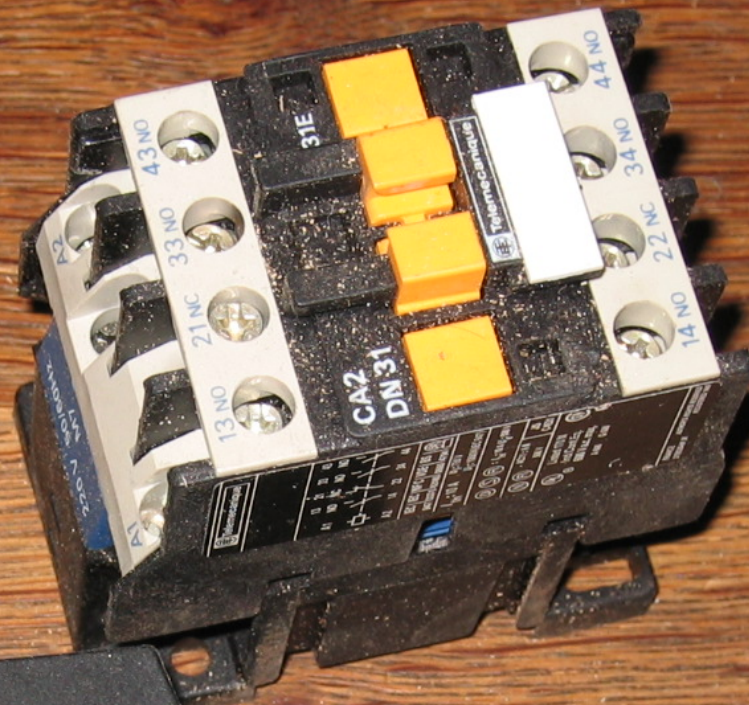


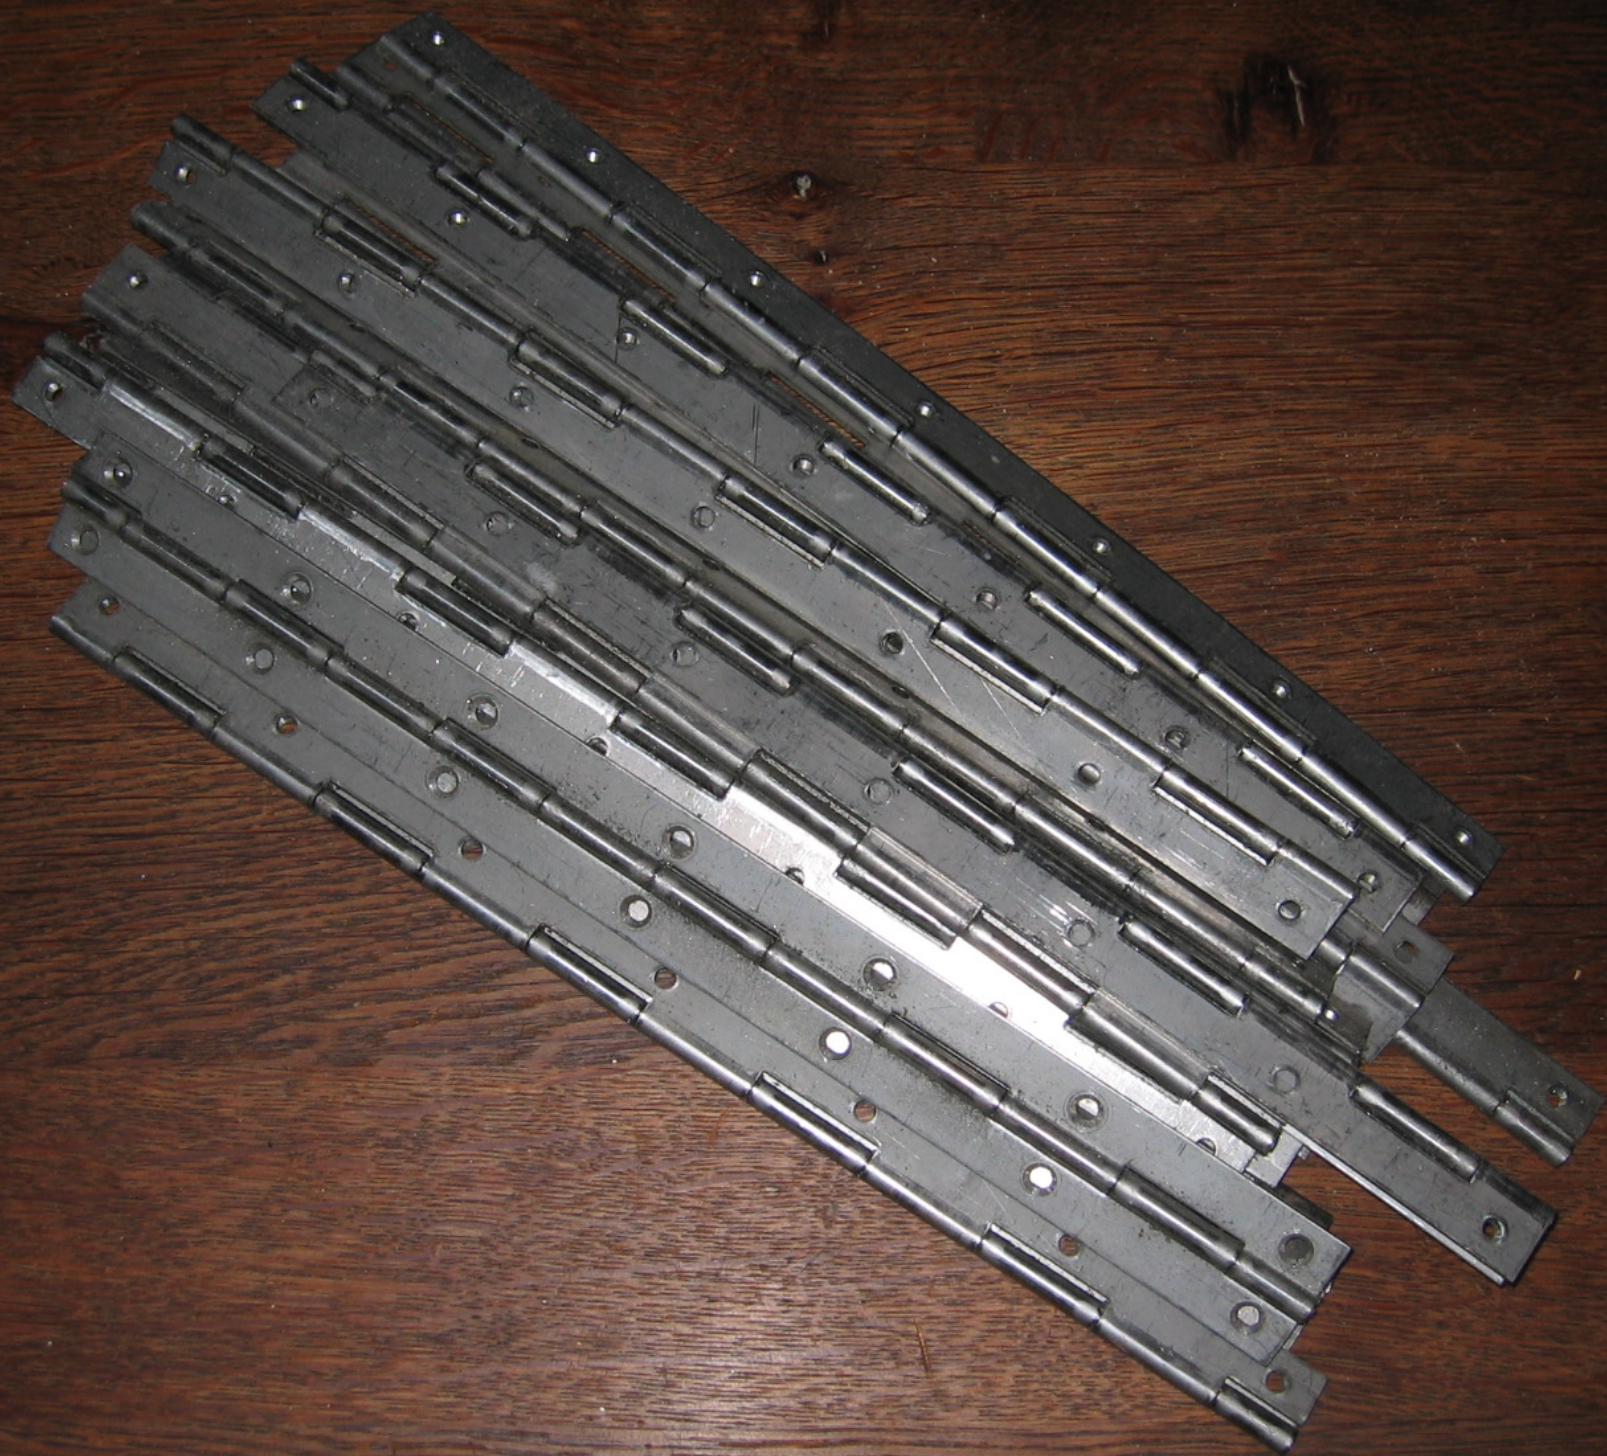


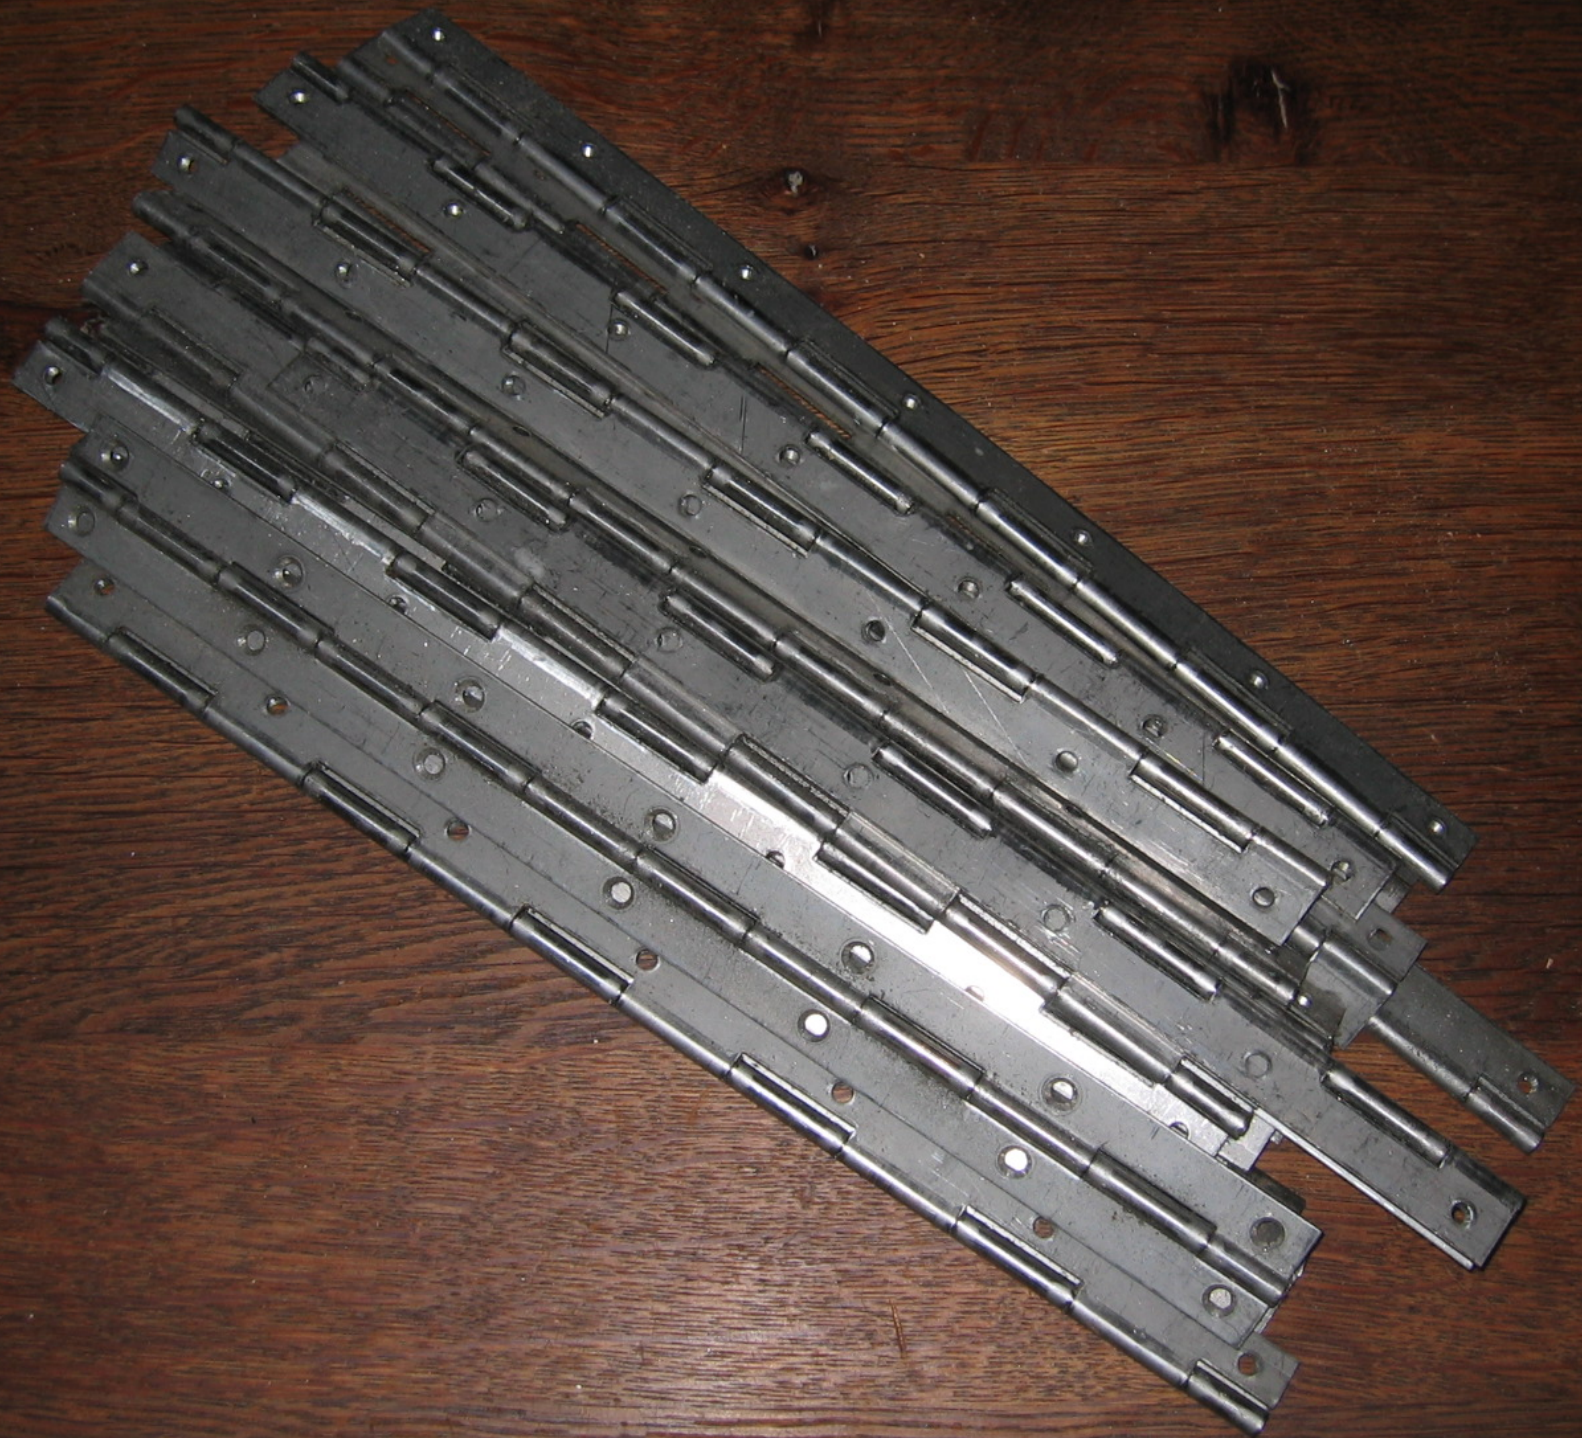





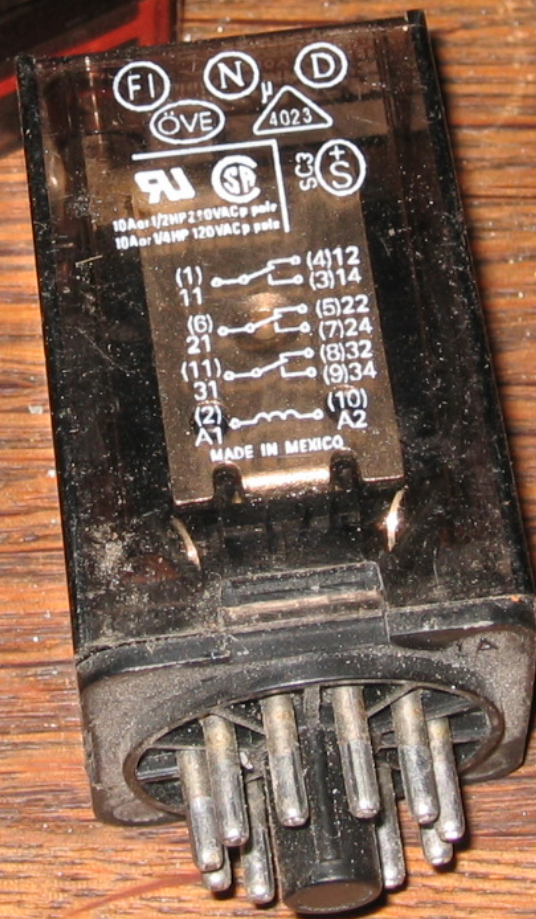

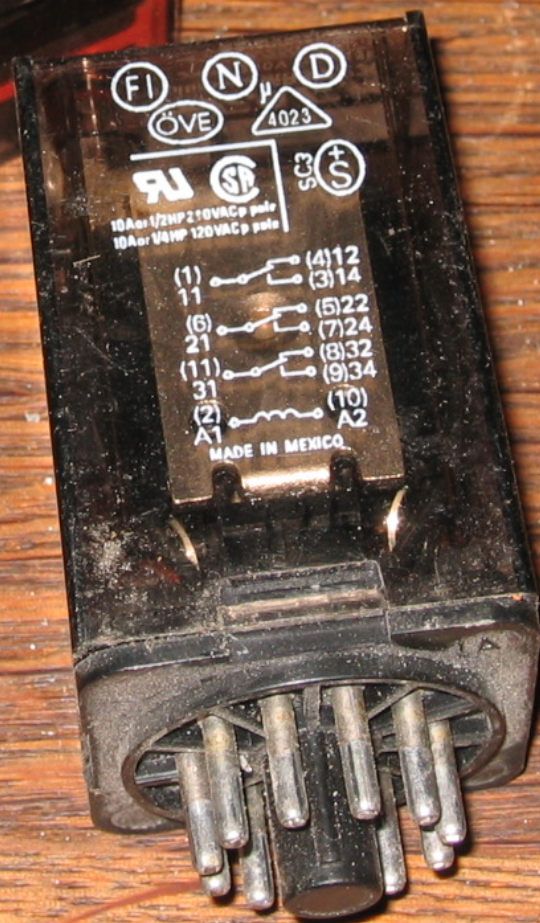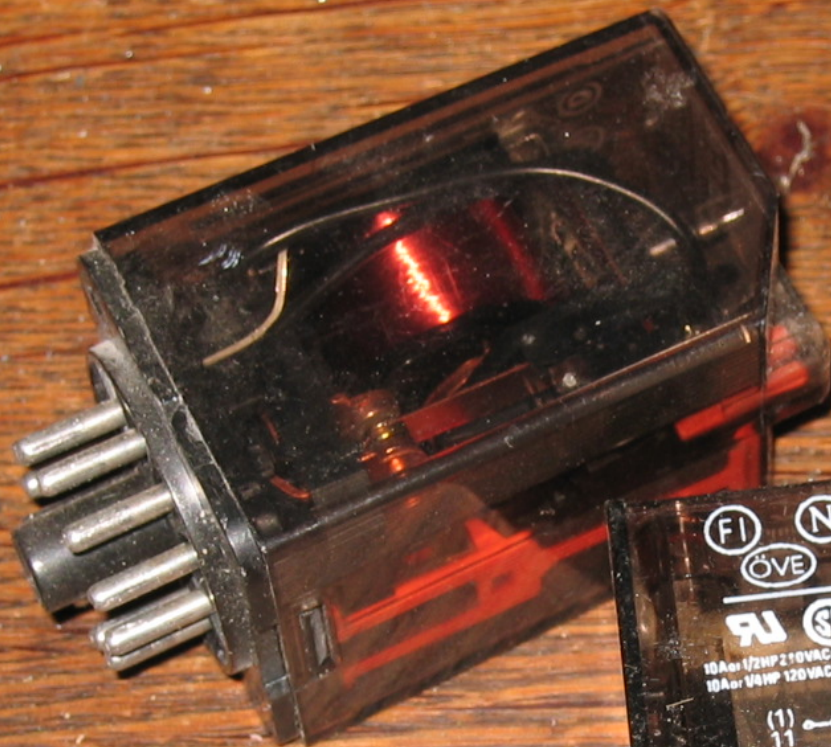

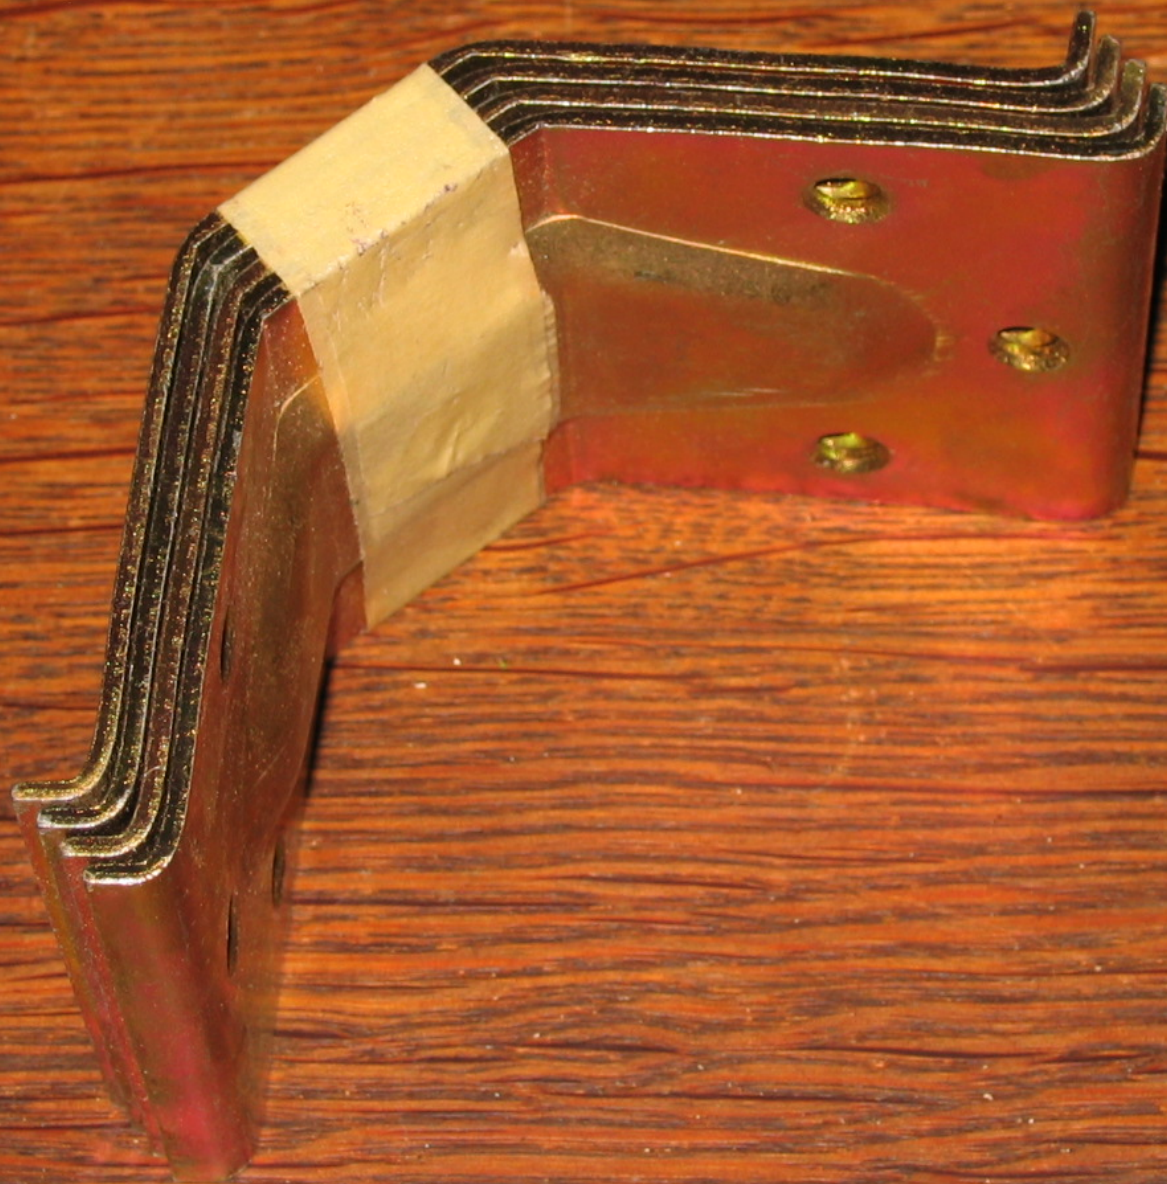

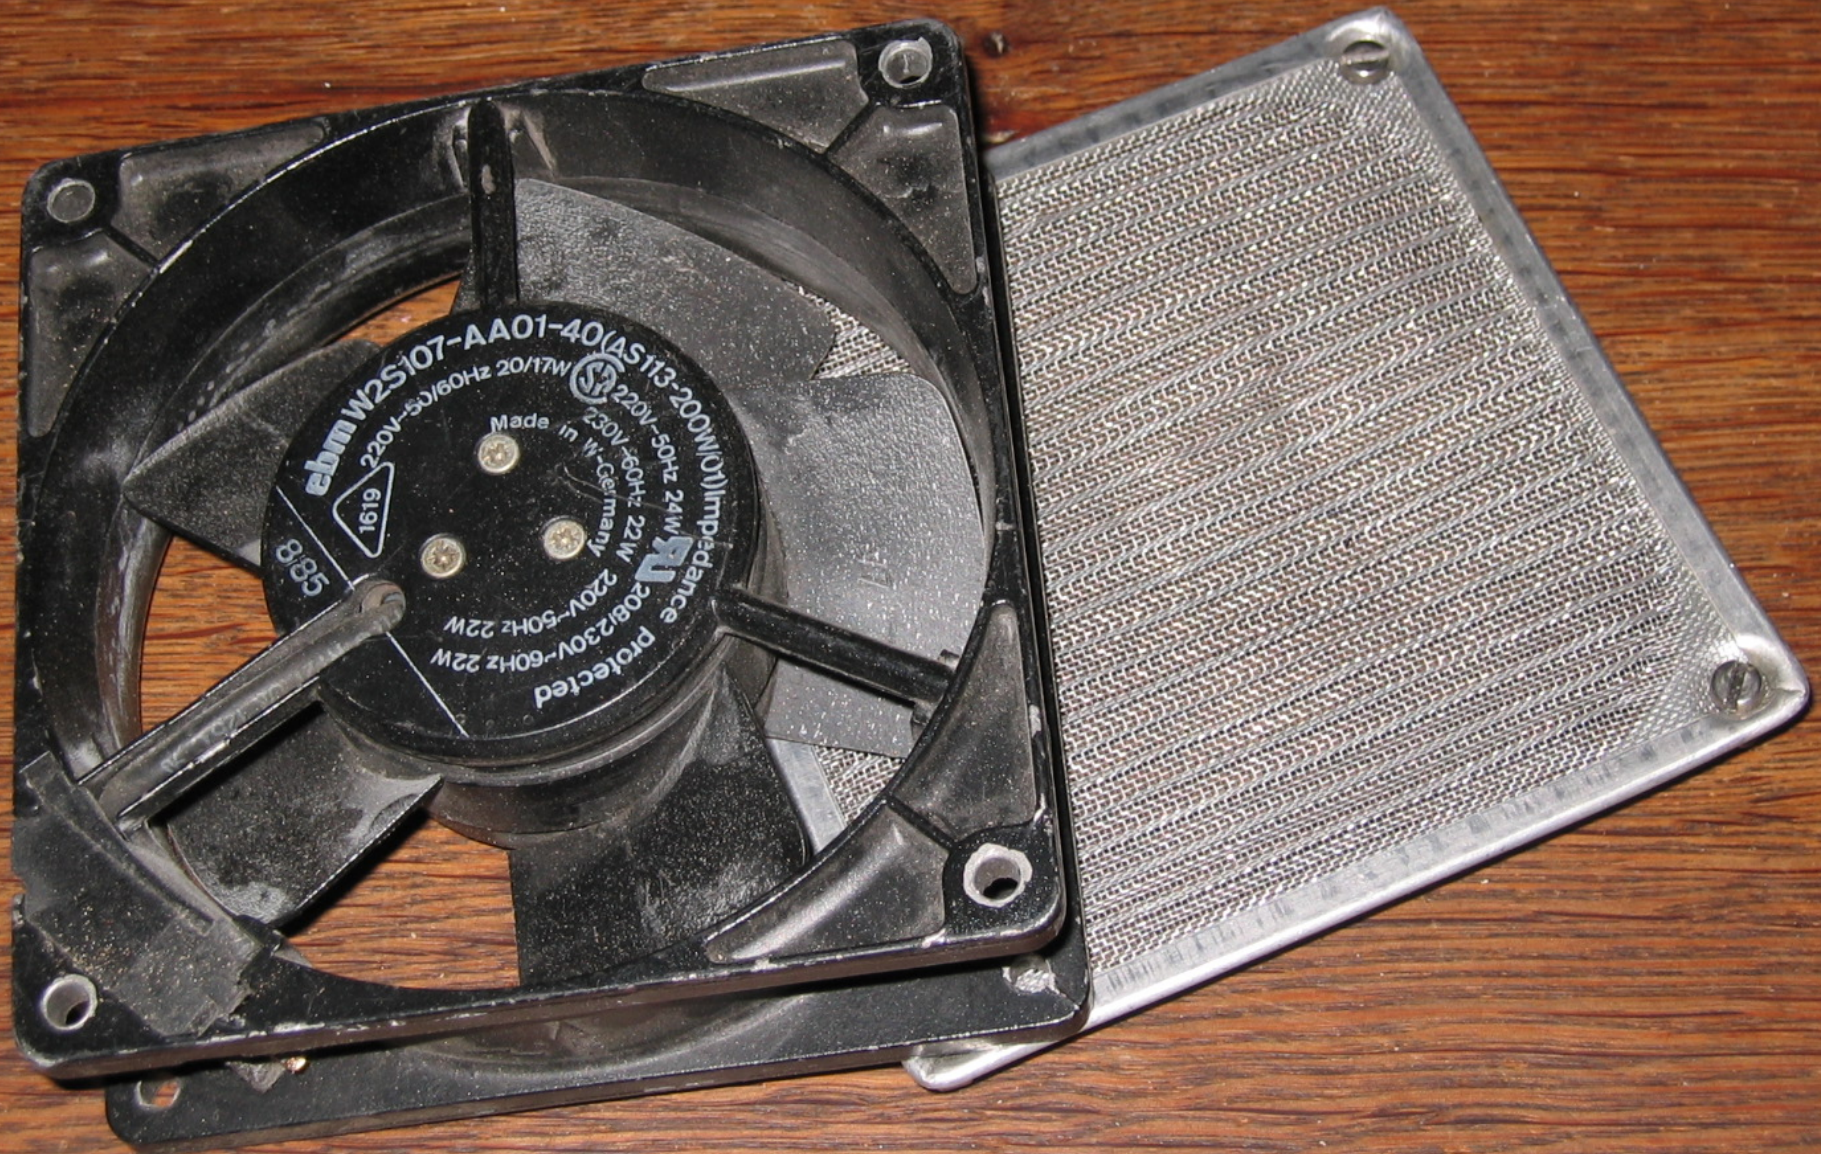

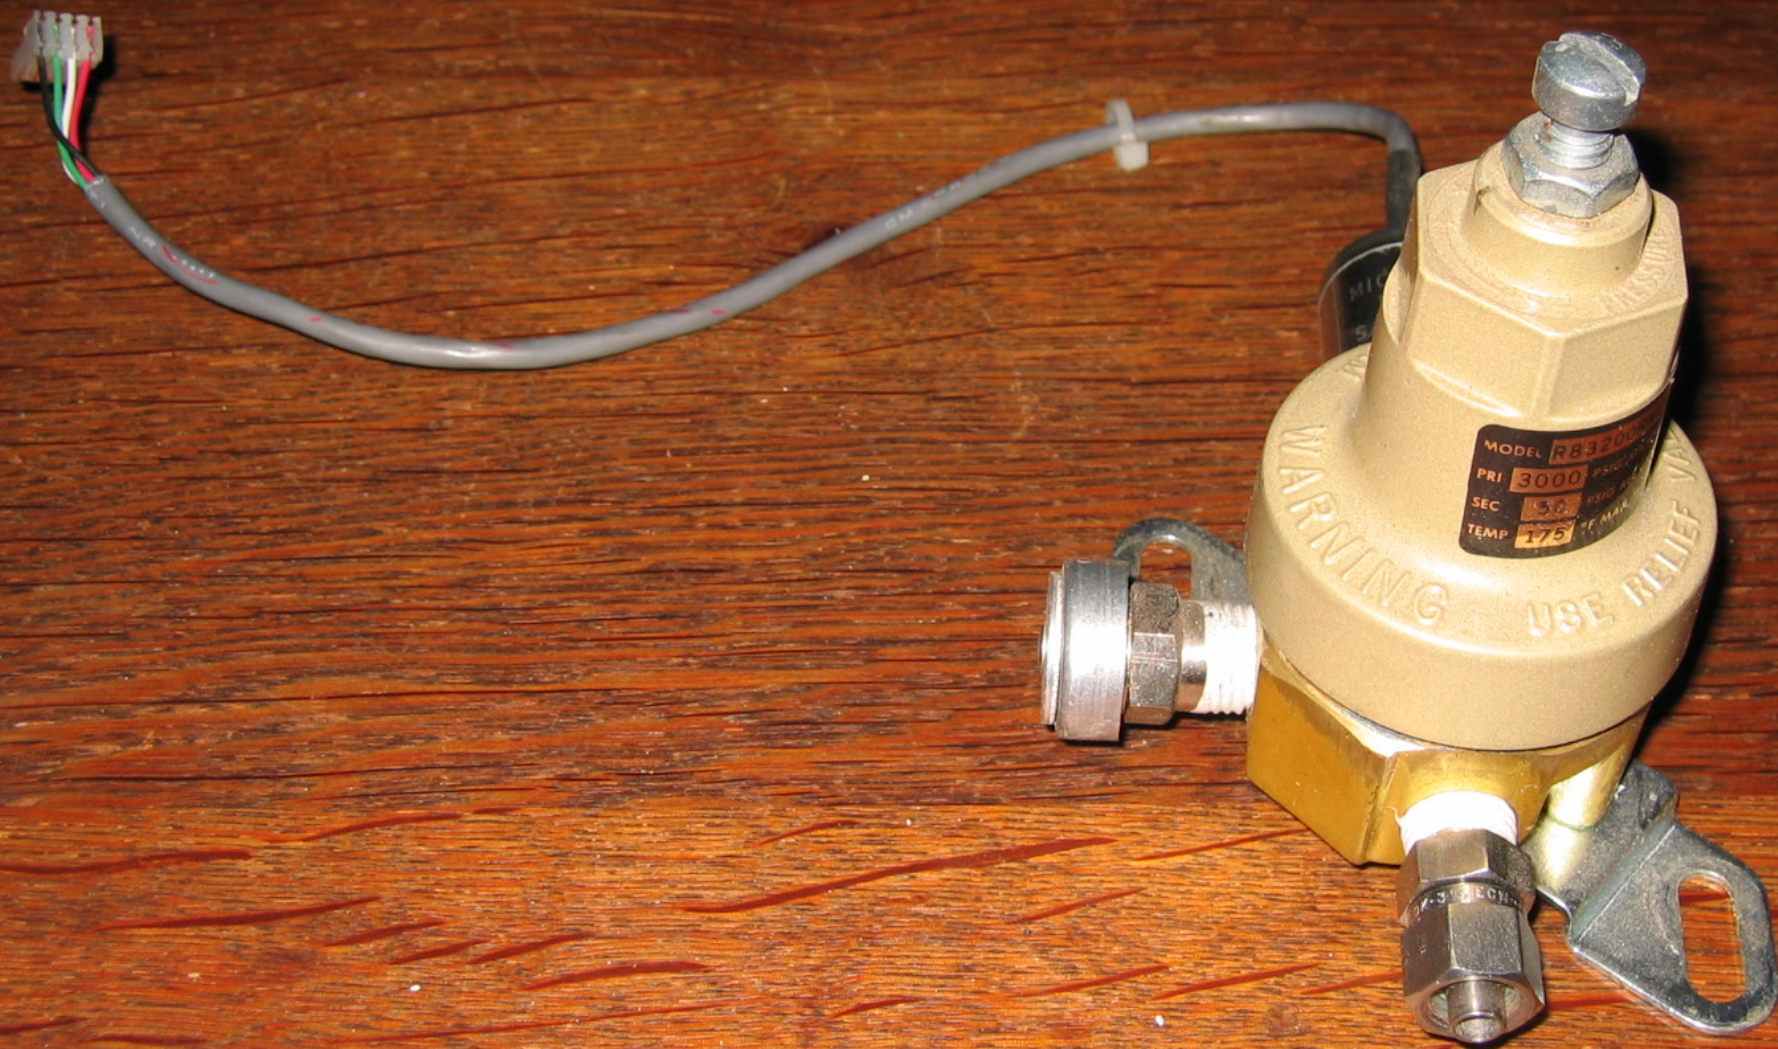










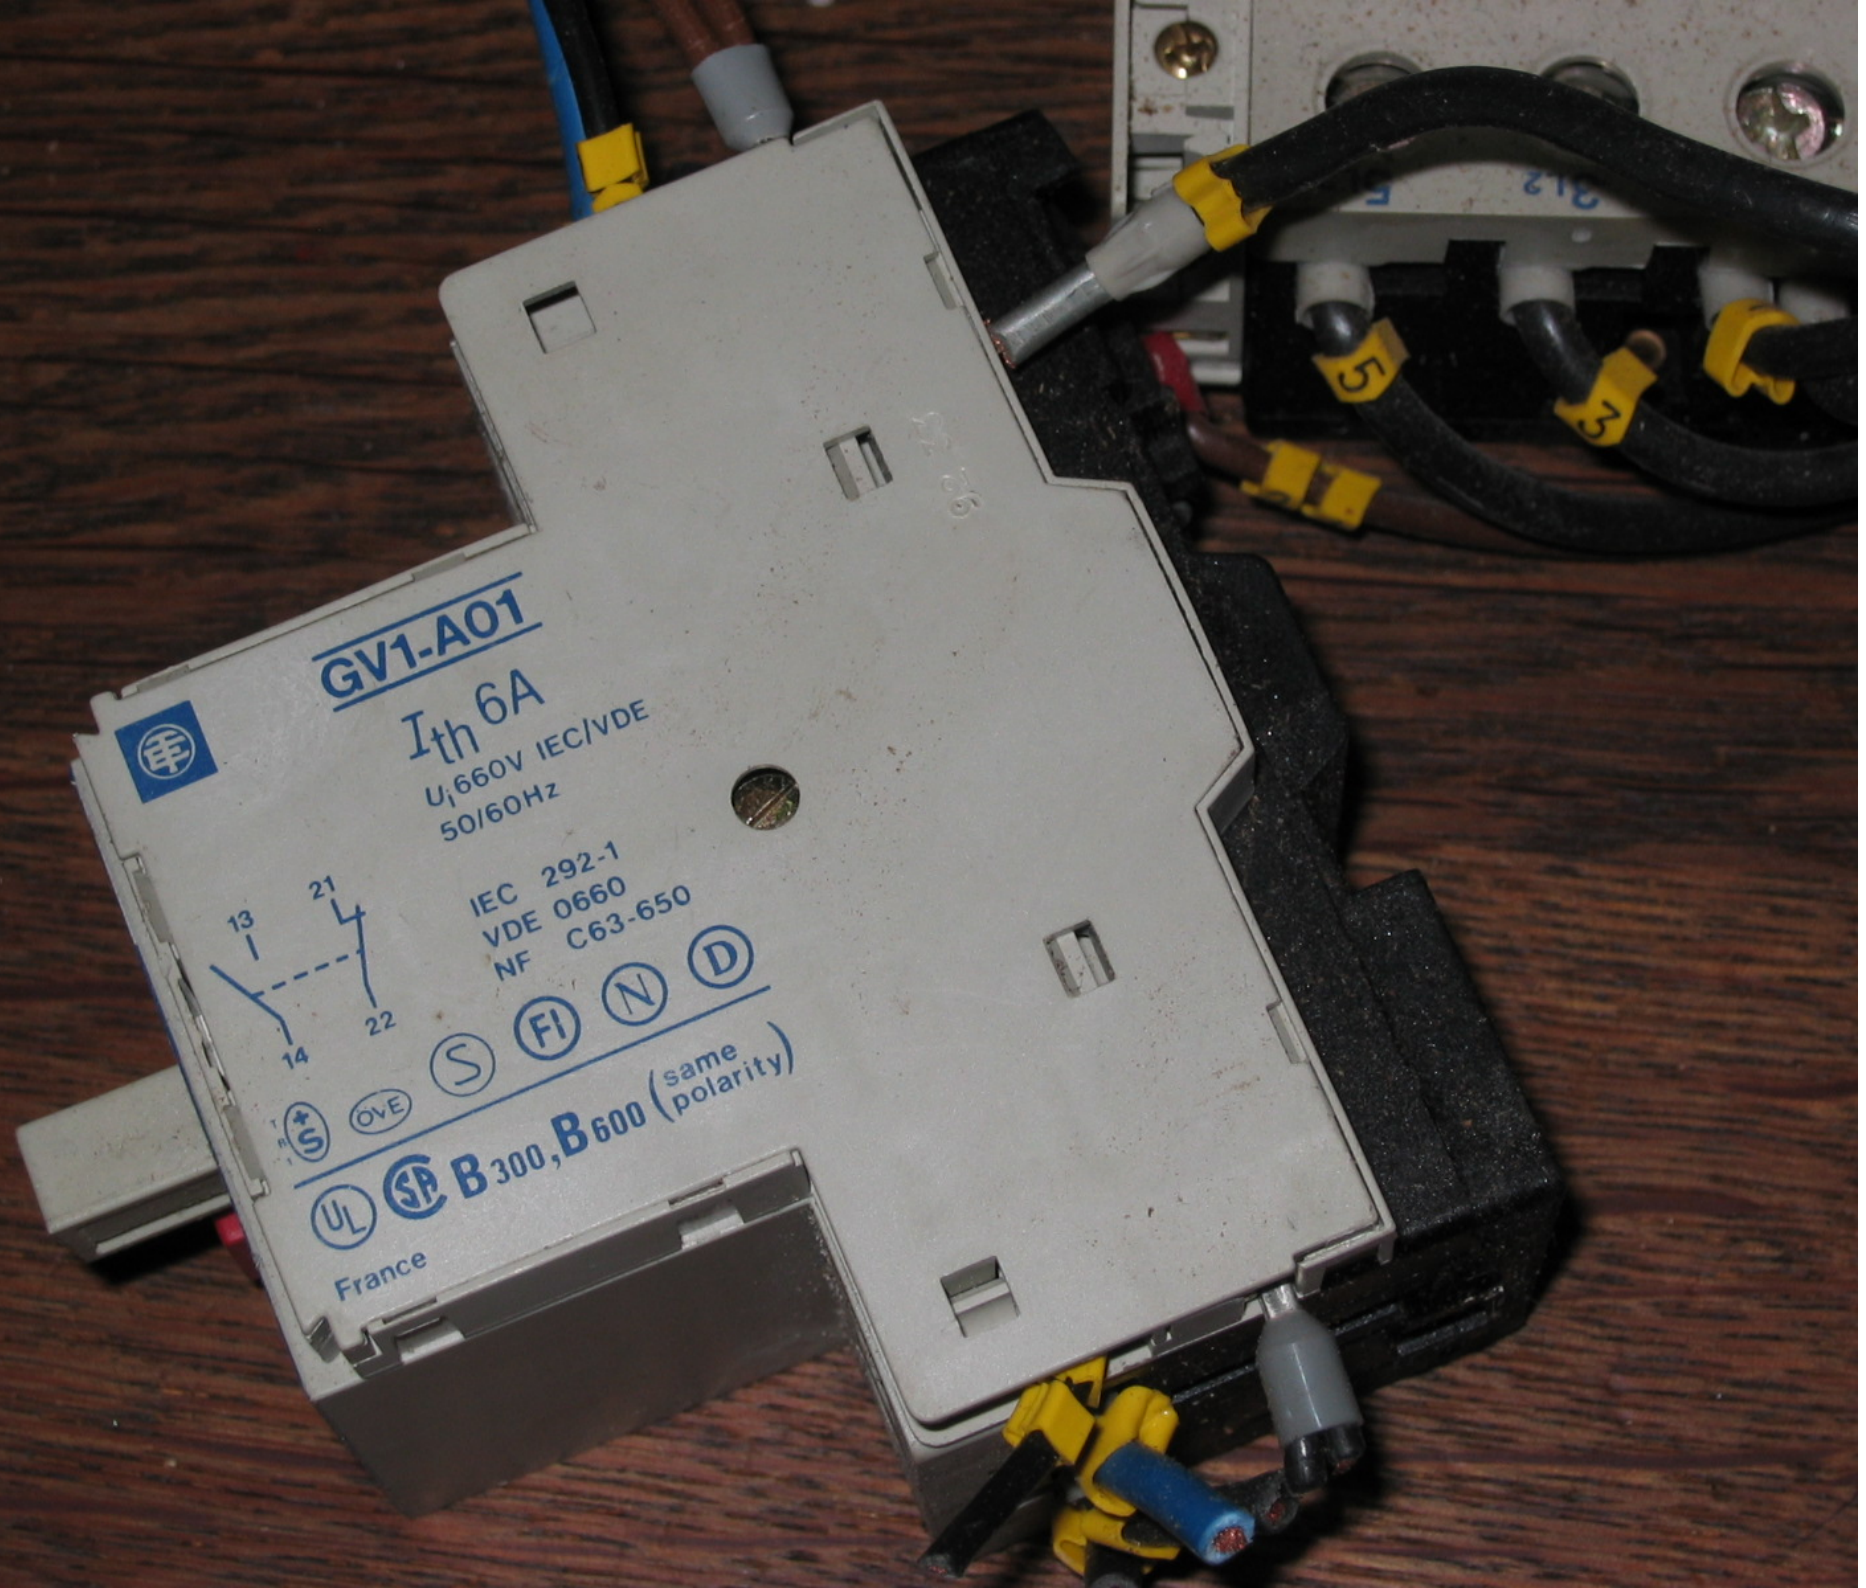











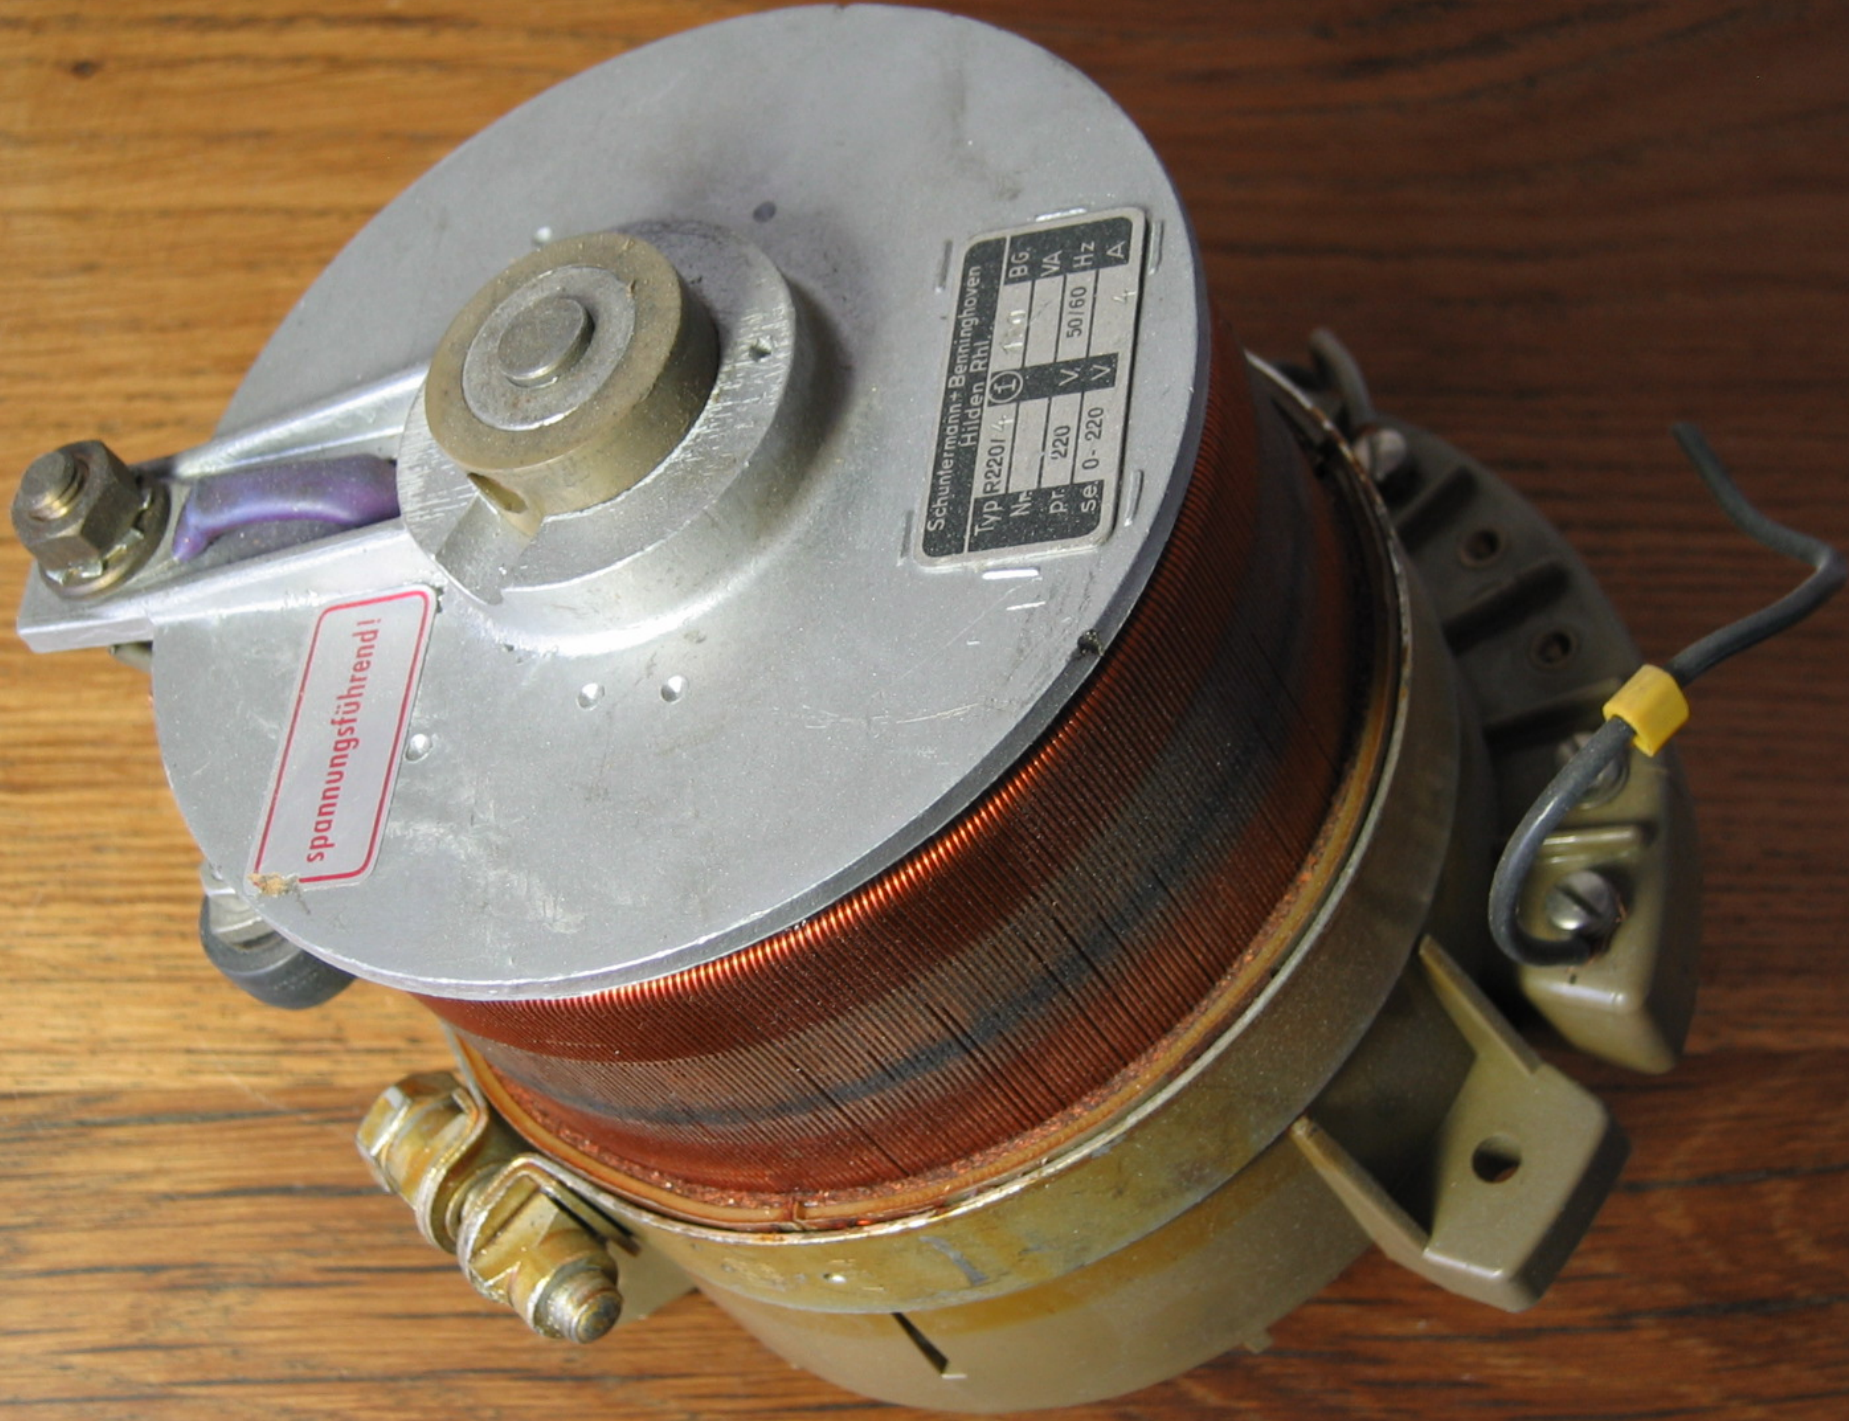

Schuntermann + Benninghoven
Hilden RHL

Typ	R2201/4	①	1-1	BG
Nr.				VA
Pr.	220	V	50/60	Hz
Se	0-220	V	4	A

spannungsführend!

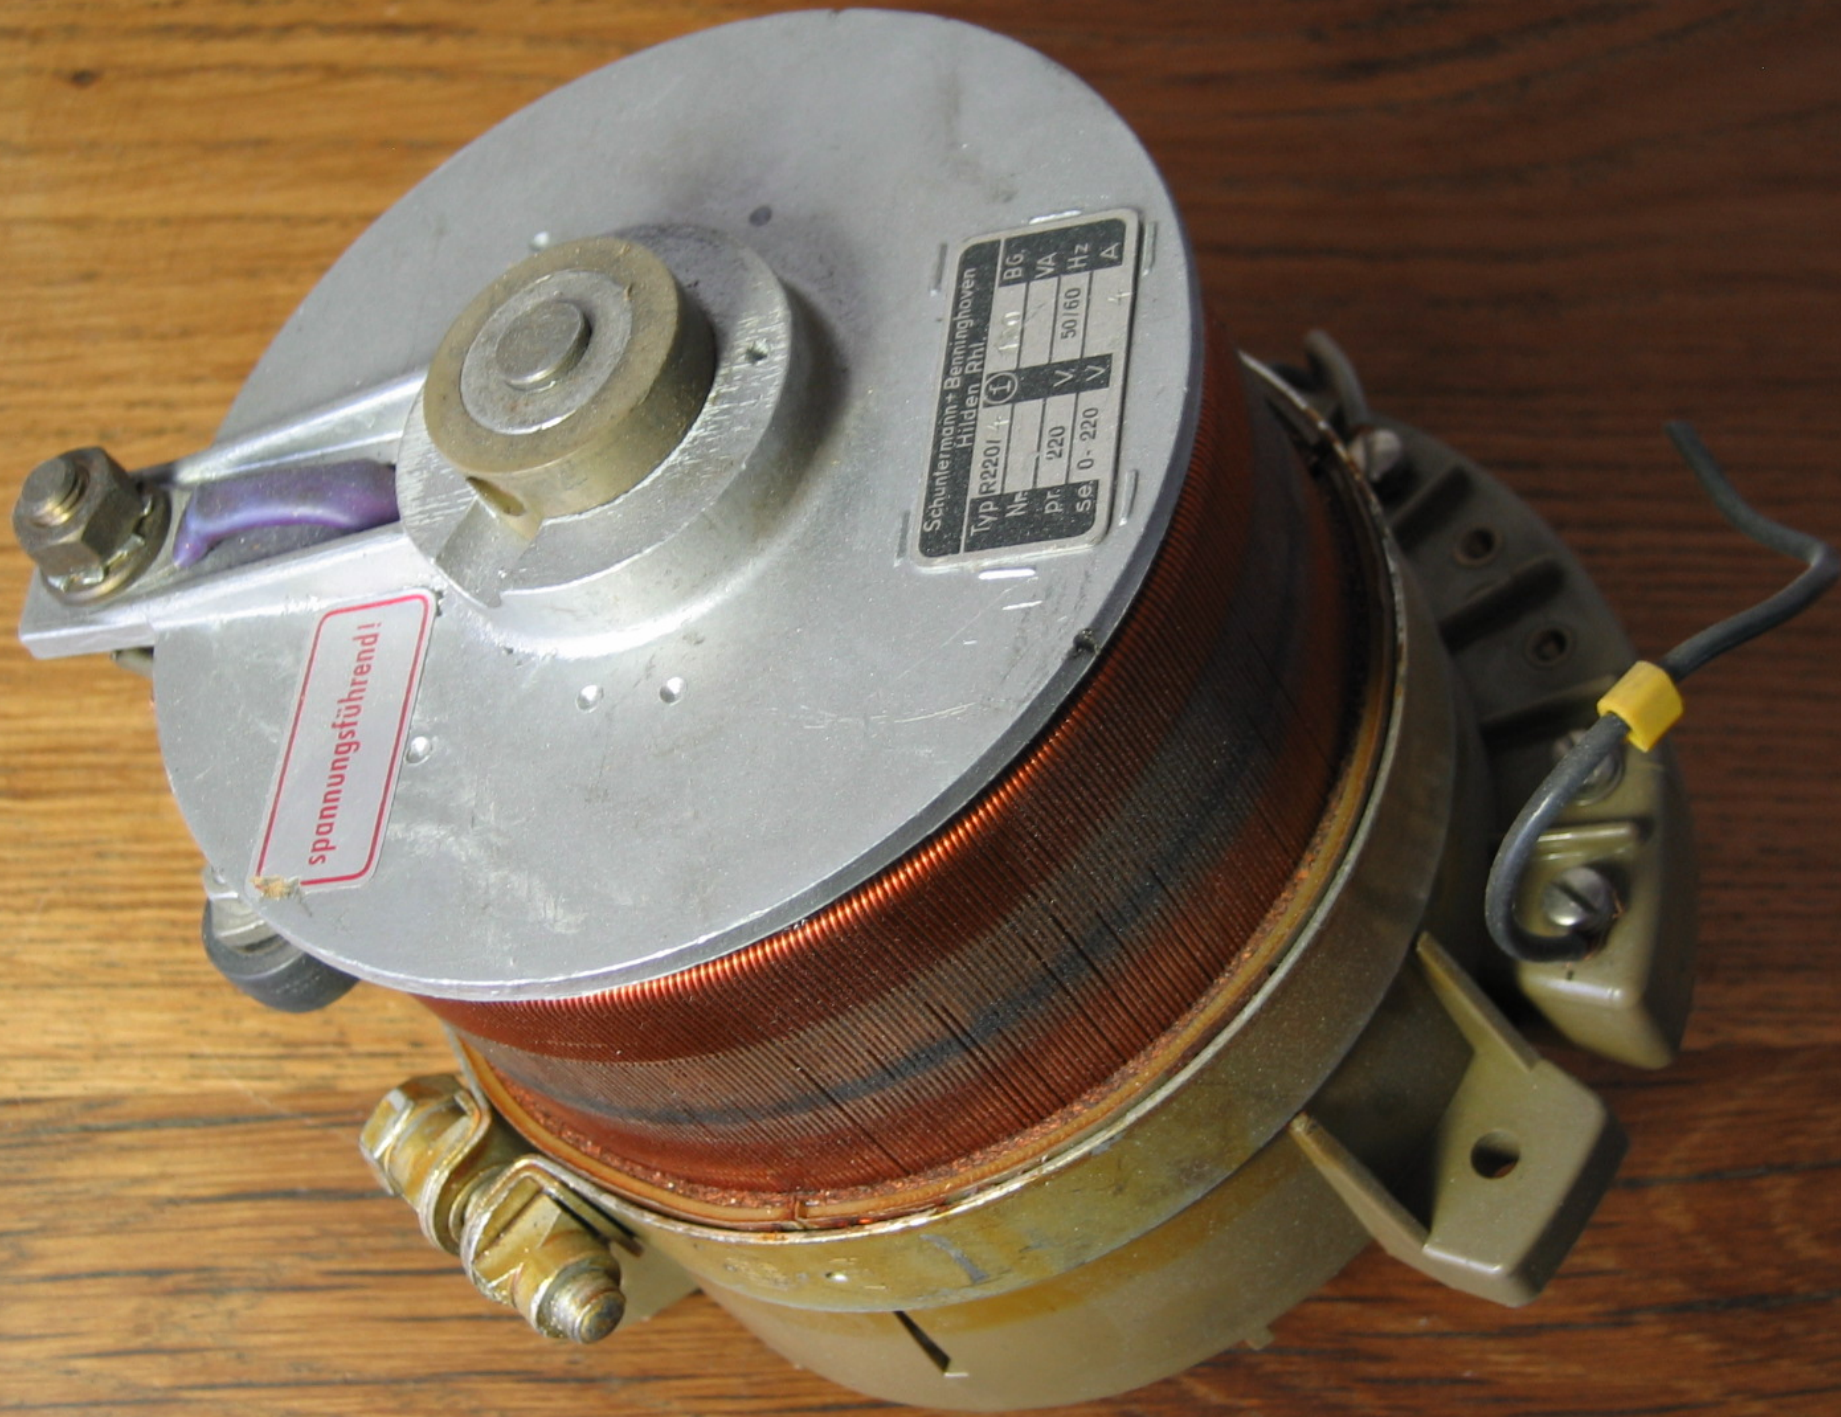

spannungsführend!

Schunfermann + Benninghoven Hilden Rhl.							
Typ	R2201	f	f	0	BG		
Nr.						VA	
Pt.	220	V	50/60	Hz			
Se.	0-220	V					A

ugsführend!

Schunfermann + Benninghoven
Hilden, Rhl.

Typ R2201/4

Nr.

pr.

50

220

0 - 220

①

V_i

V

100

50/60

BG,

VA


Hz

A


sführend!

Schuntermann + Benninghoven
Hilden Rht.

Typ R2201 / 4	1	10	BG
Nr			VA
pr 220	V	50/60	Hz
Se 0-220	V	4	A

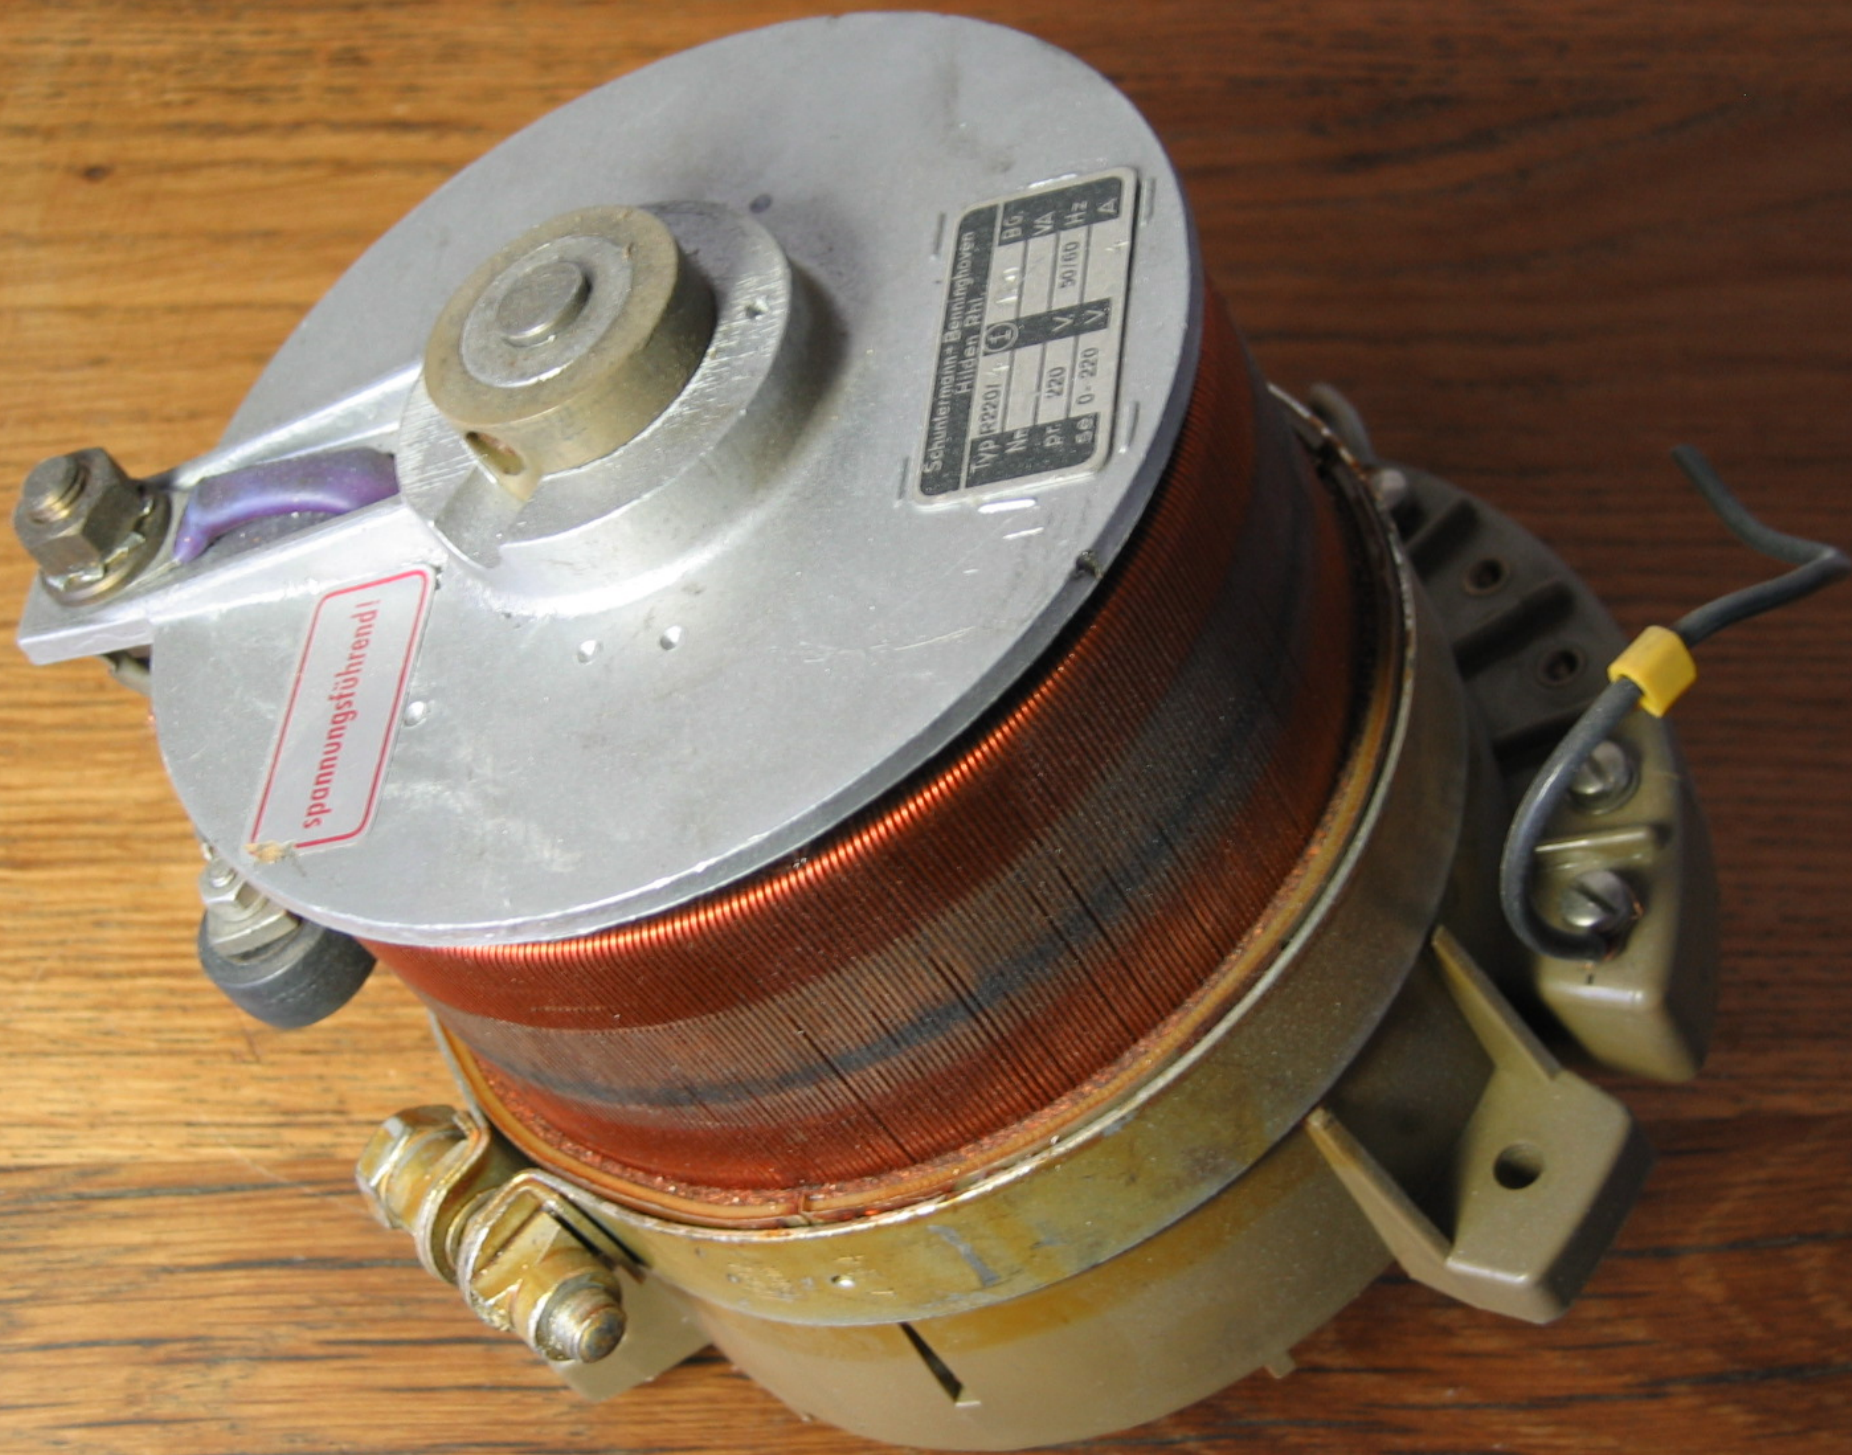

Schuler mann + Benninghoven			
Hiden (Ph)			
Typ	R2201	I	BG
Nr.			VA
pr.	220	V	50/60 Hz
50	0-220	V	A

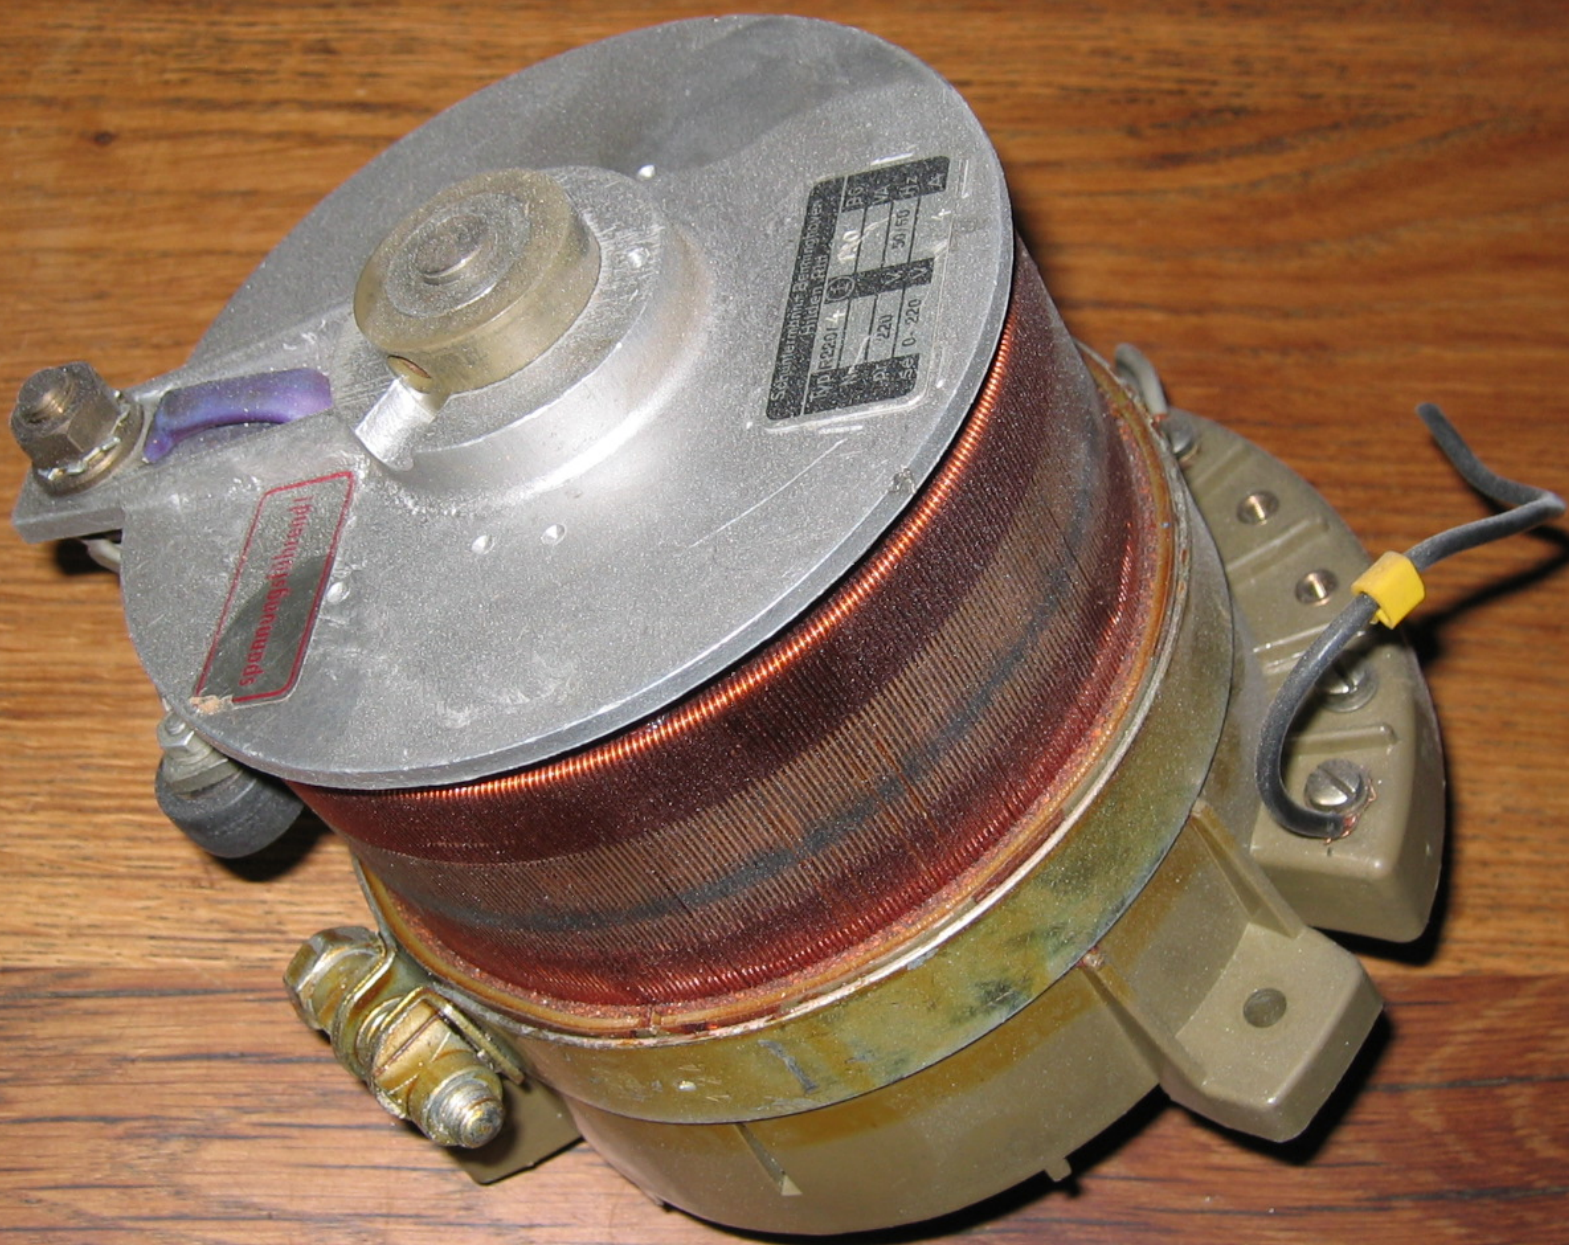































































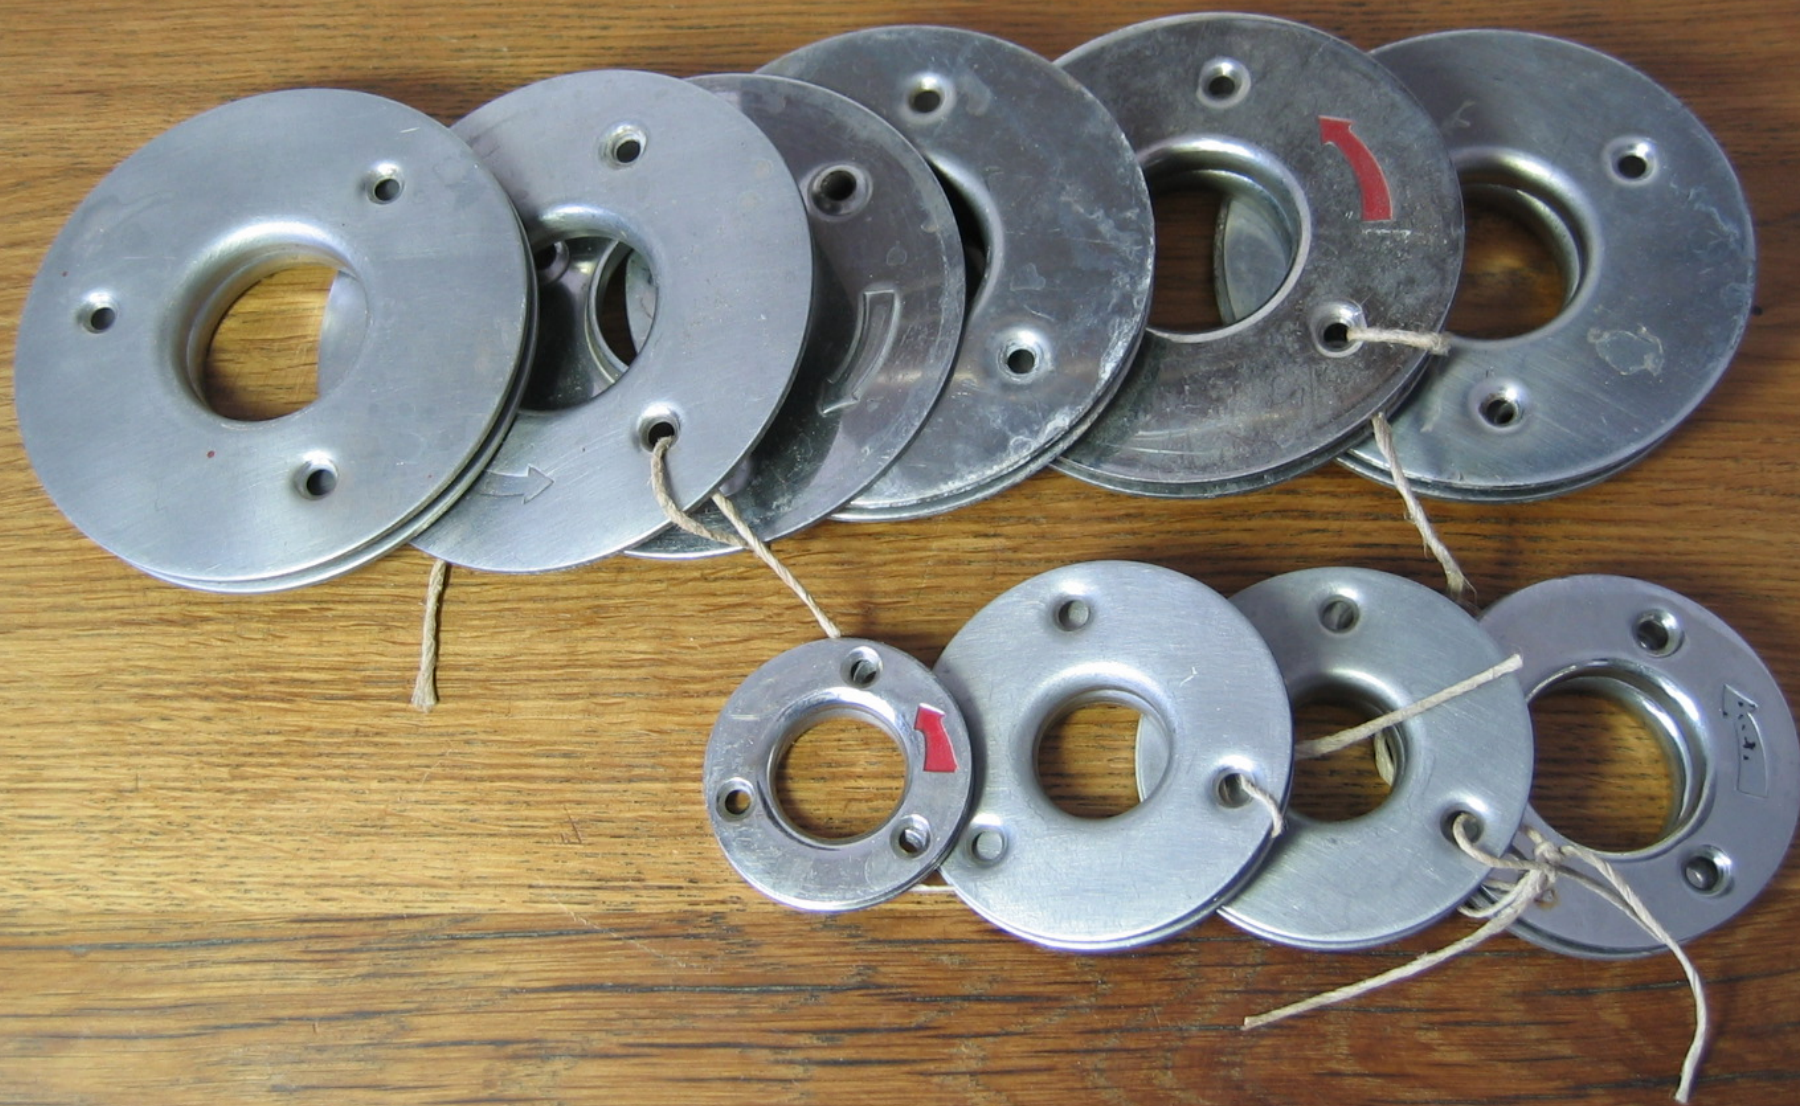







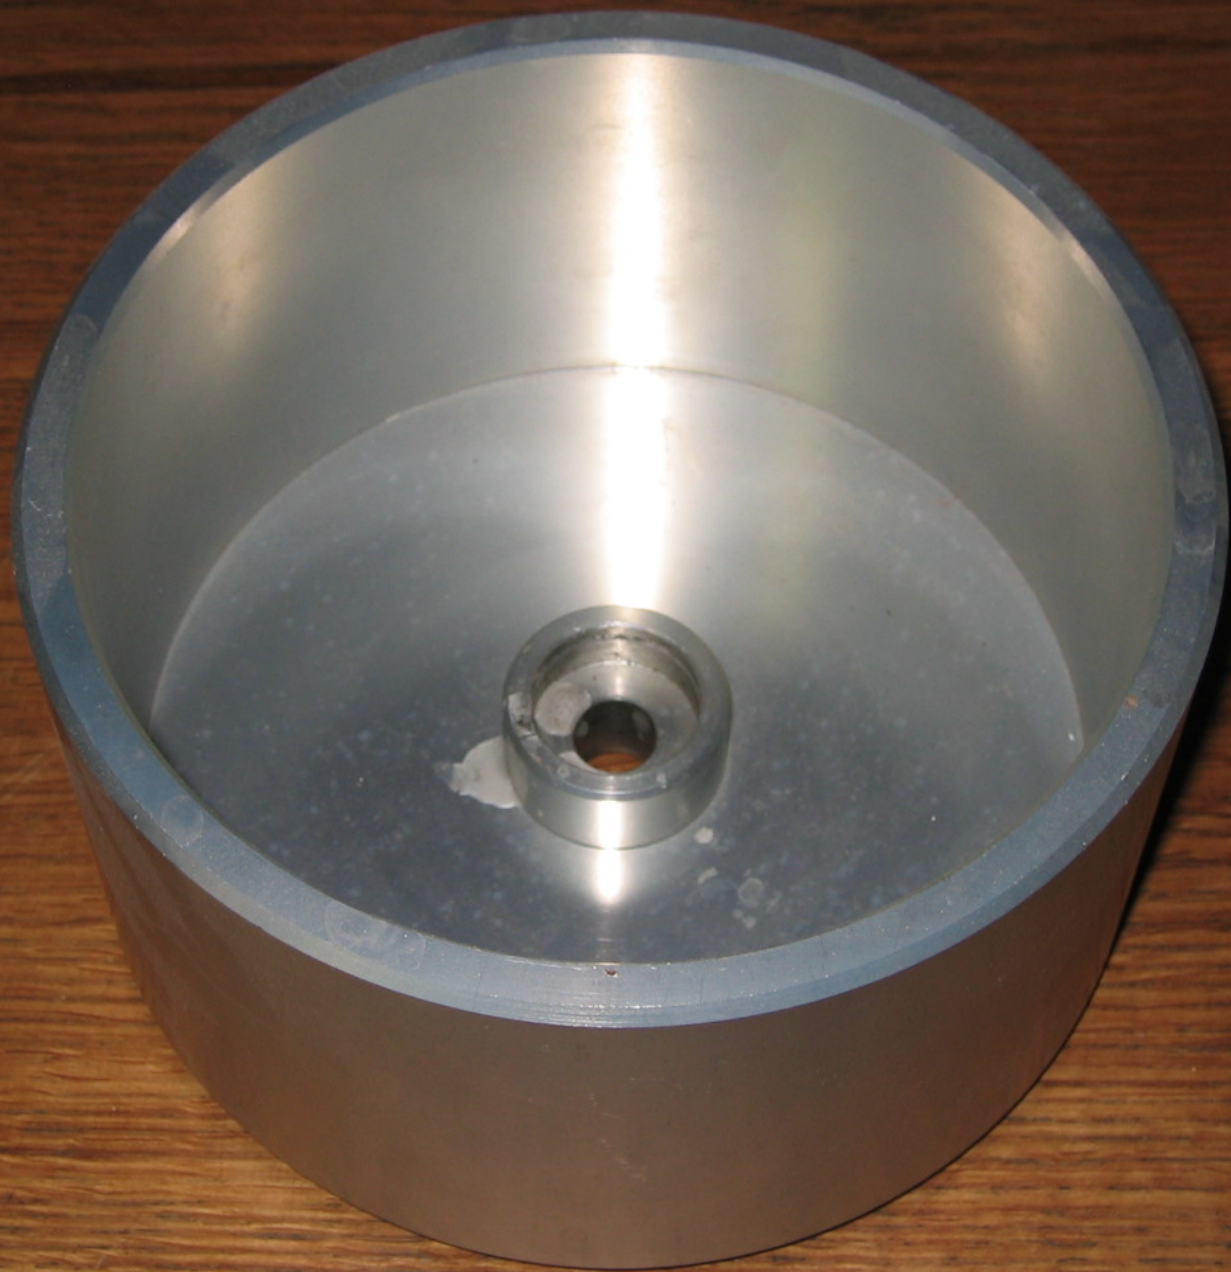





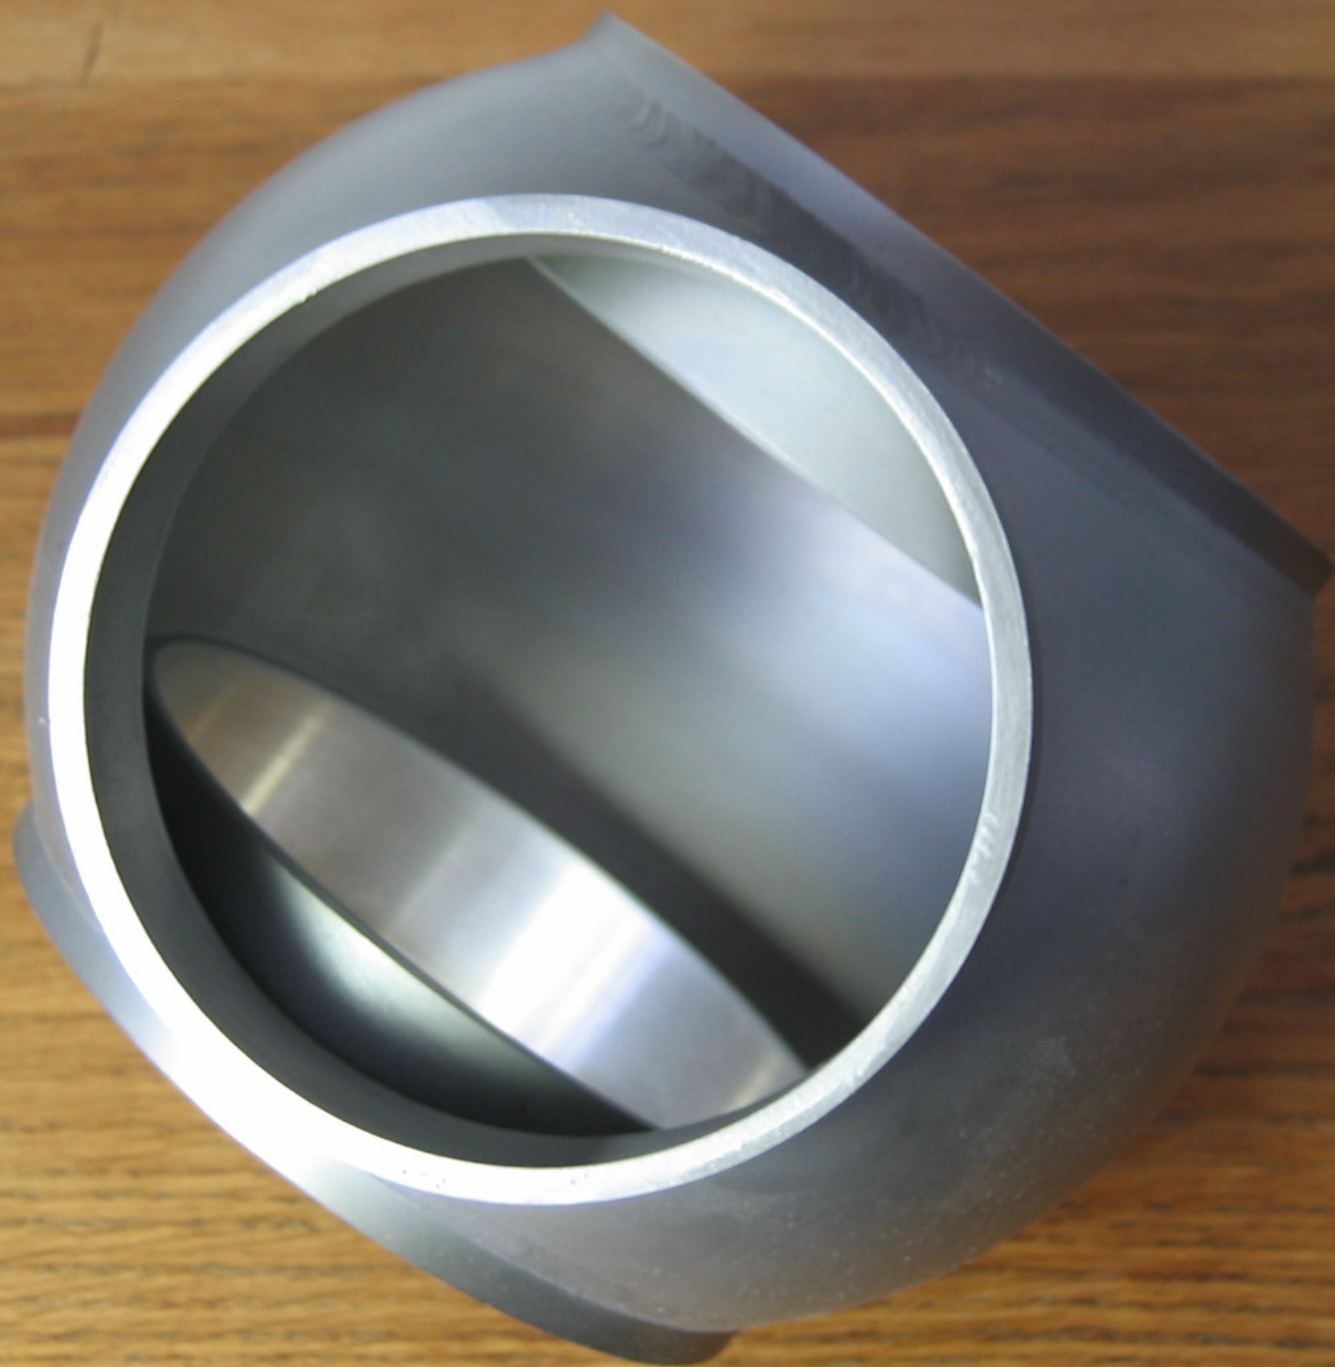

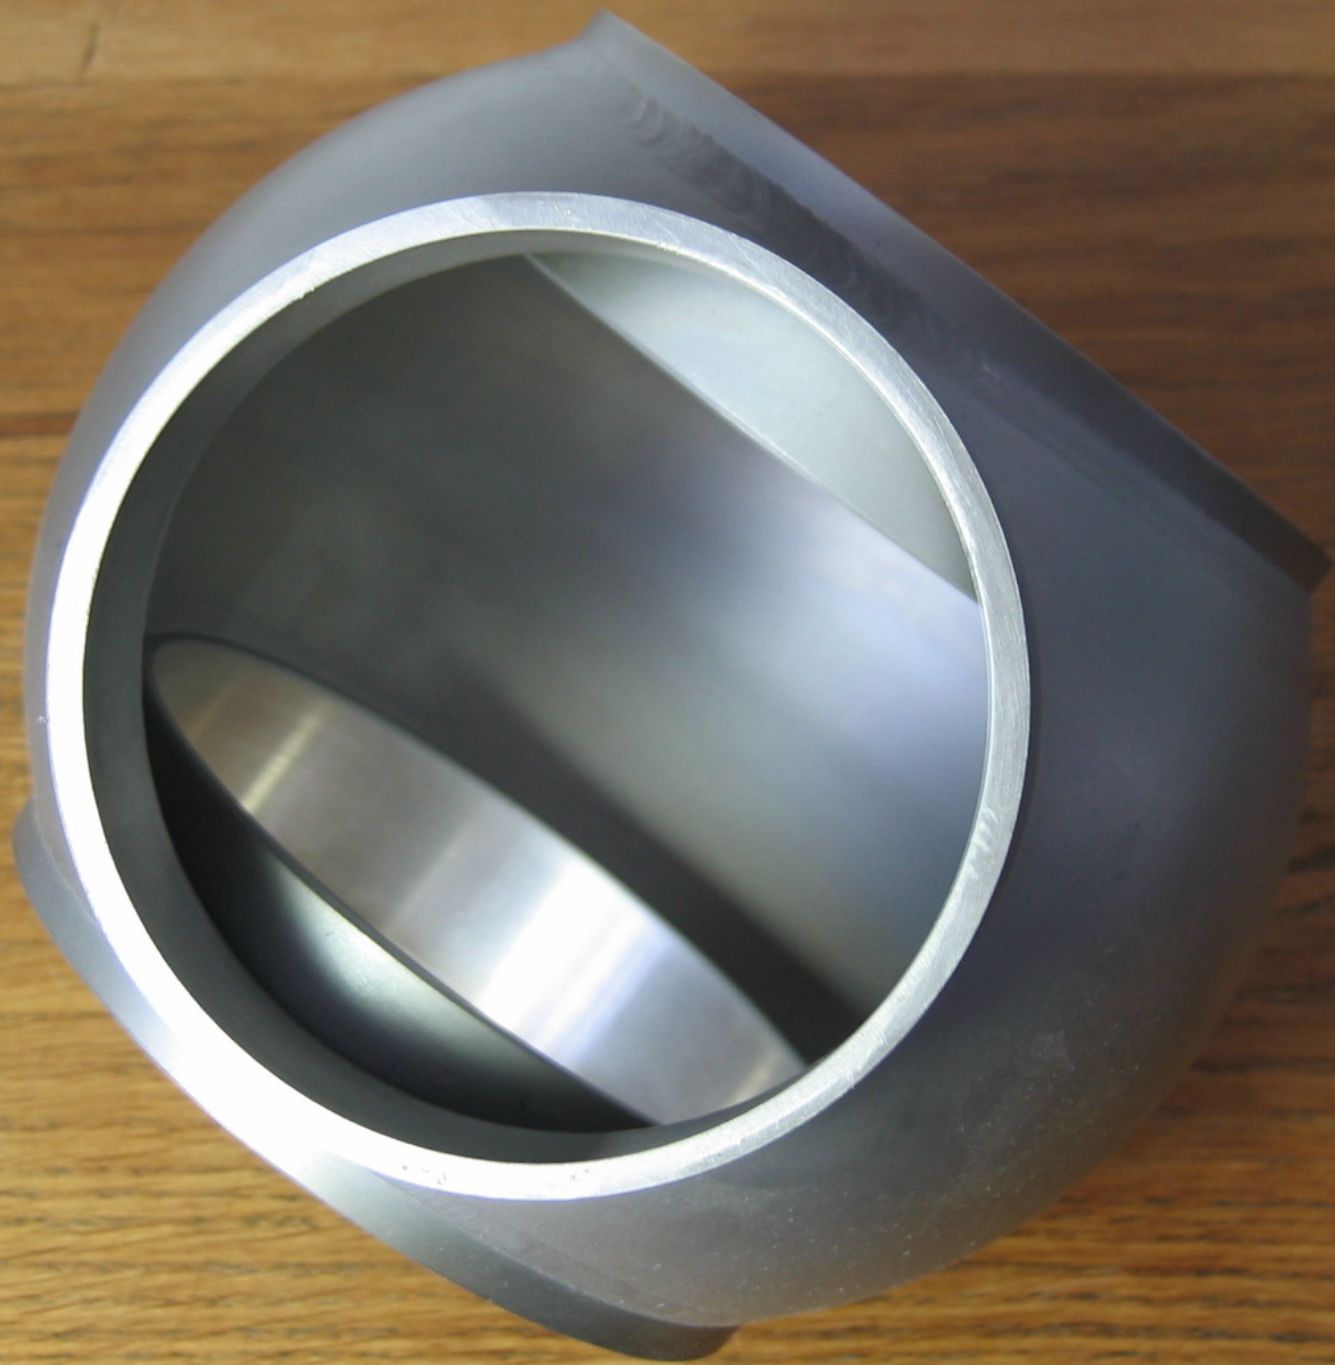















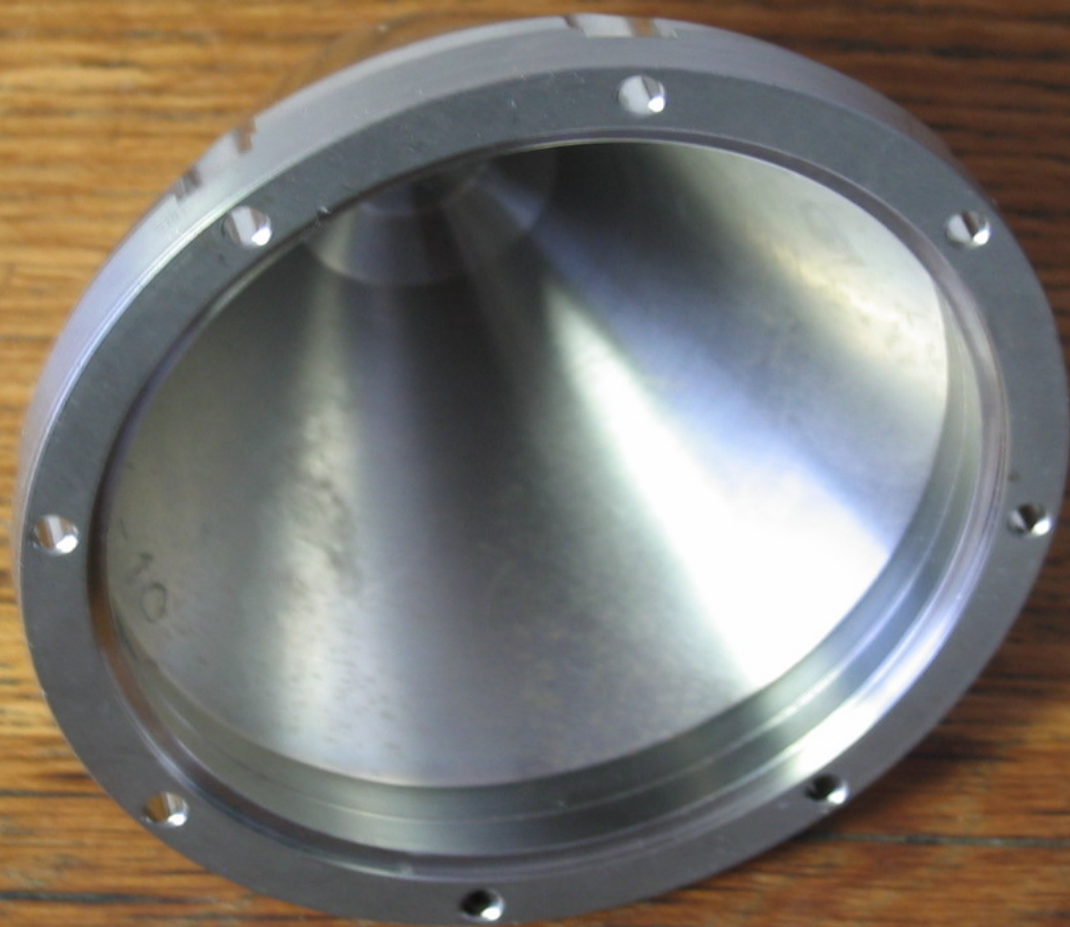





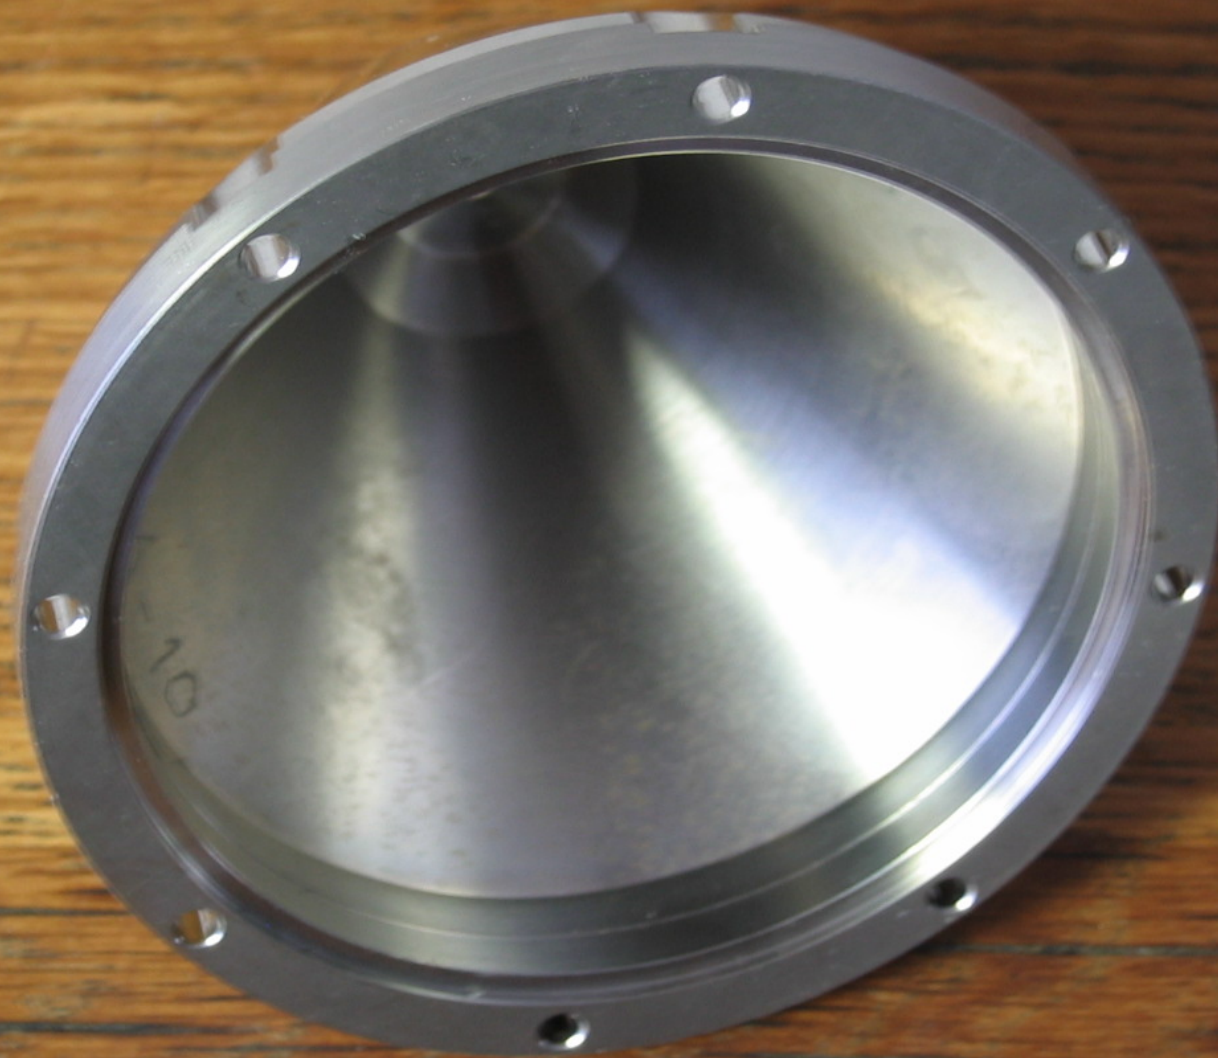










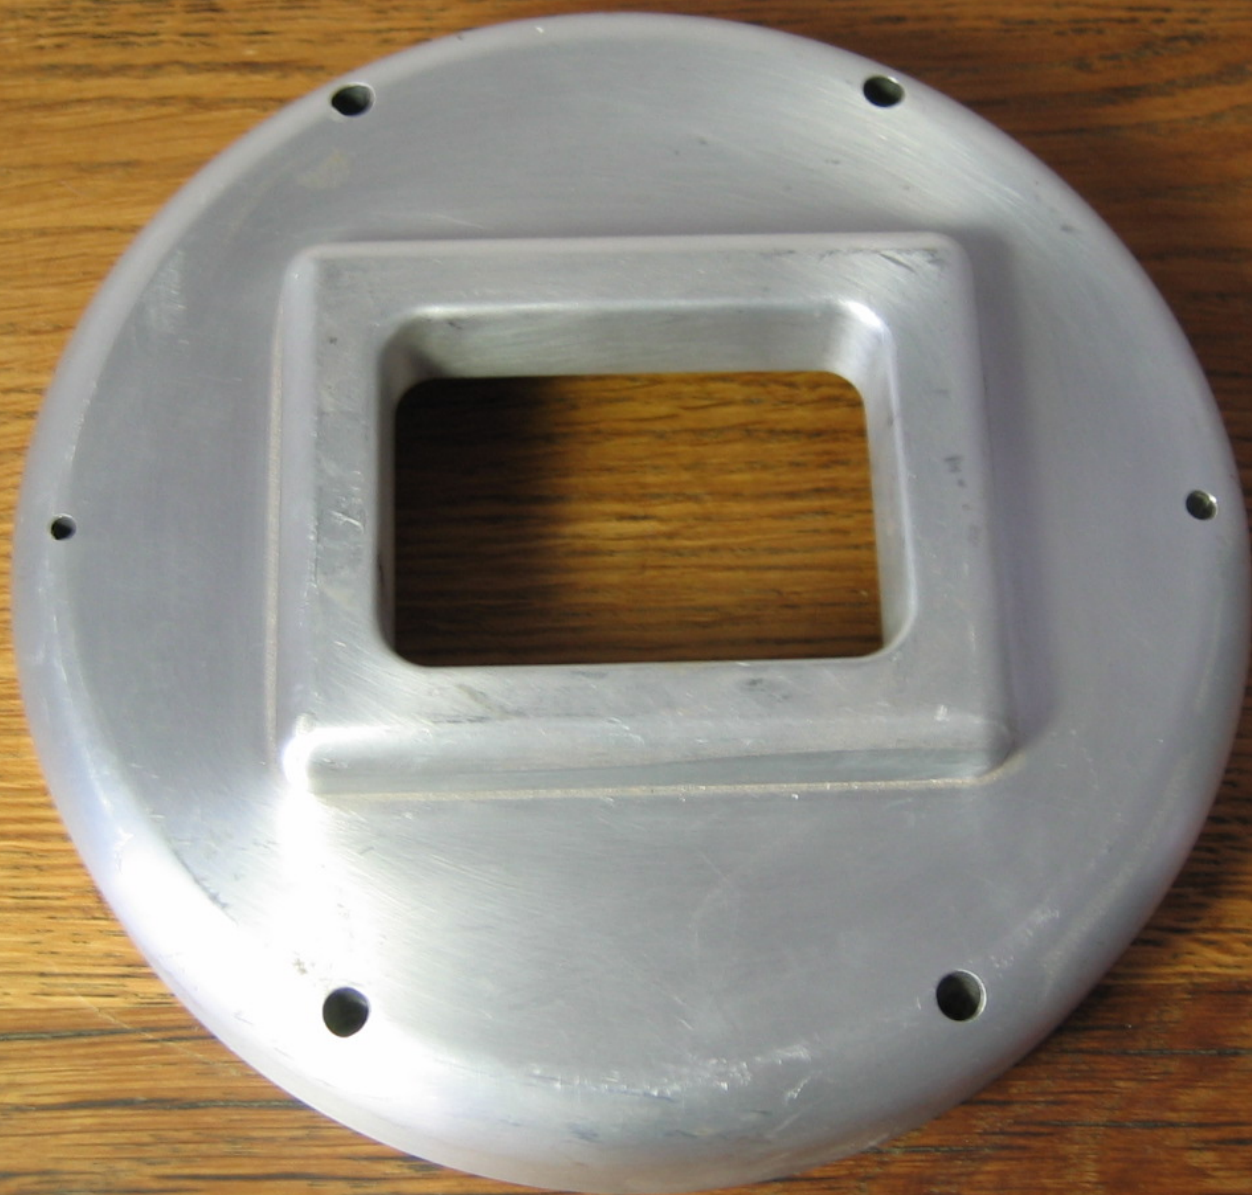















































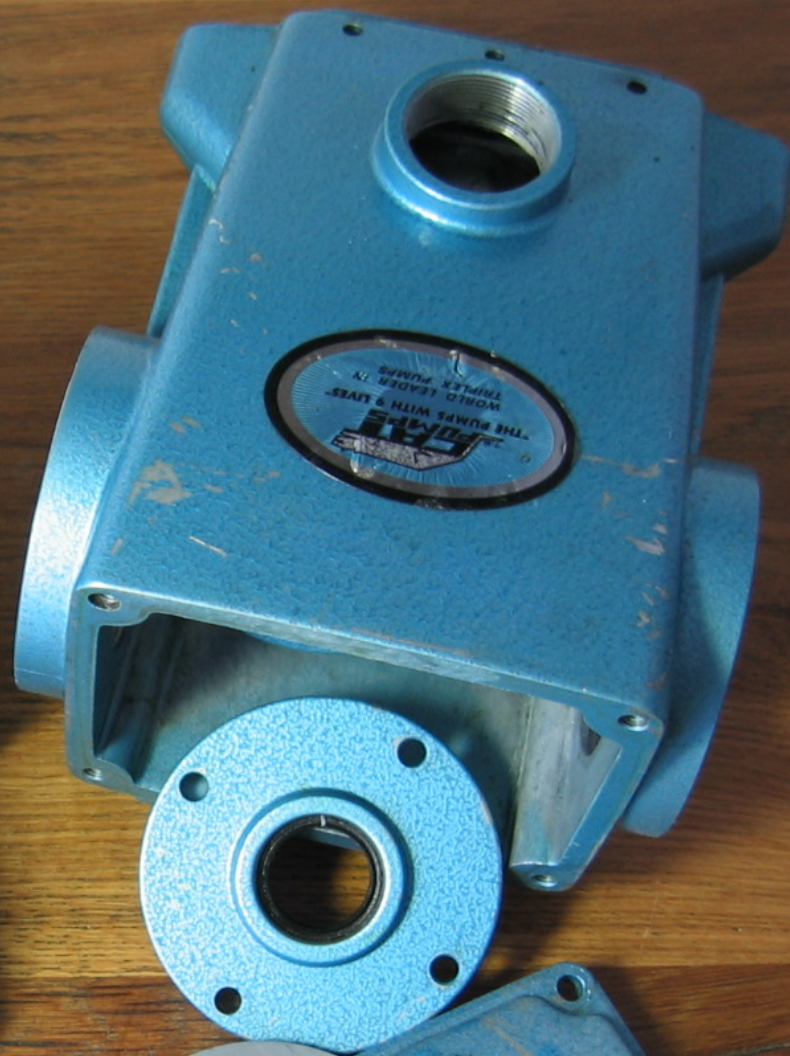

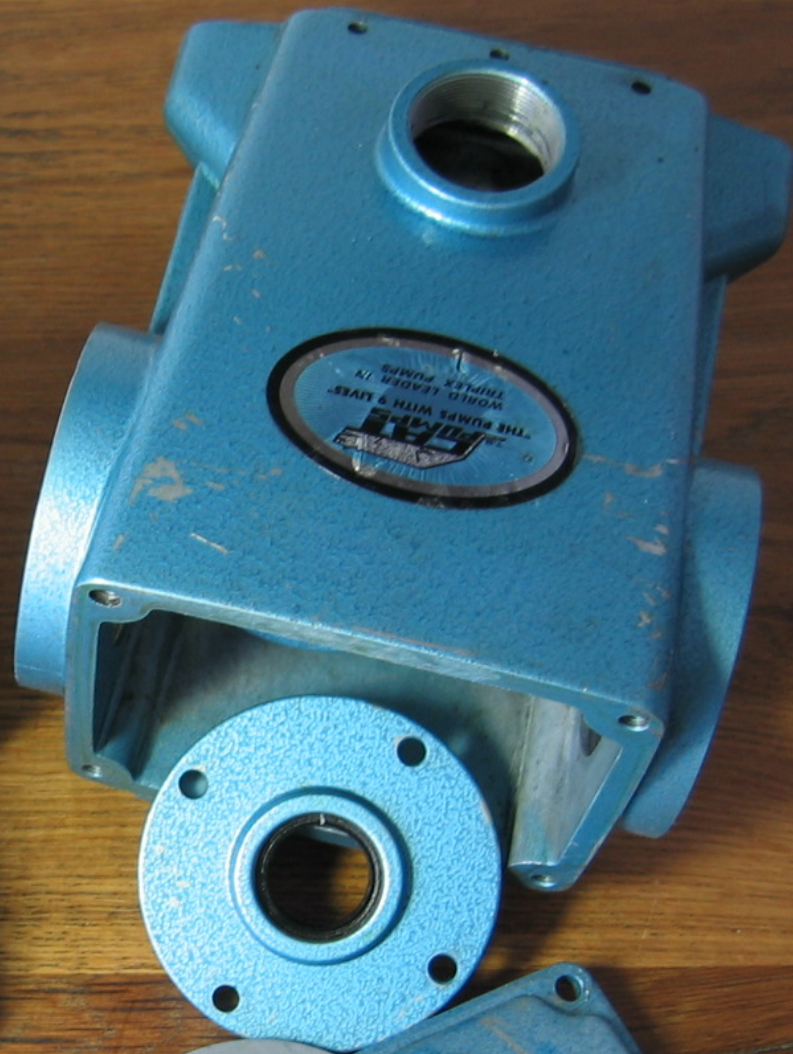























































VISITEKAARTEN



ENVELOPPEN



VISITEKAARTEN







ENVELOPPEN





7505550
5555


CONNECTOREN
TOEGEBORVEN & KOELELEMENTEN
PRINTPLAATMATERIALEN
BEHUIZINGEN
DI-GEAR
BATTERIJEN & ACCU'S
ELEKTRONICA BOUWREKETTEN
MEET- & TESTAPPARATUUR
PC & AUDIO/VIDEO-AANSLUITMATERIALEN
MICROFOONS & SPEAKERS
ENZ.

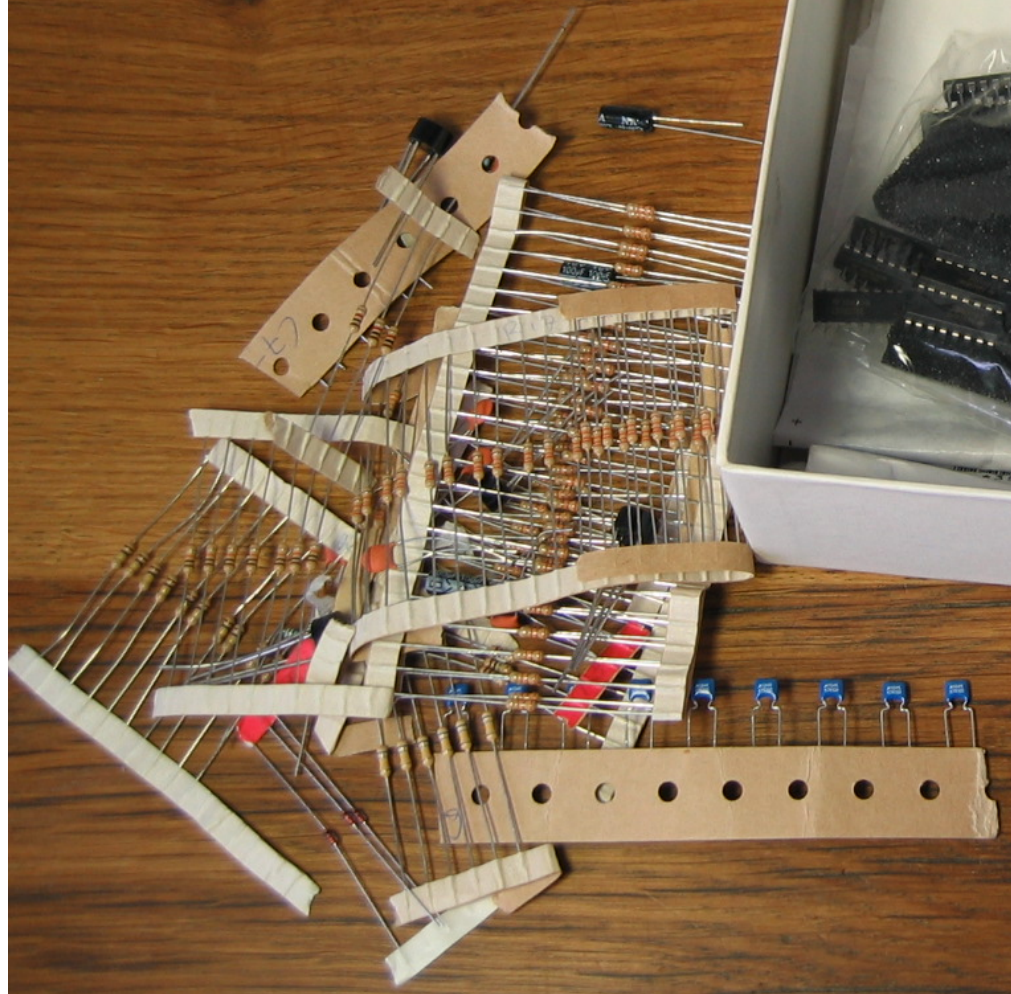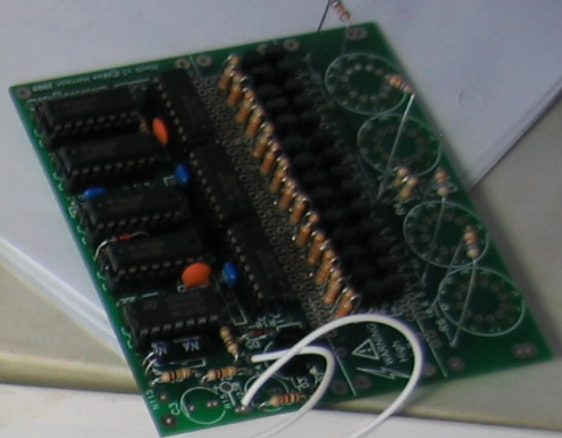

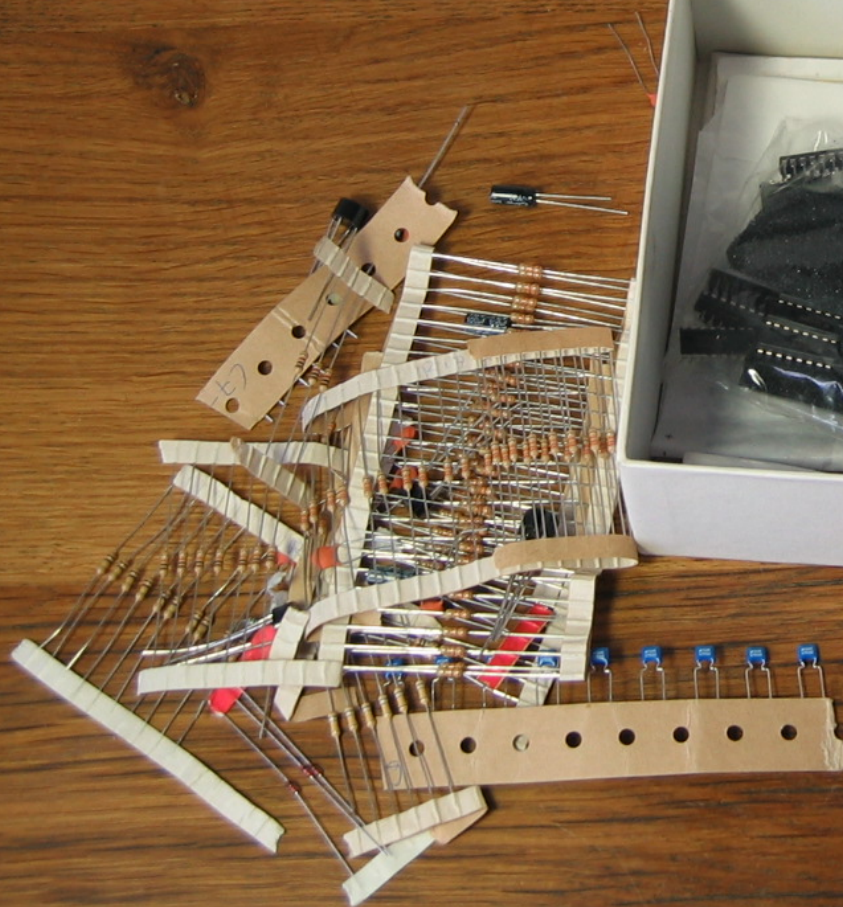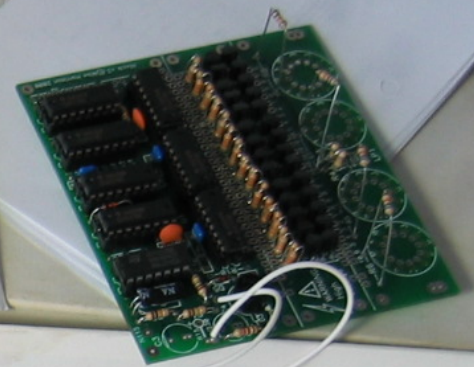

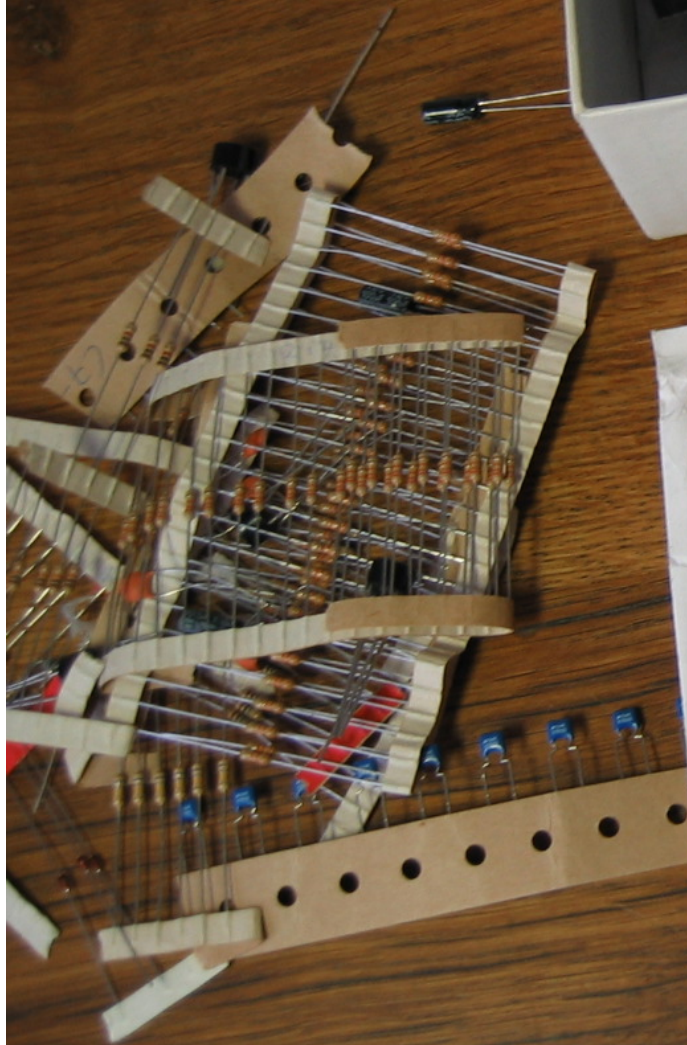

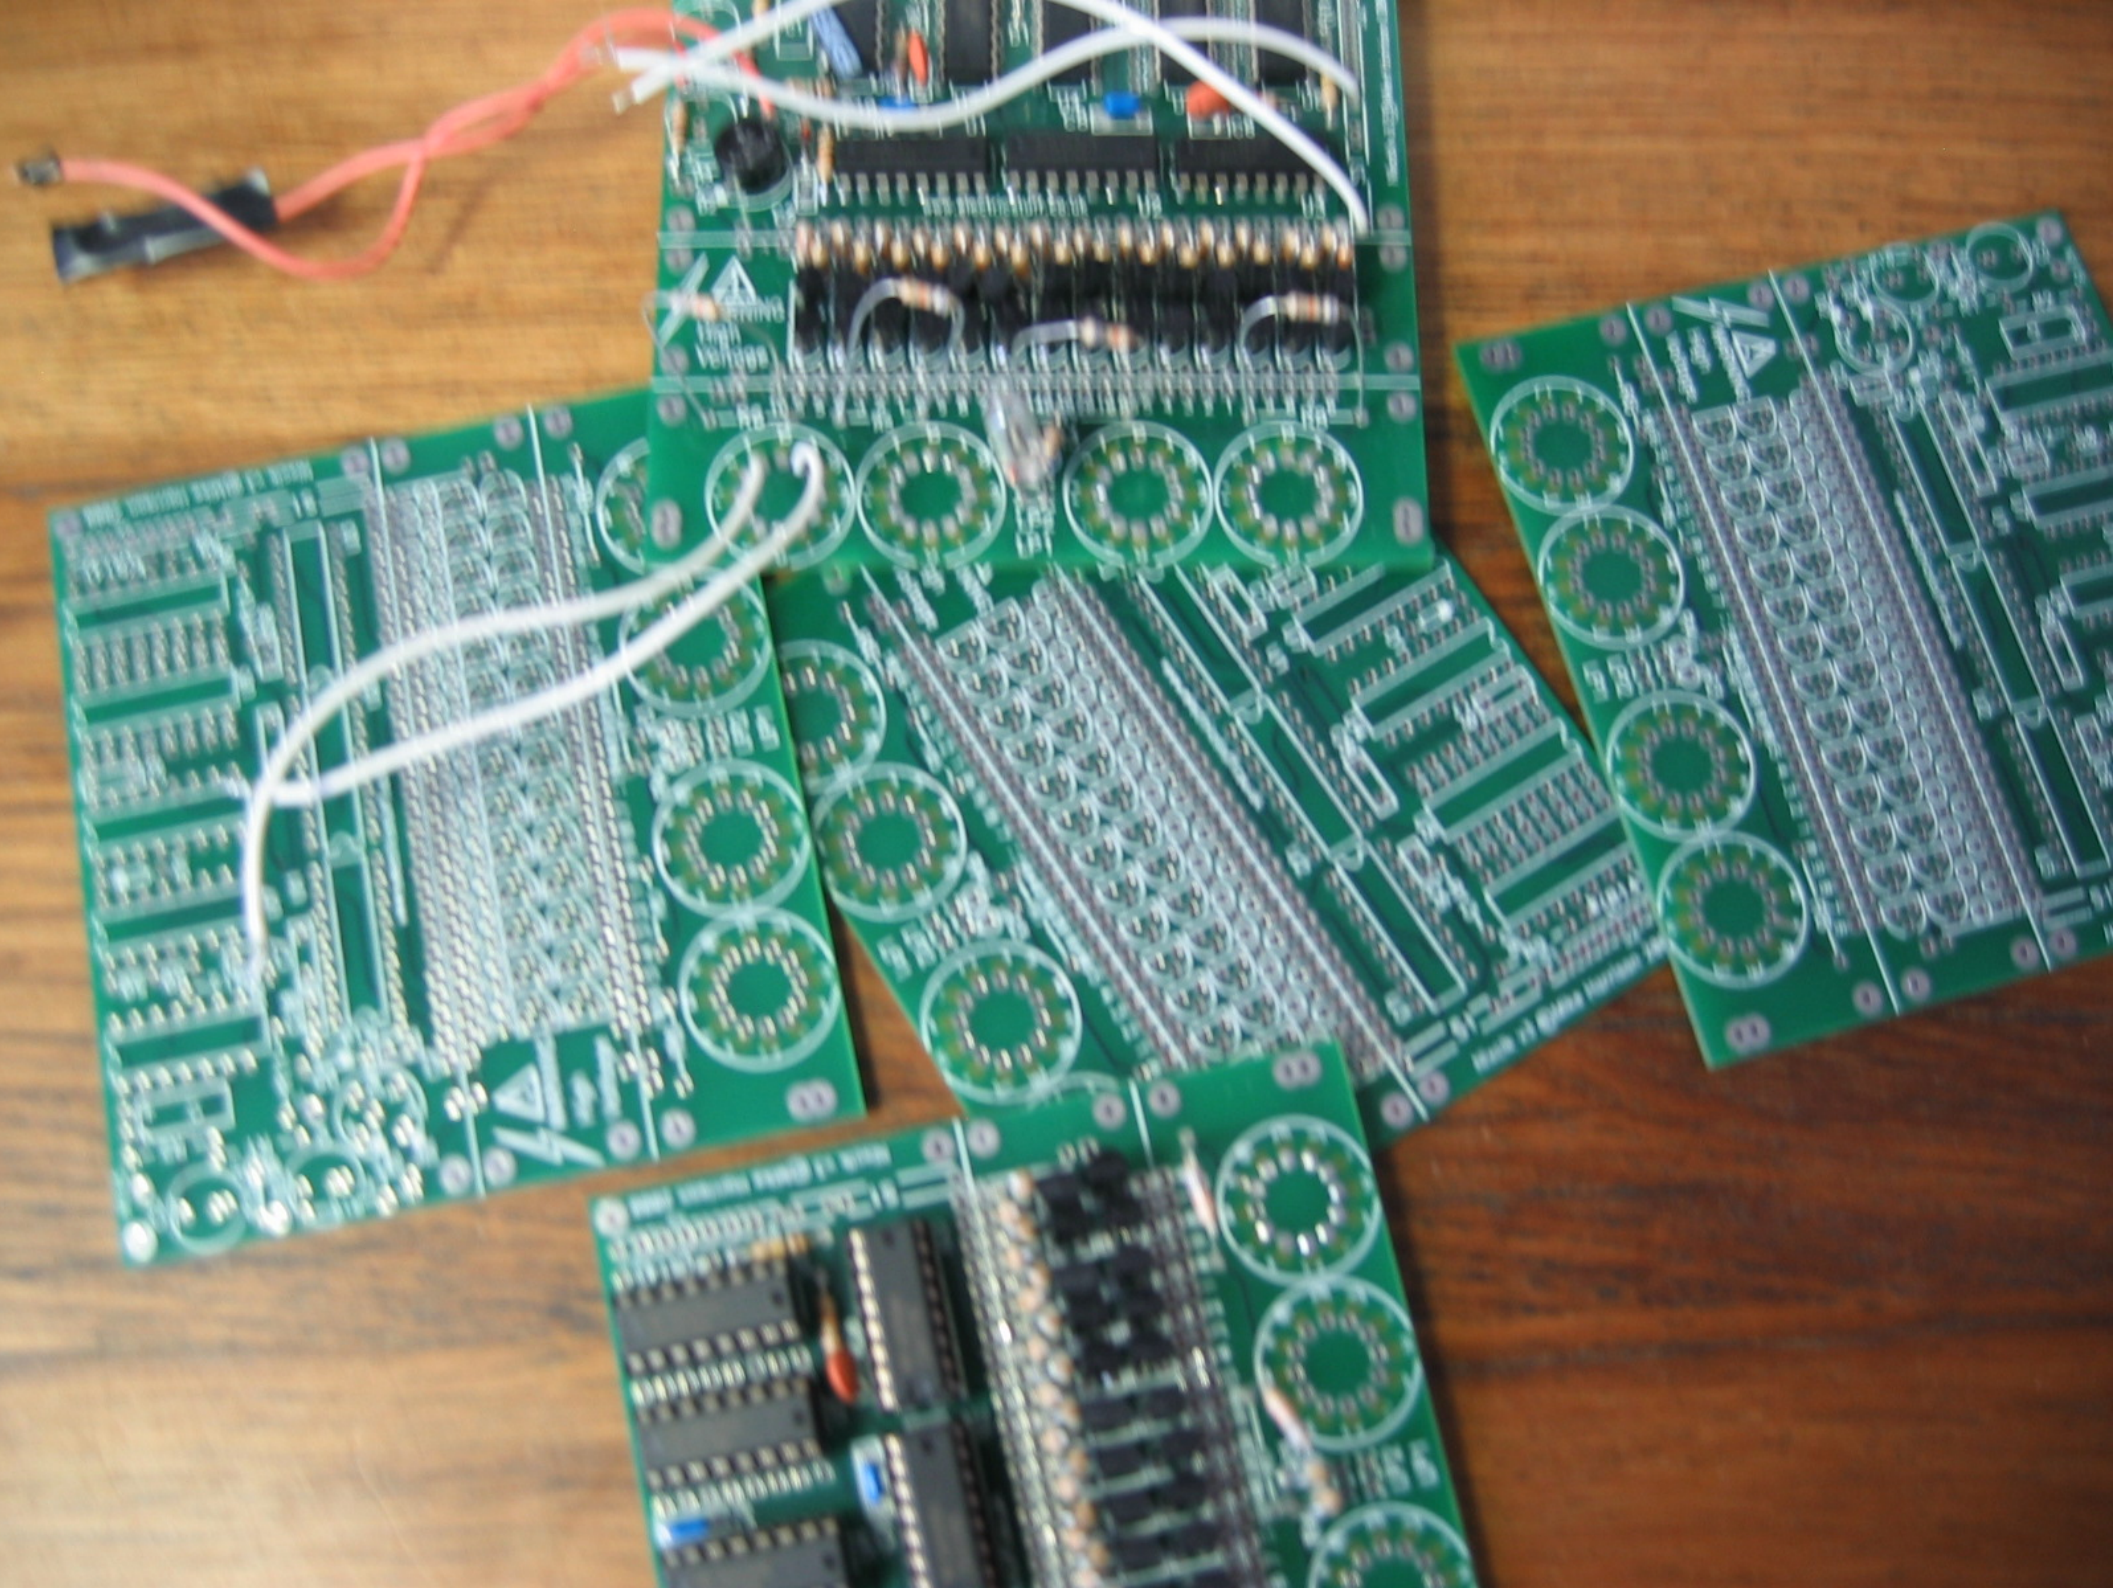


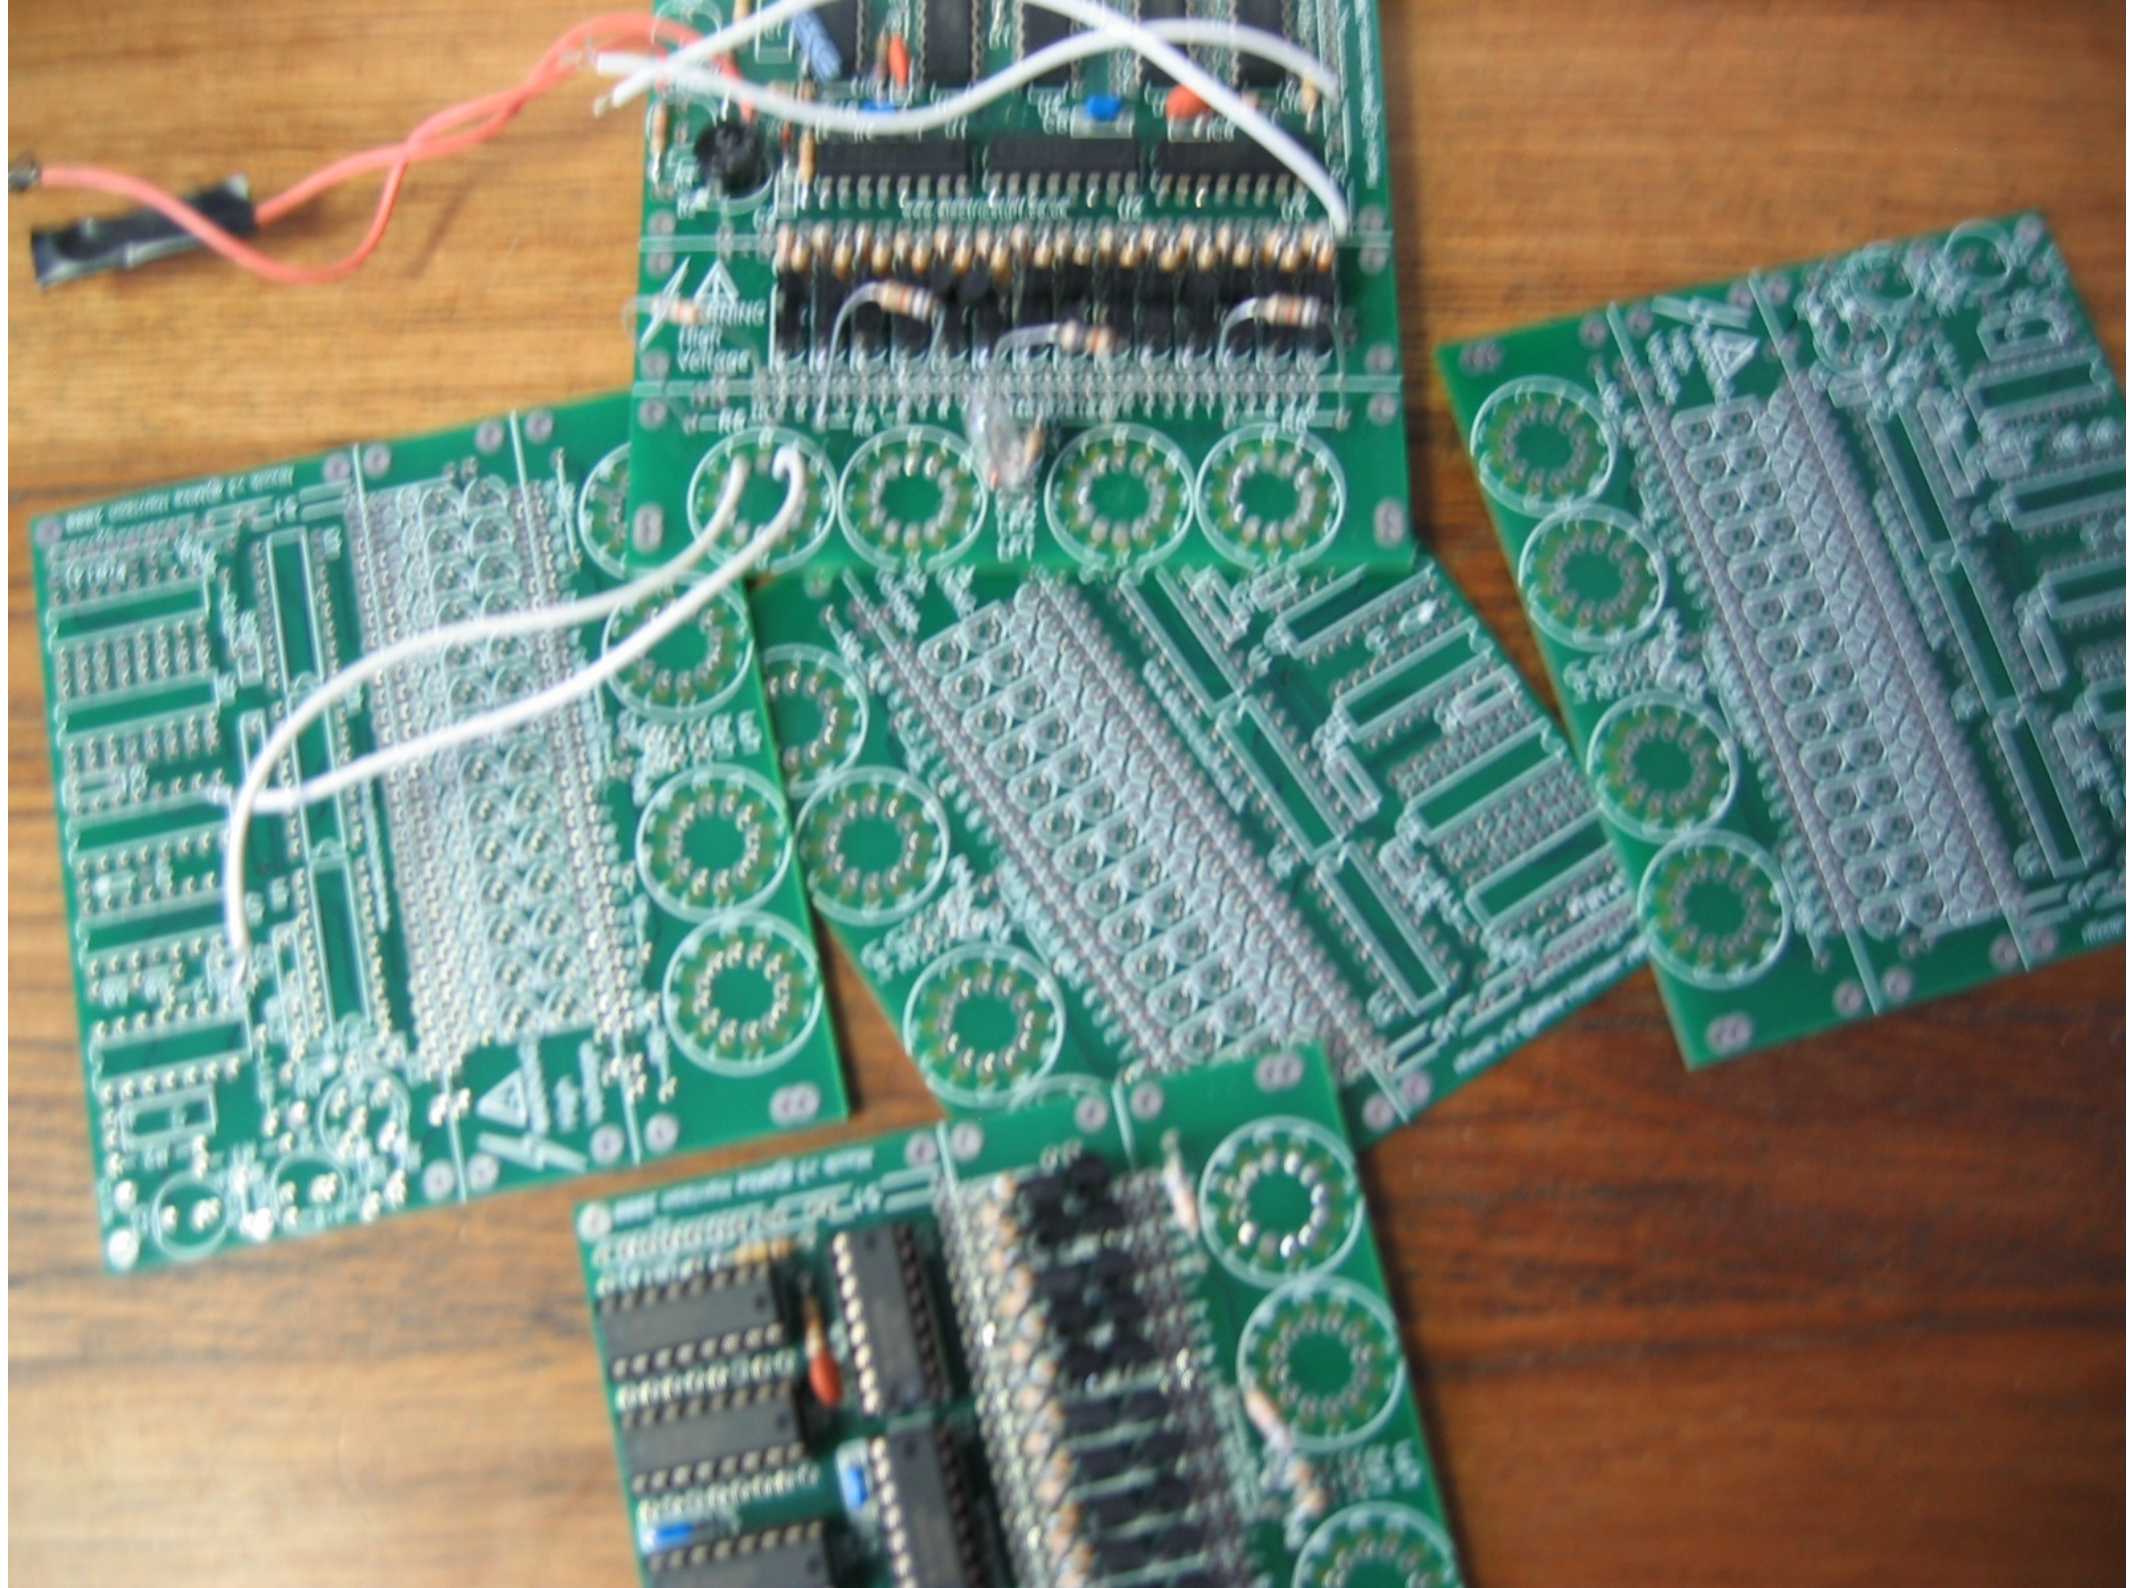

VISITEKAARTEN




ENVELOPPEN

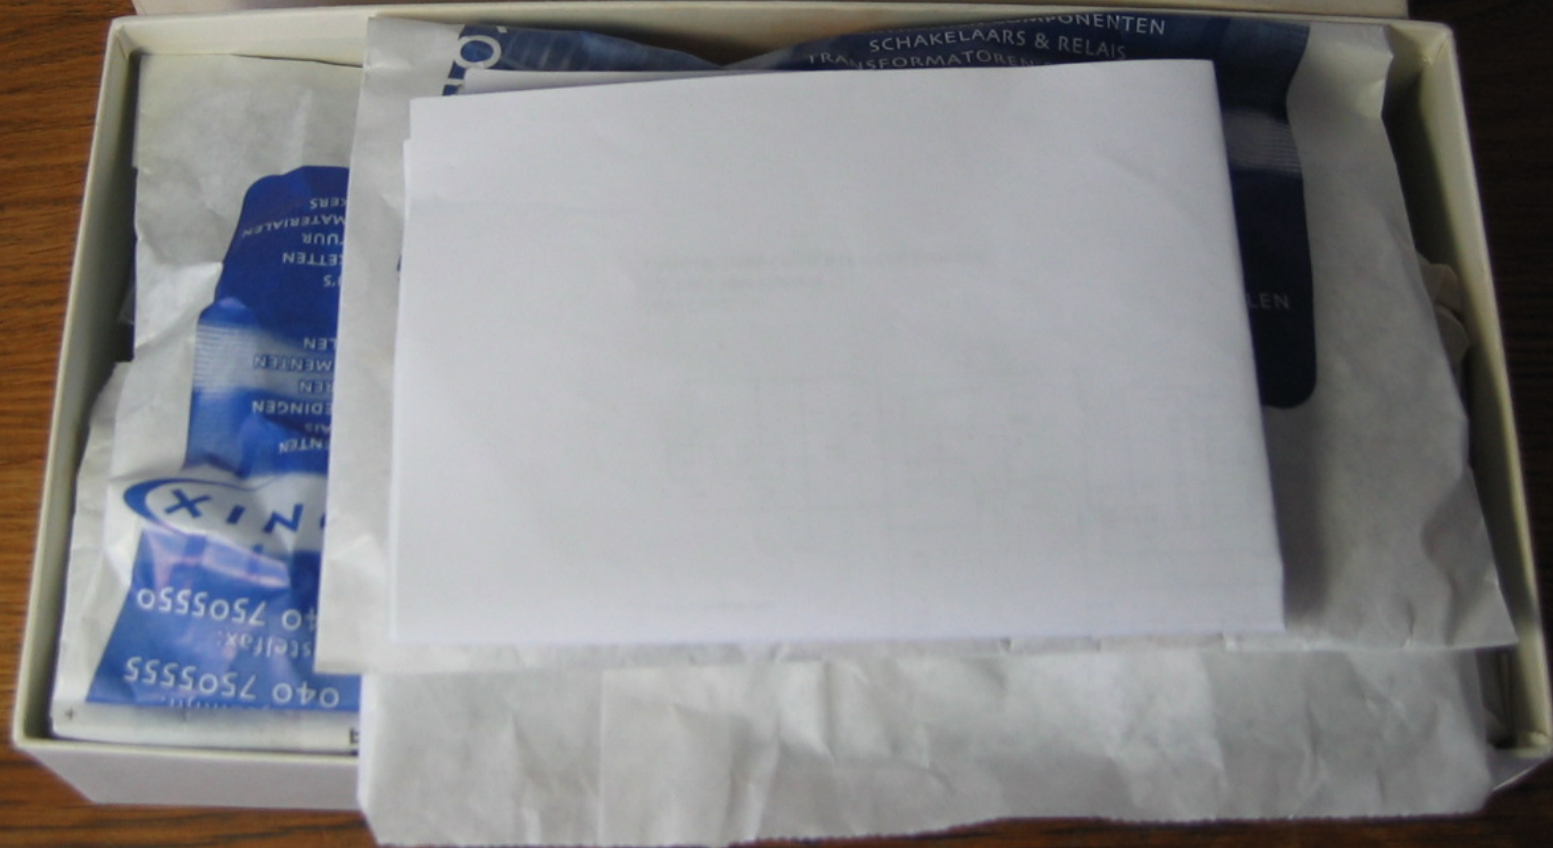

VISITEKAARTEN




ENVELOPPEN

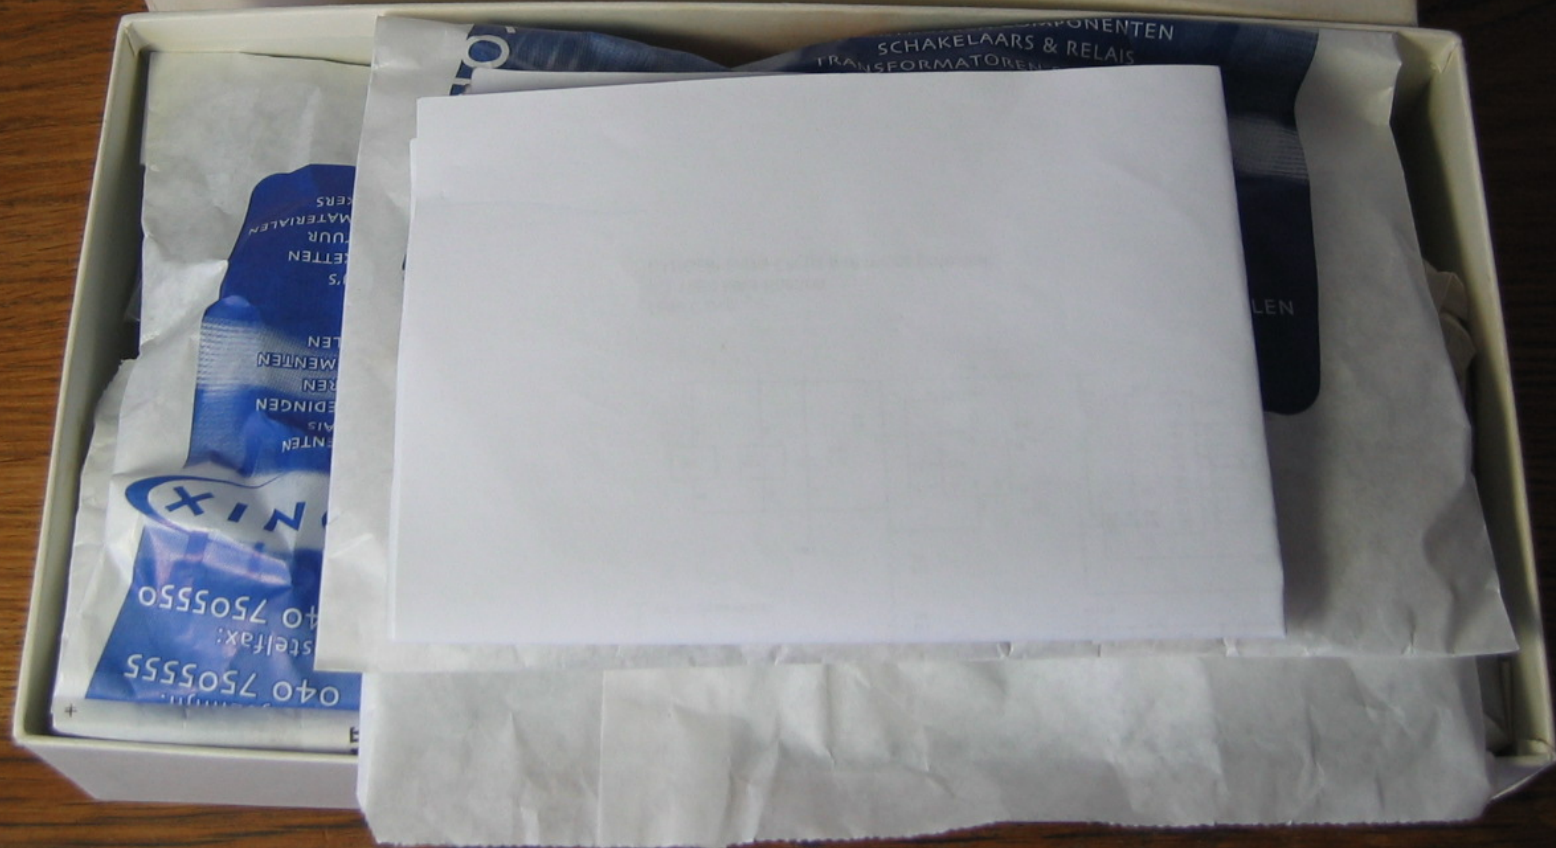

VISITEKAARTEN



ENVELOPPEN

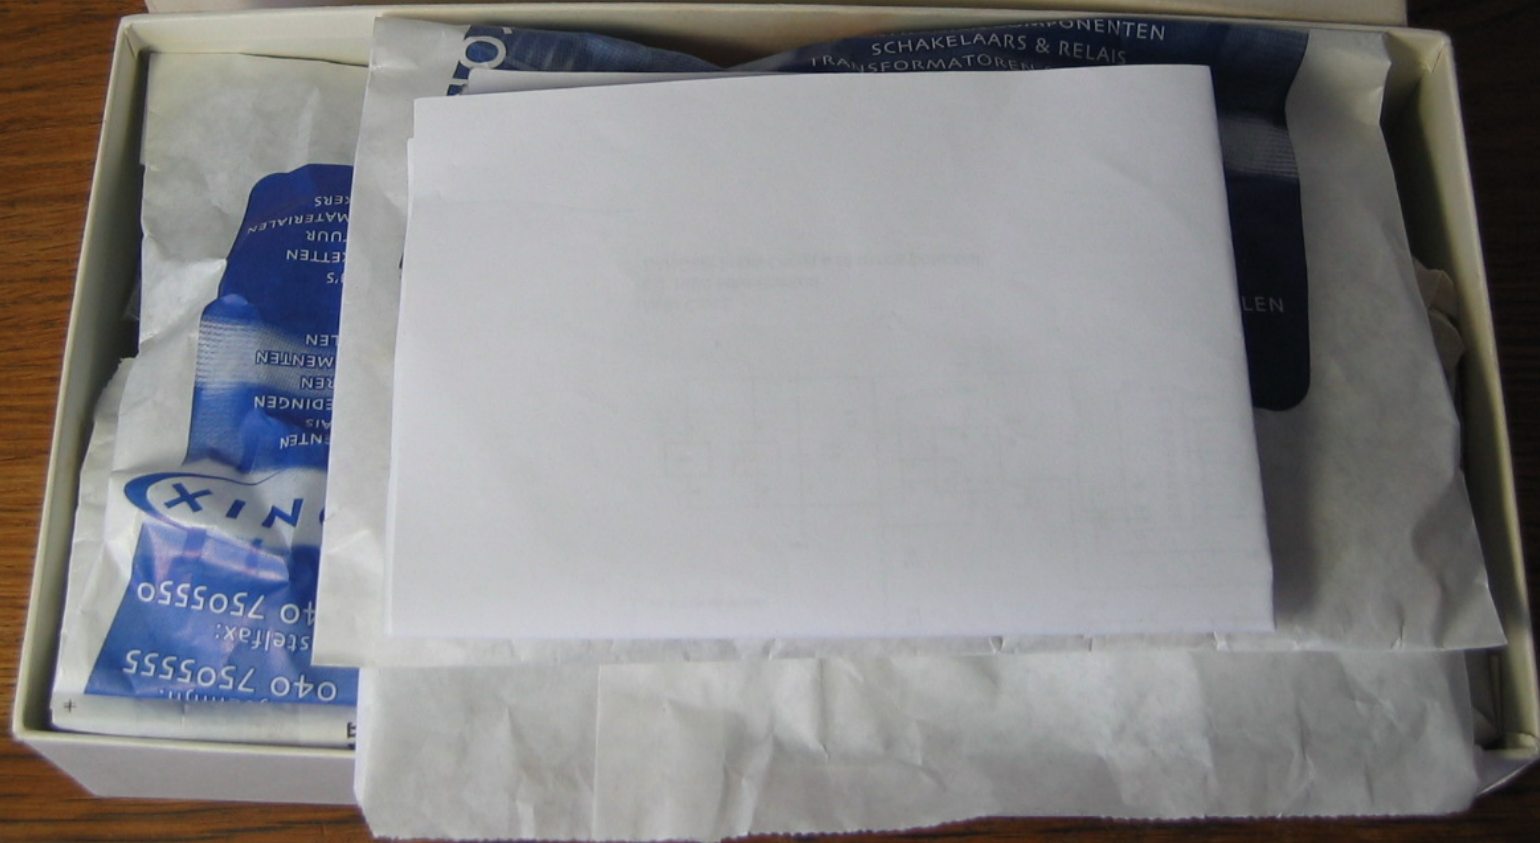


VISITEKAARTEN





ABC


1561


ENVELOPPEN

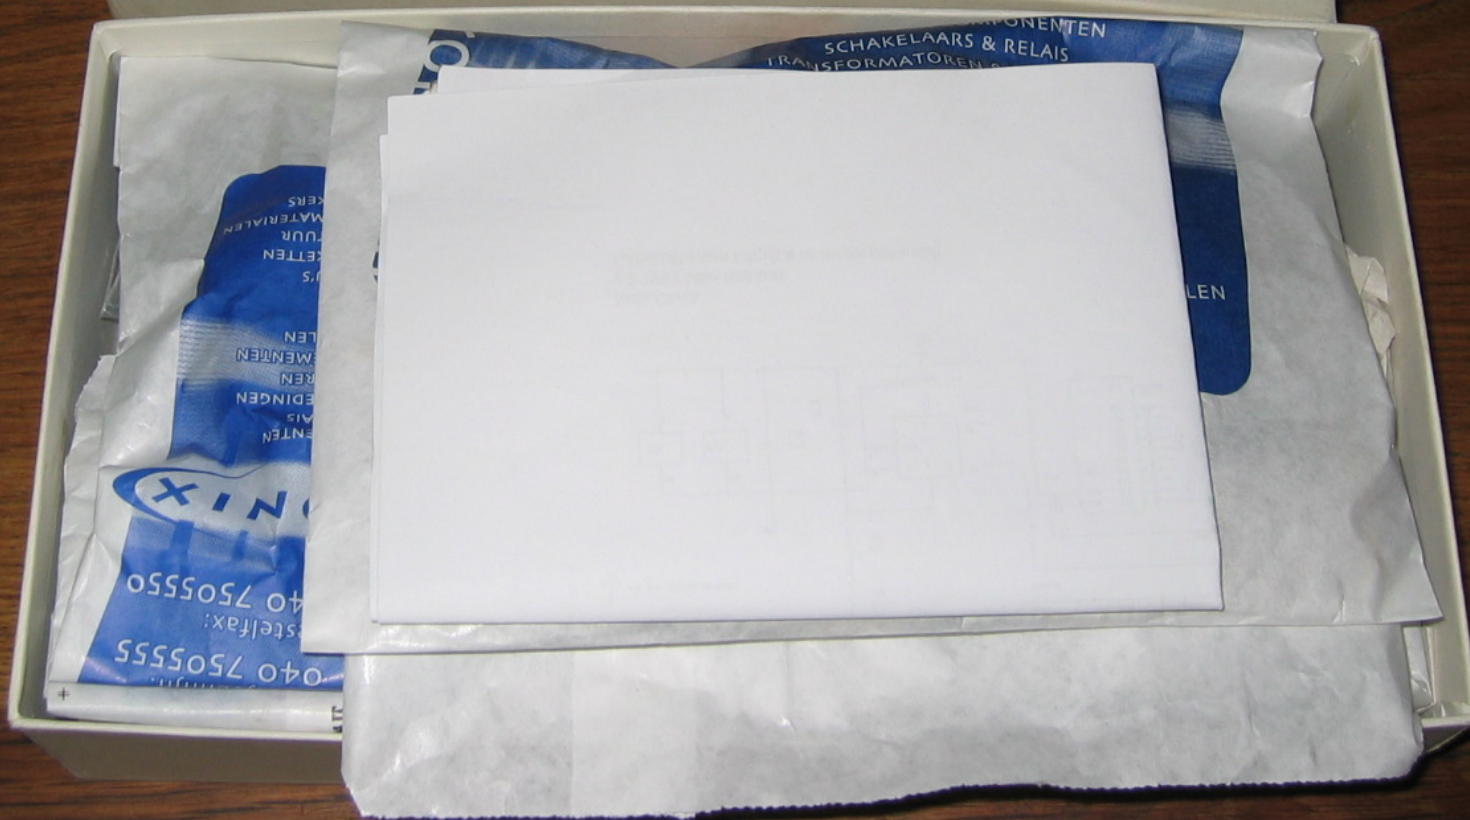


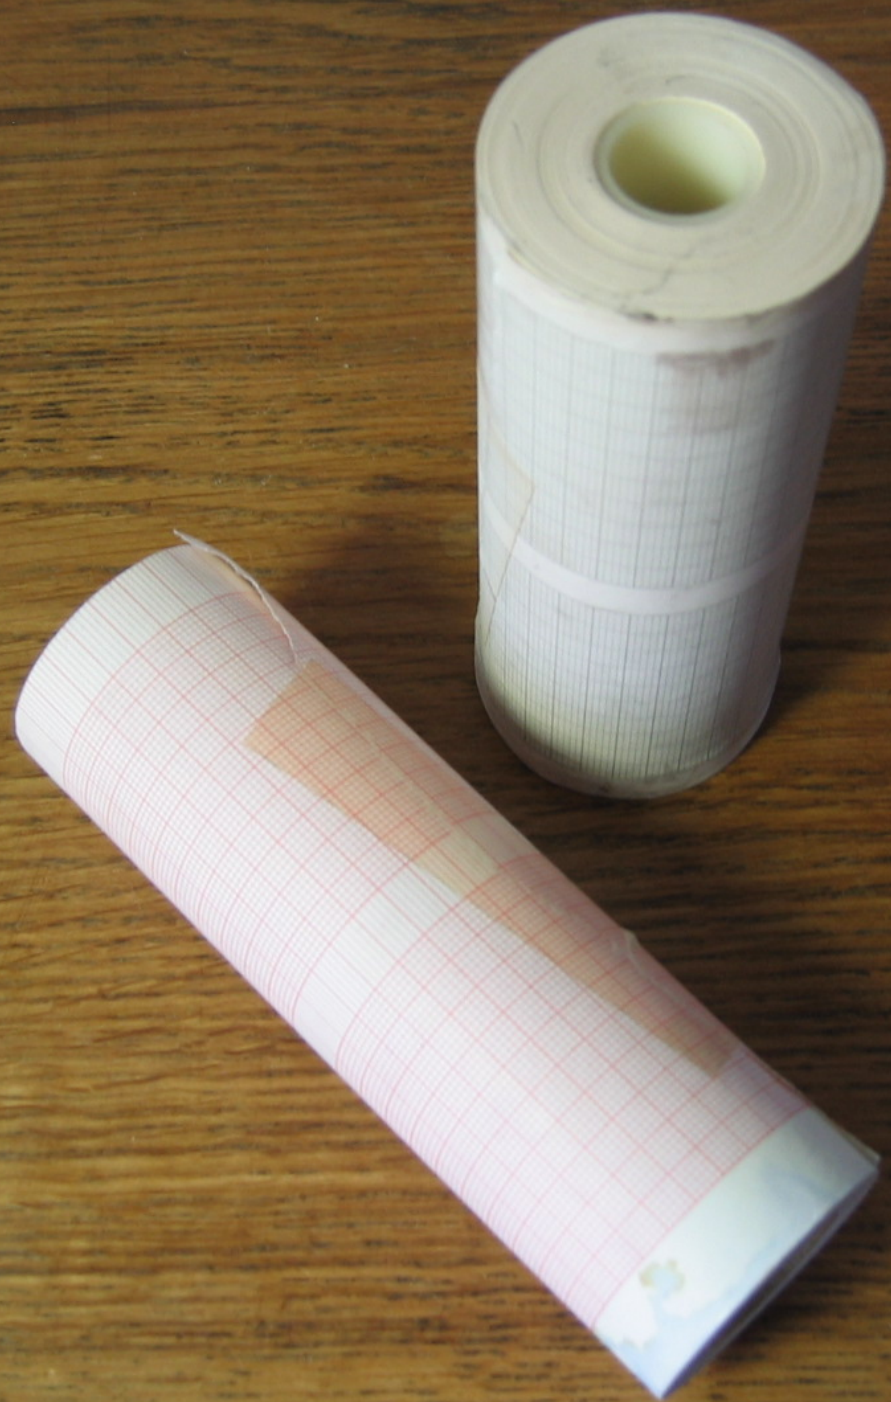

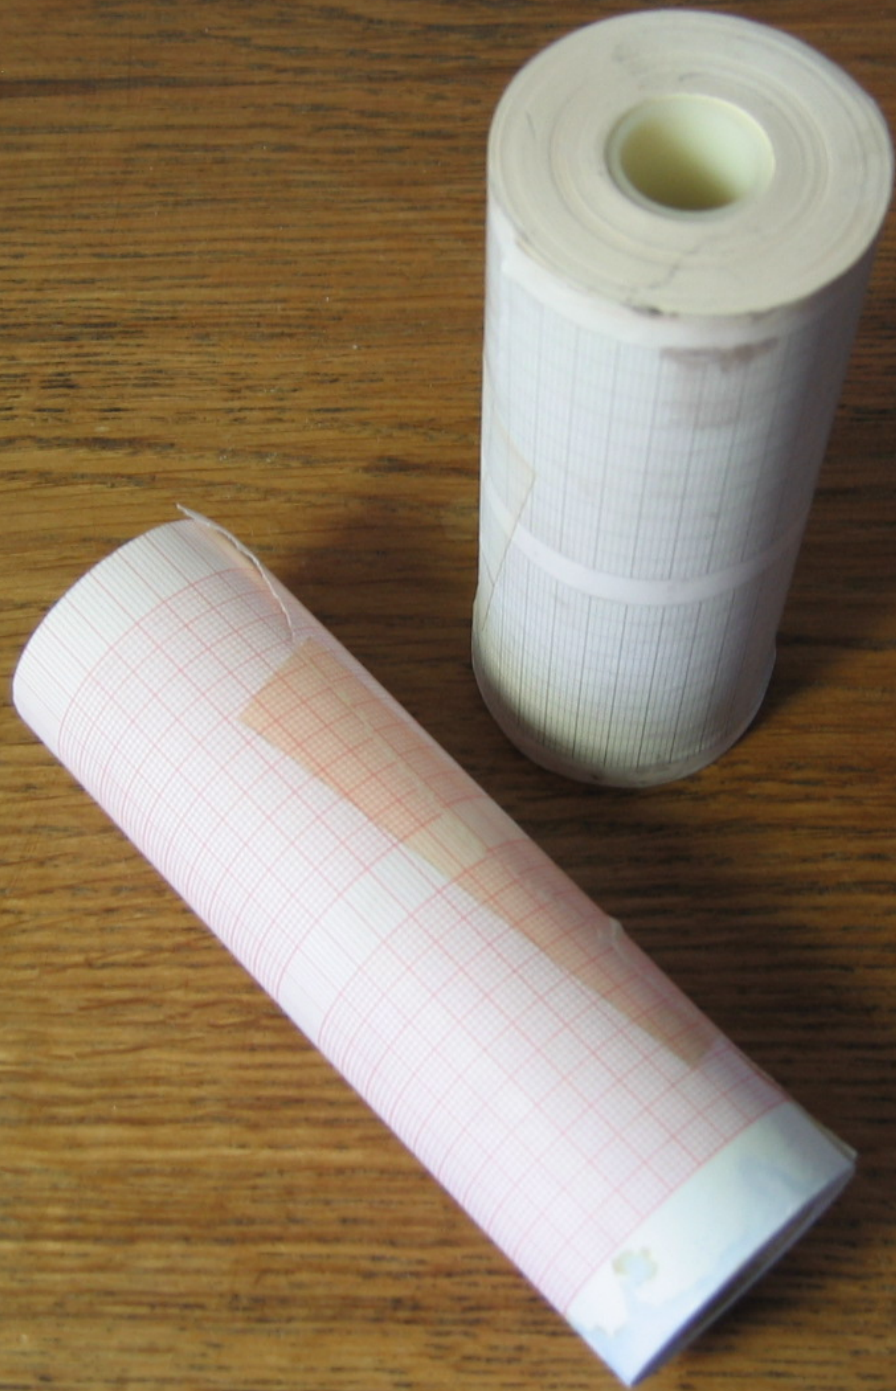


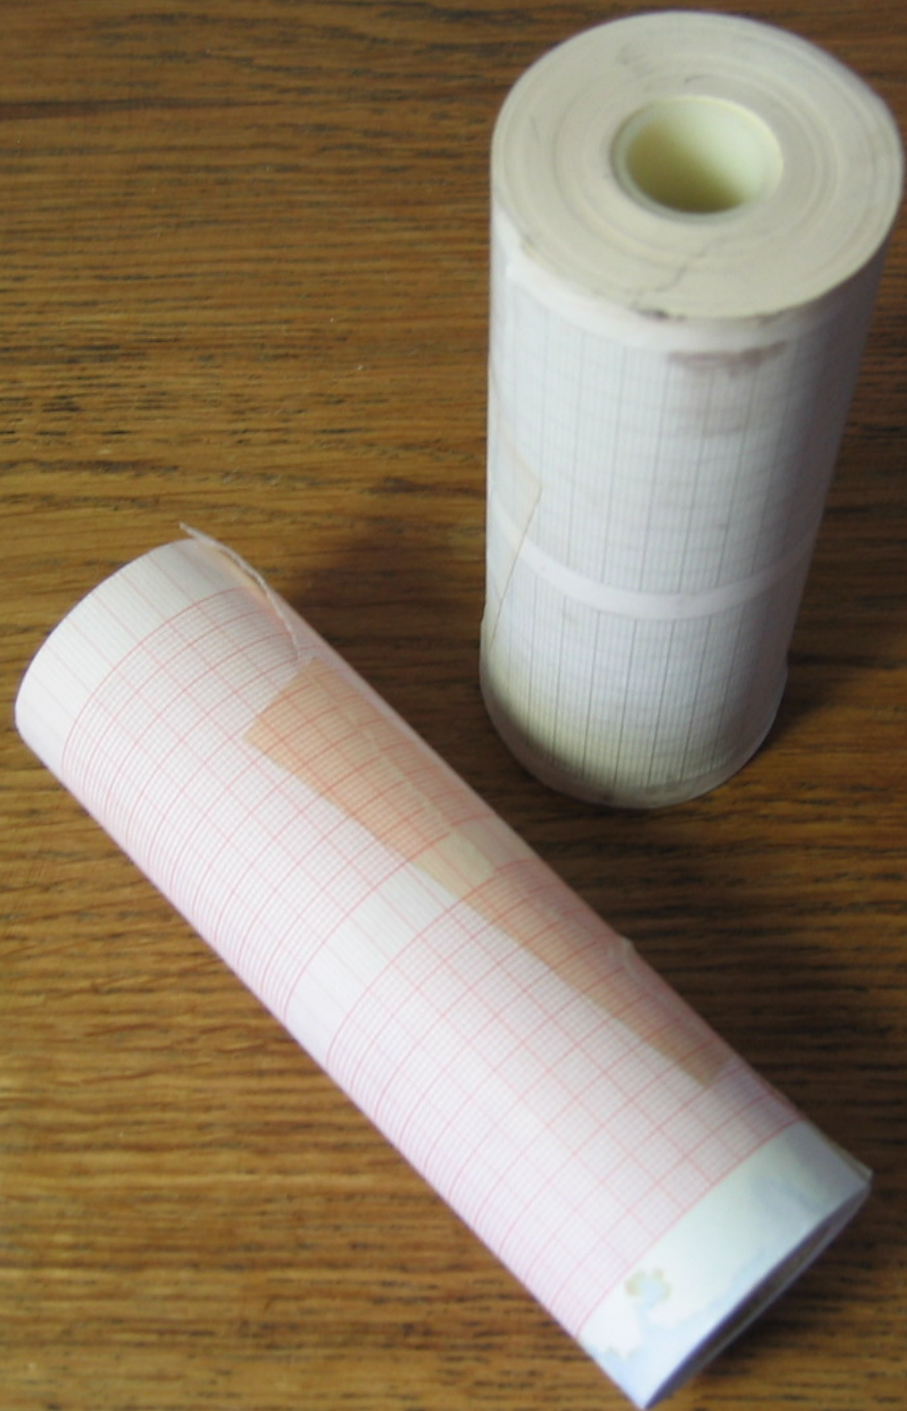

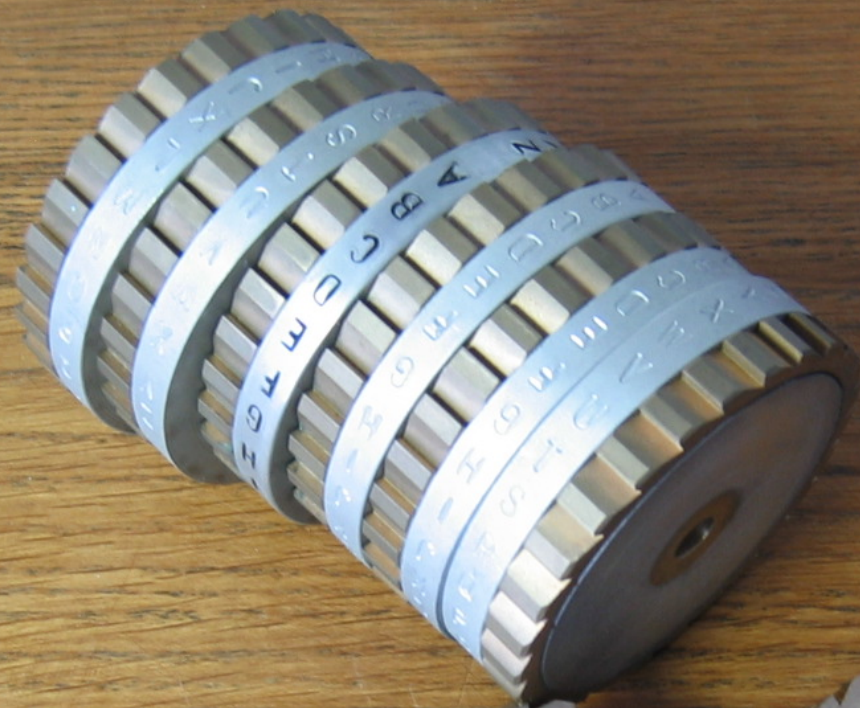

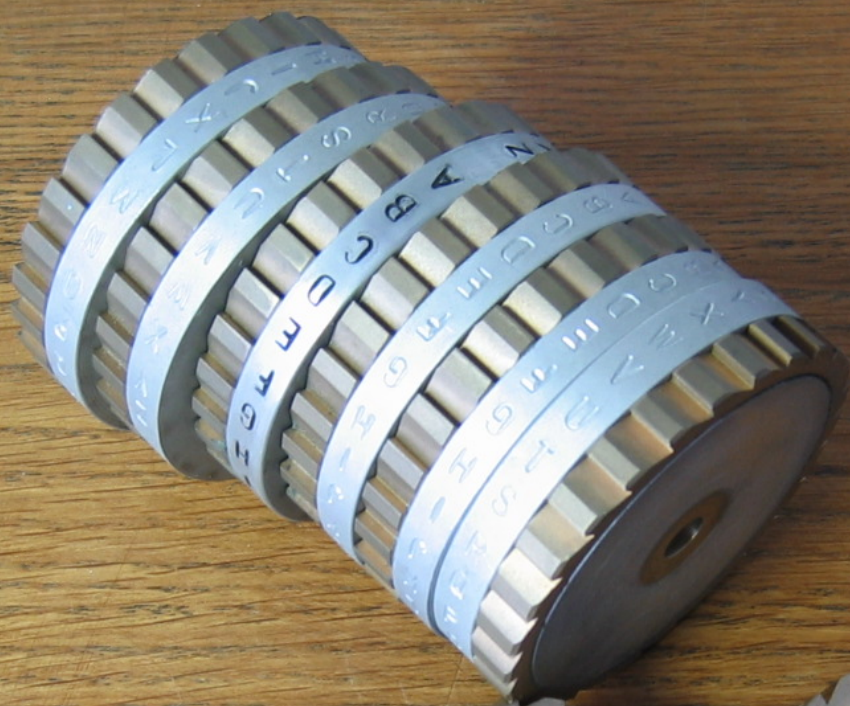



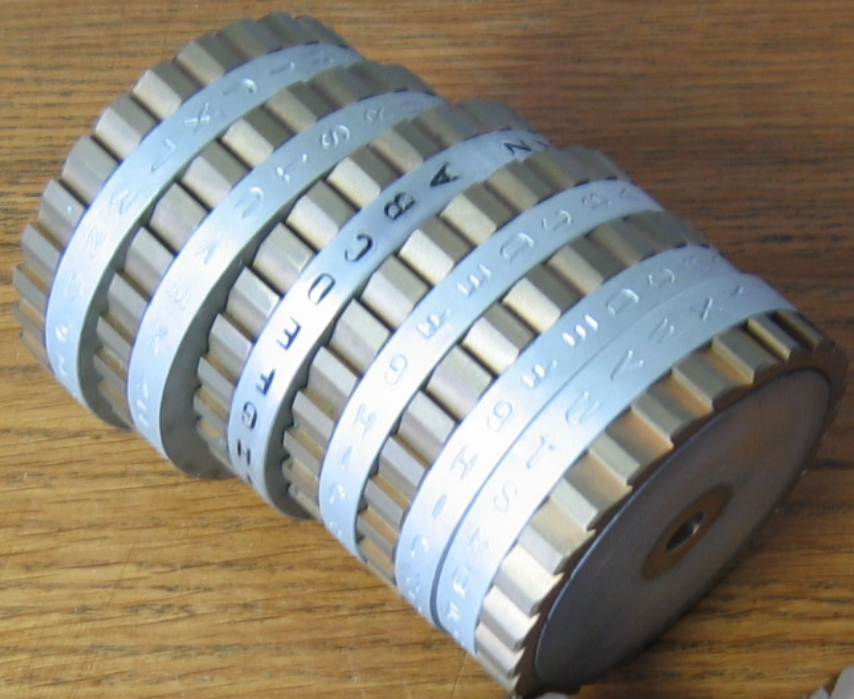




















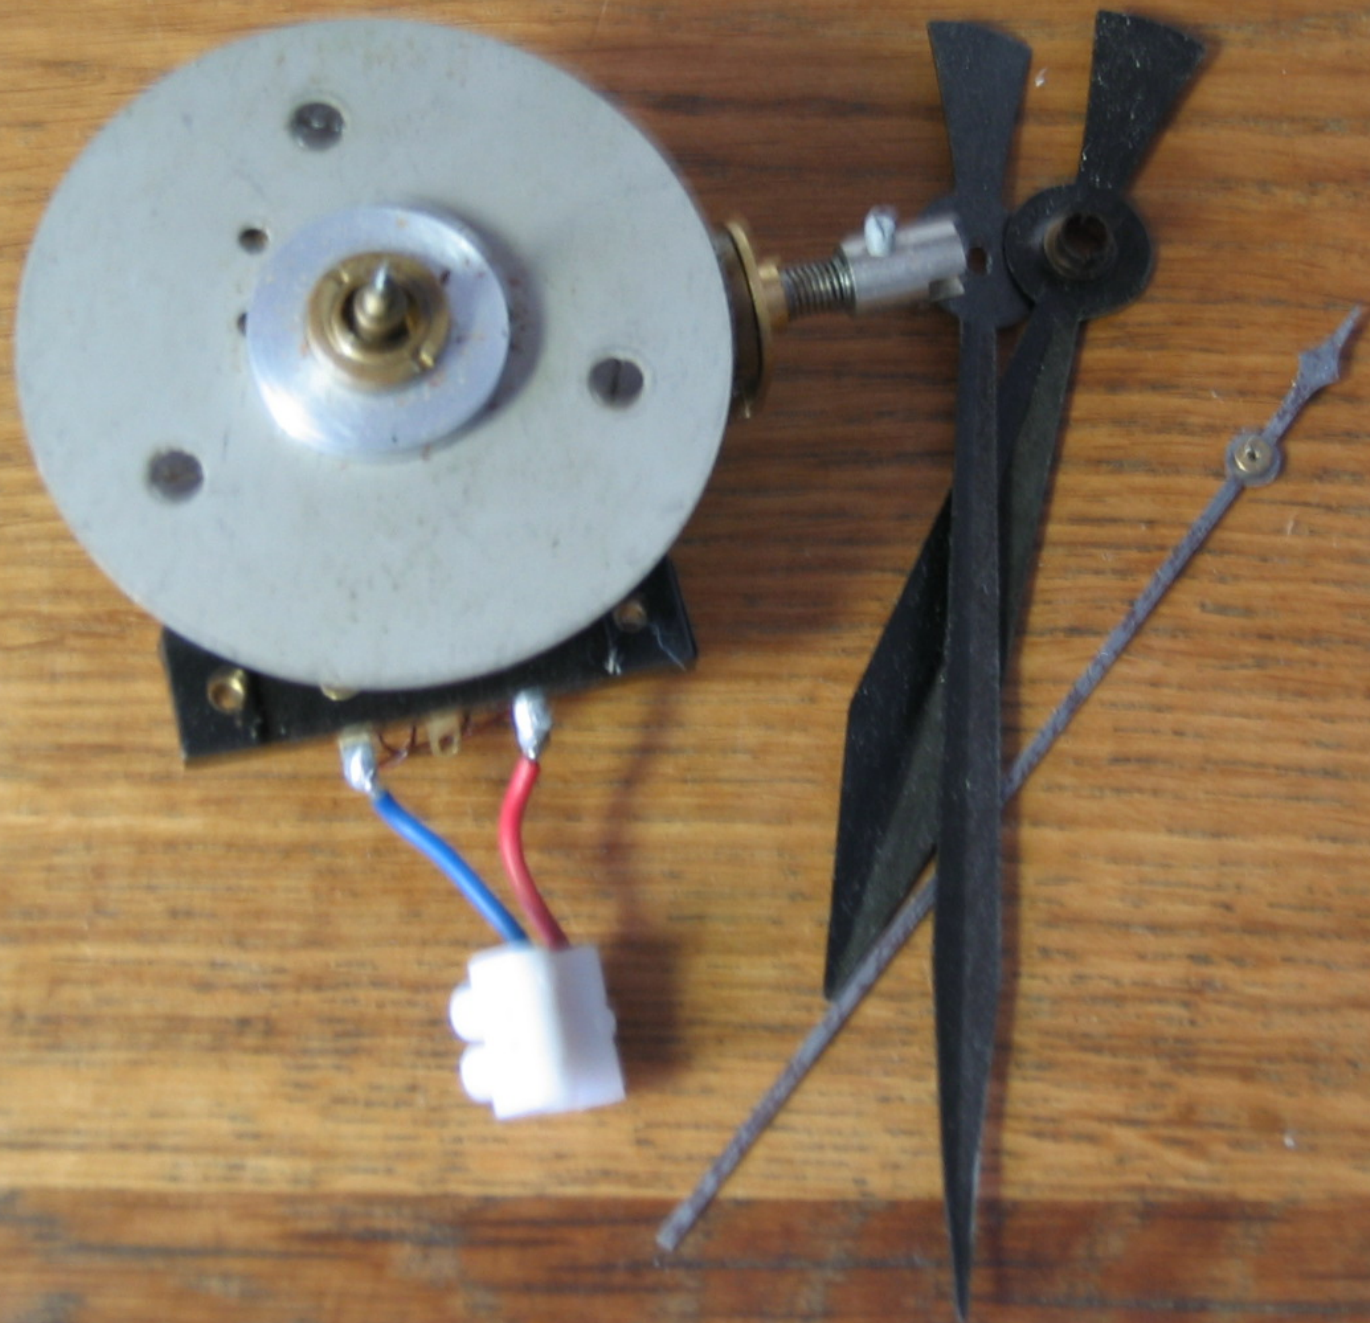


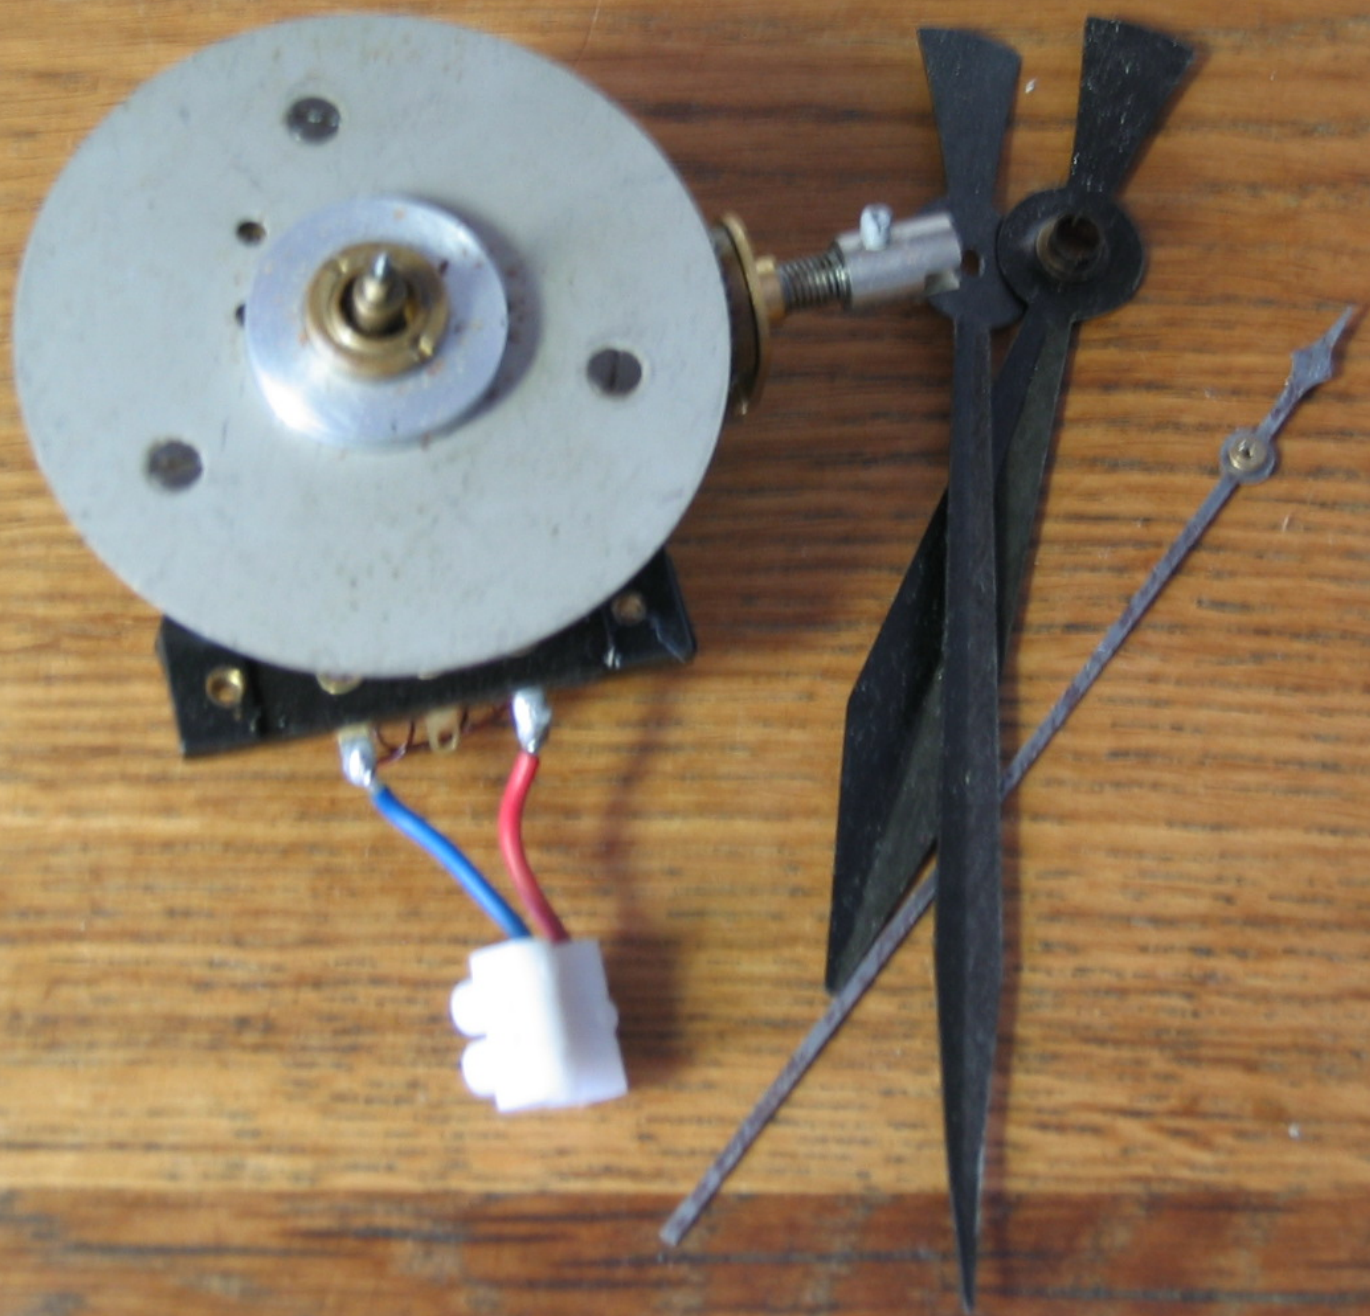


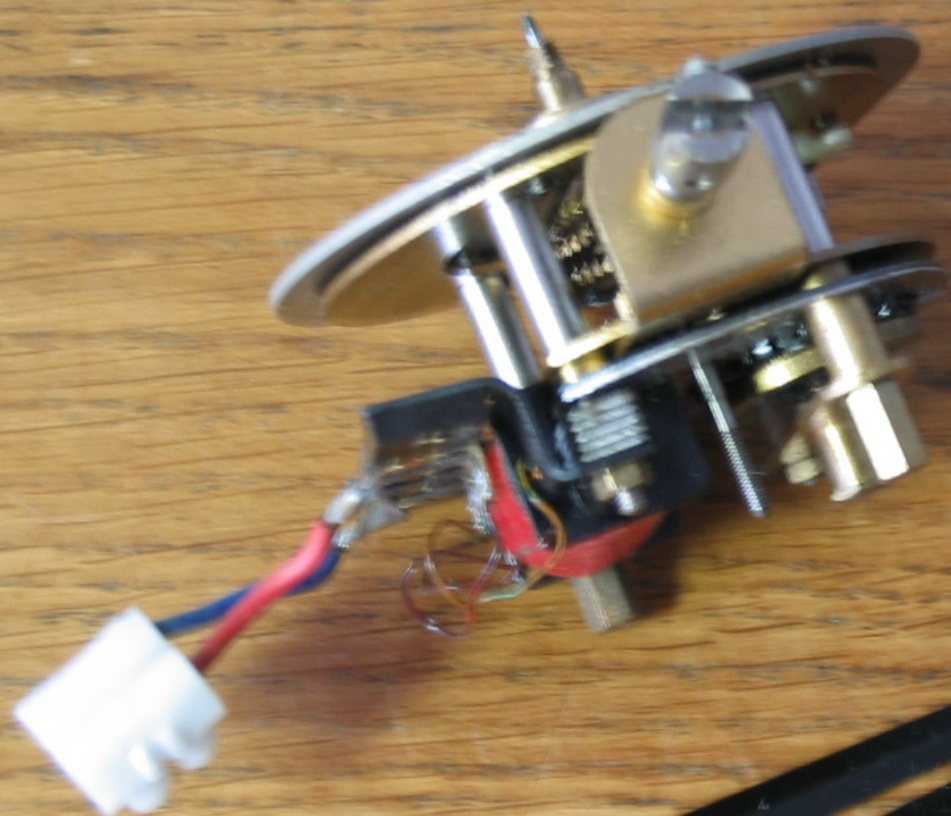


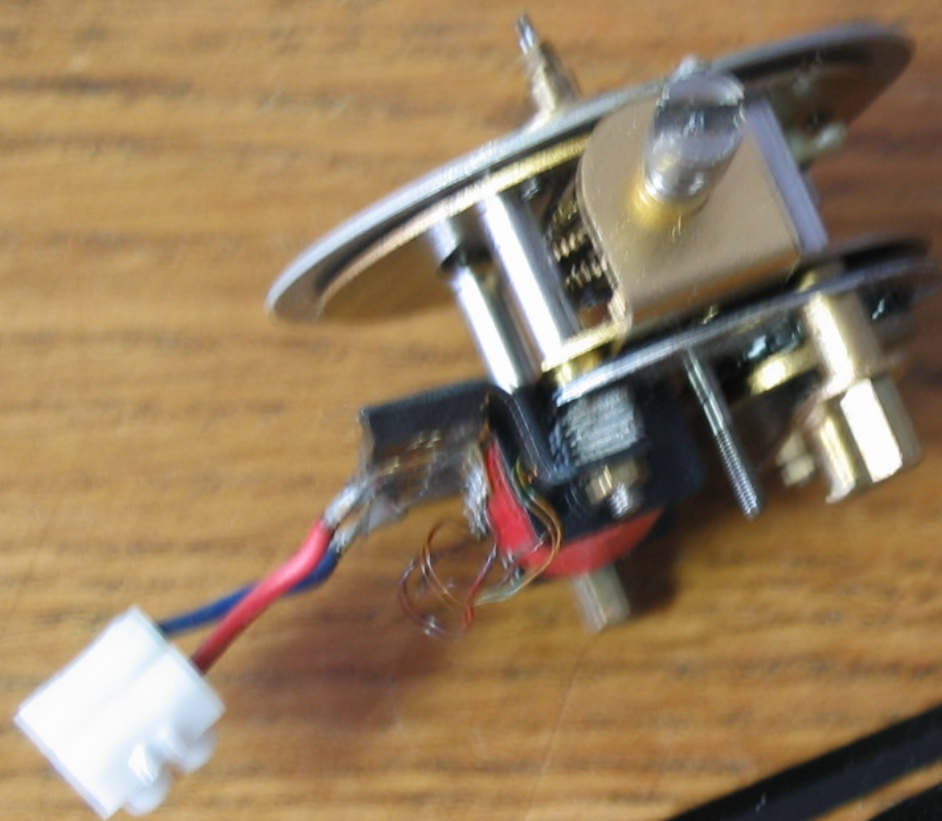


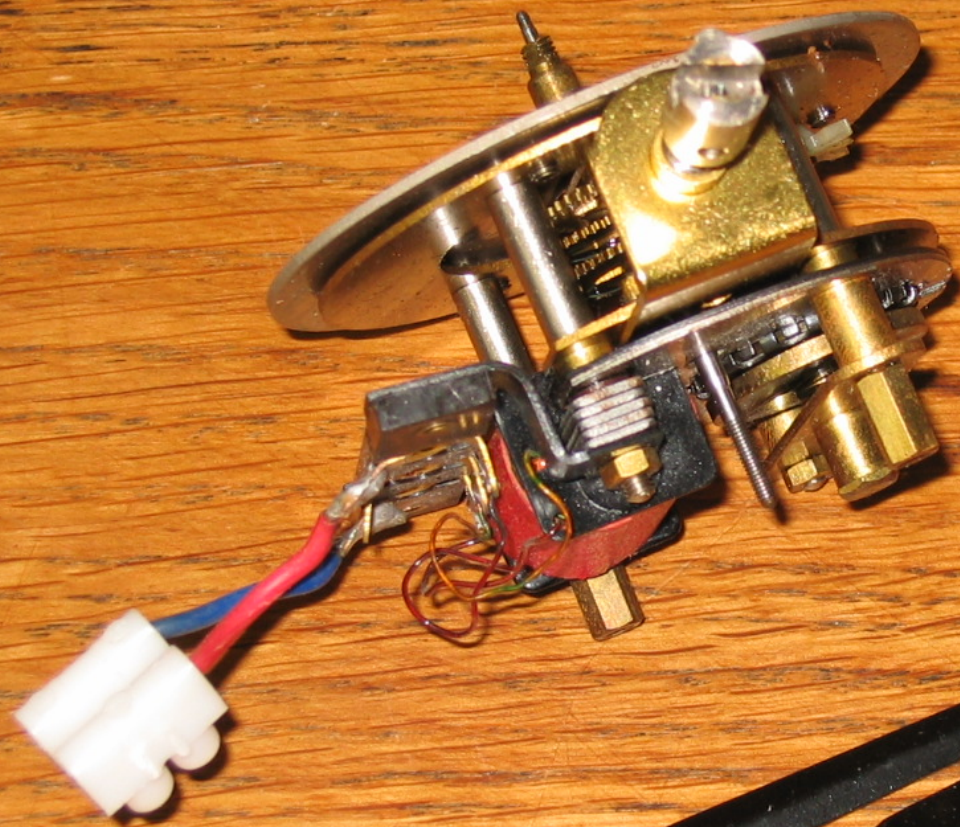


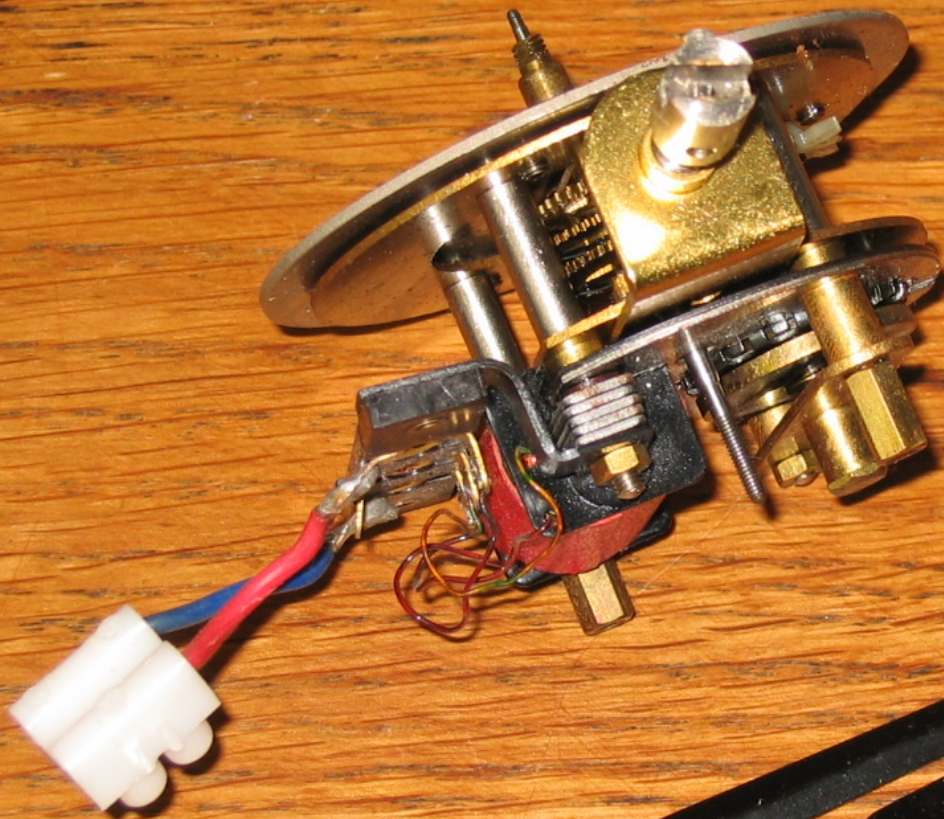


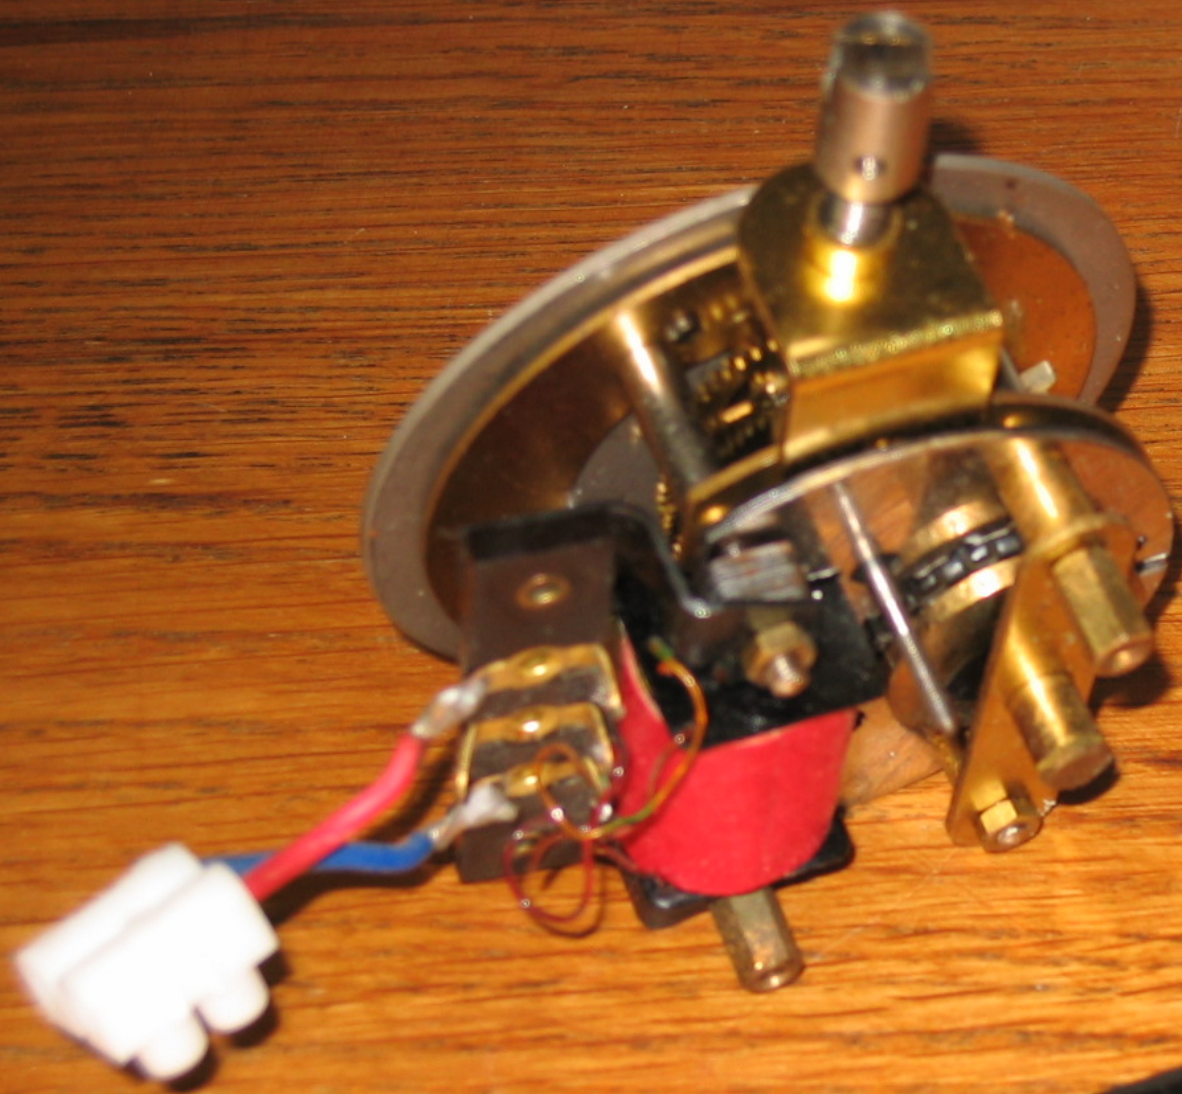


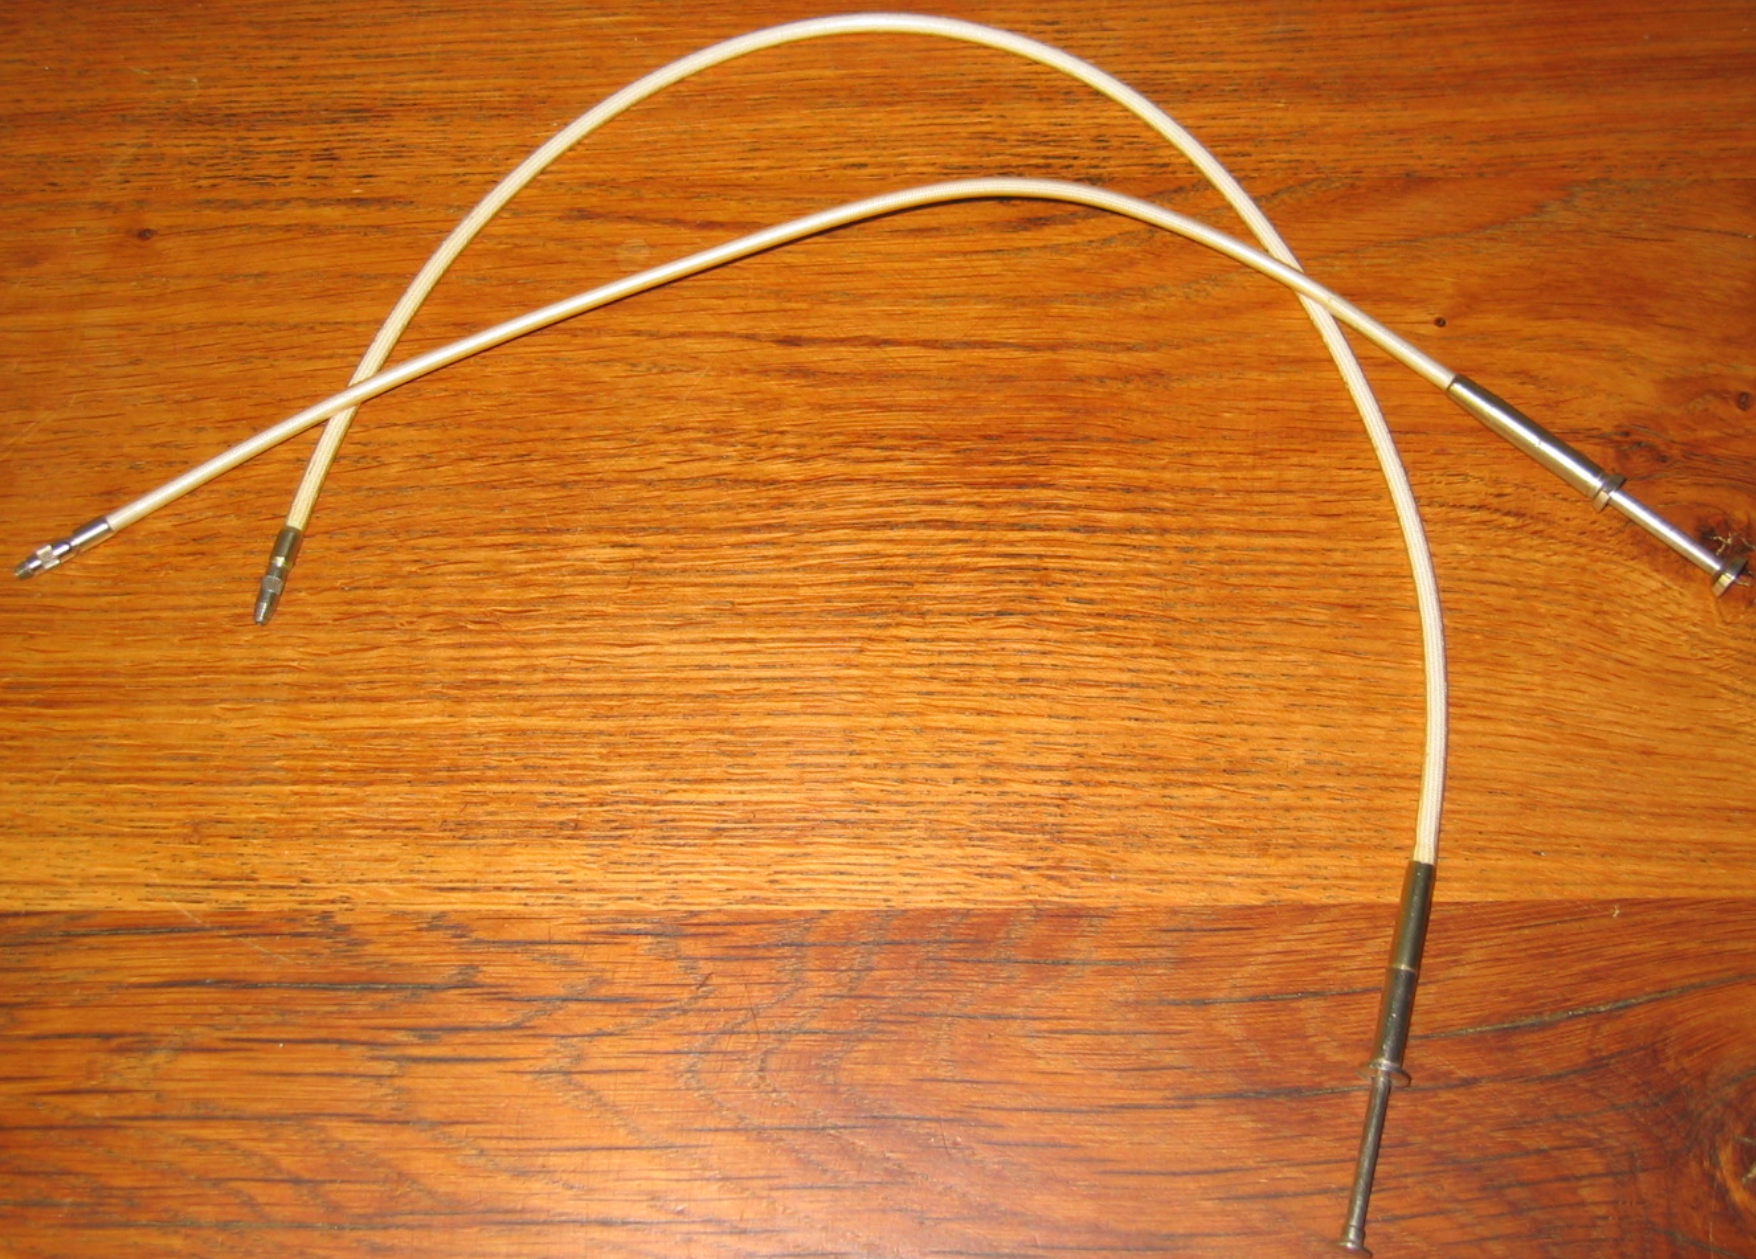

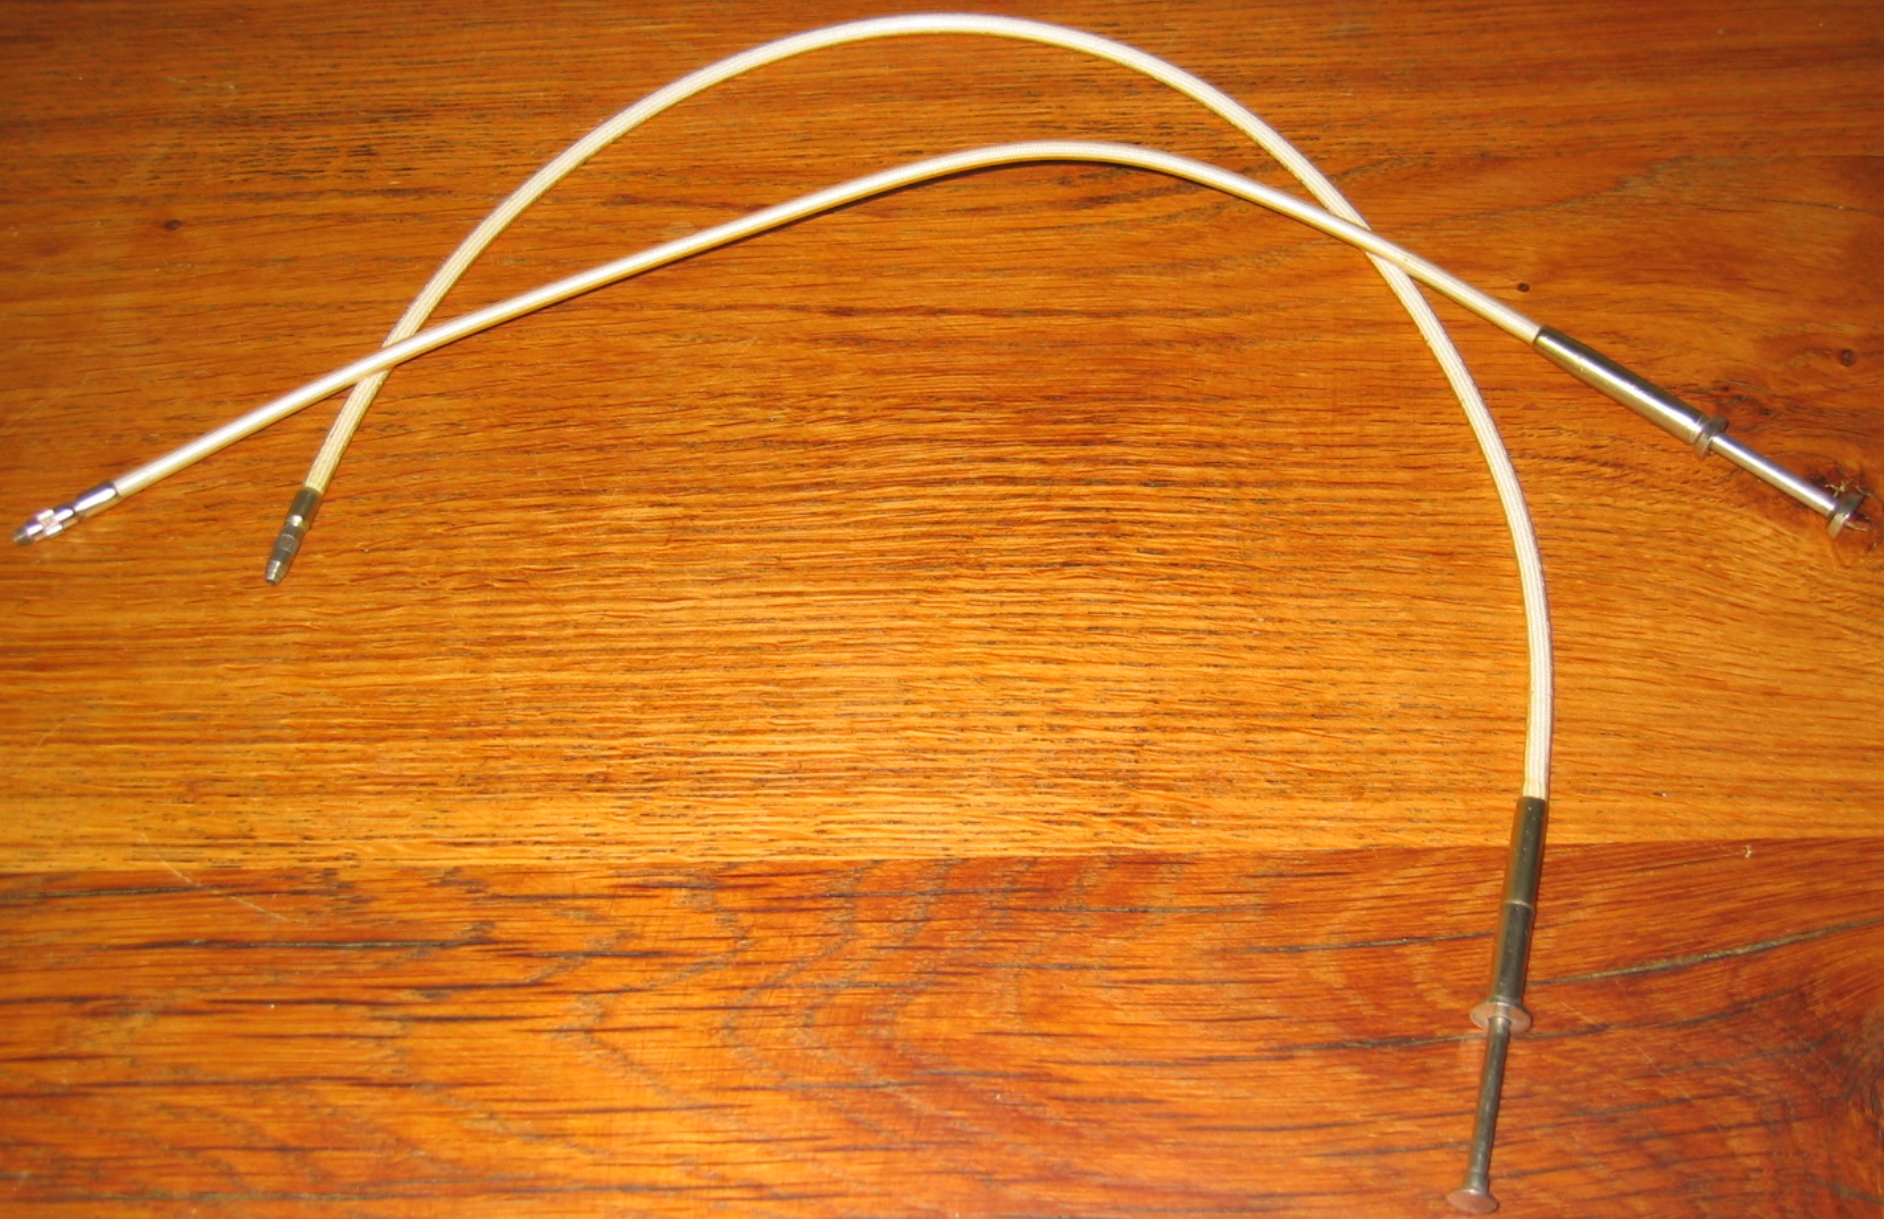

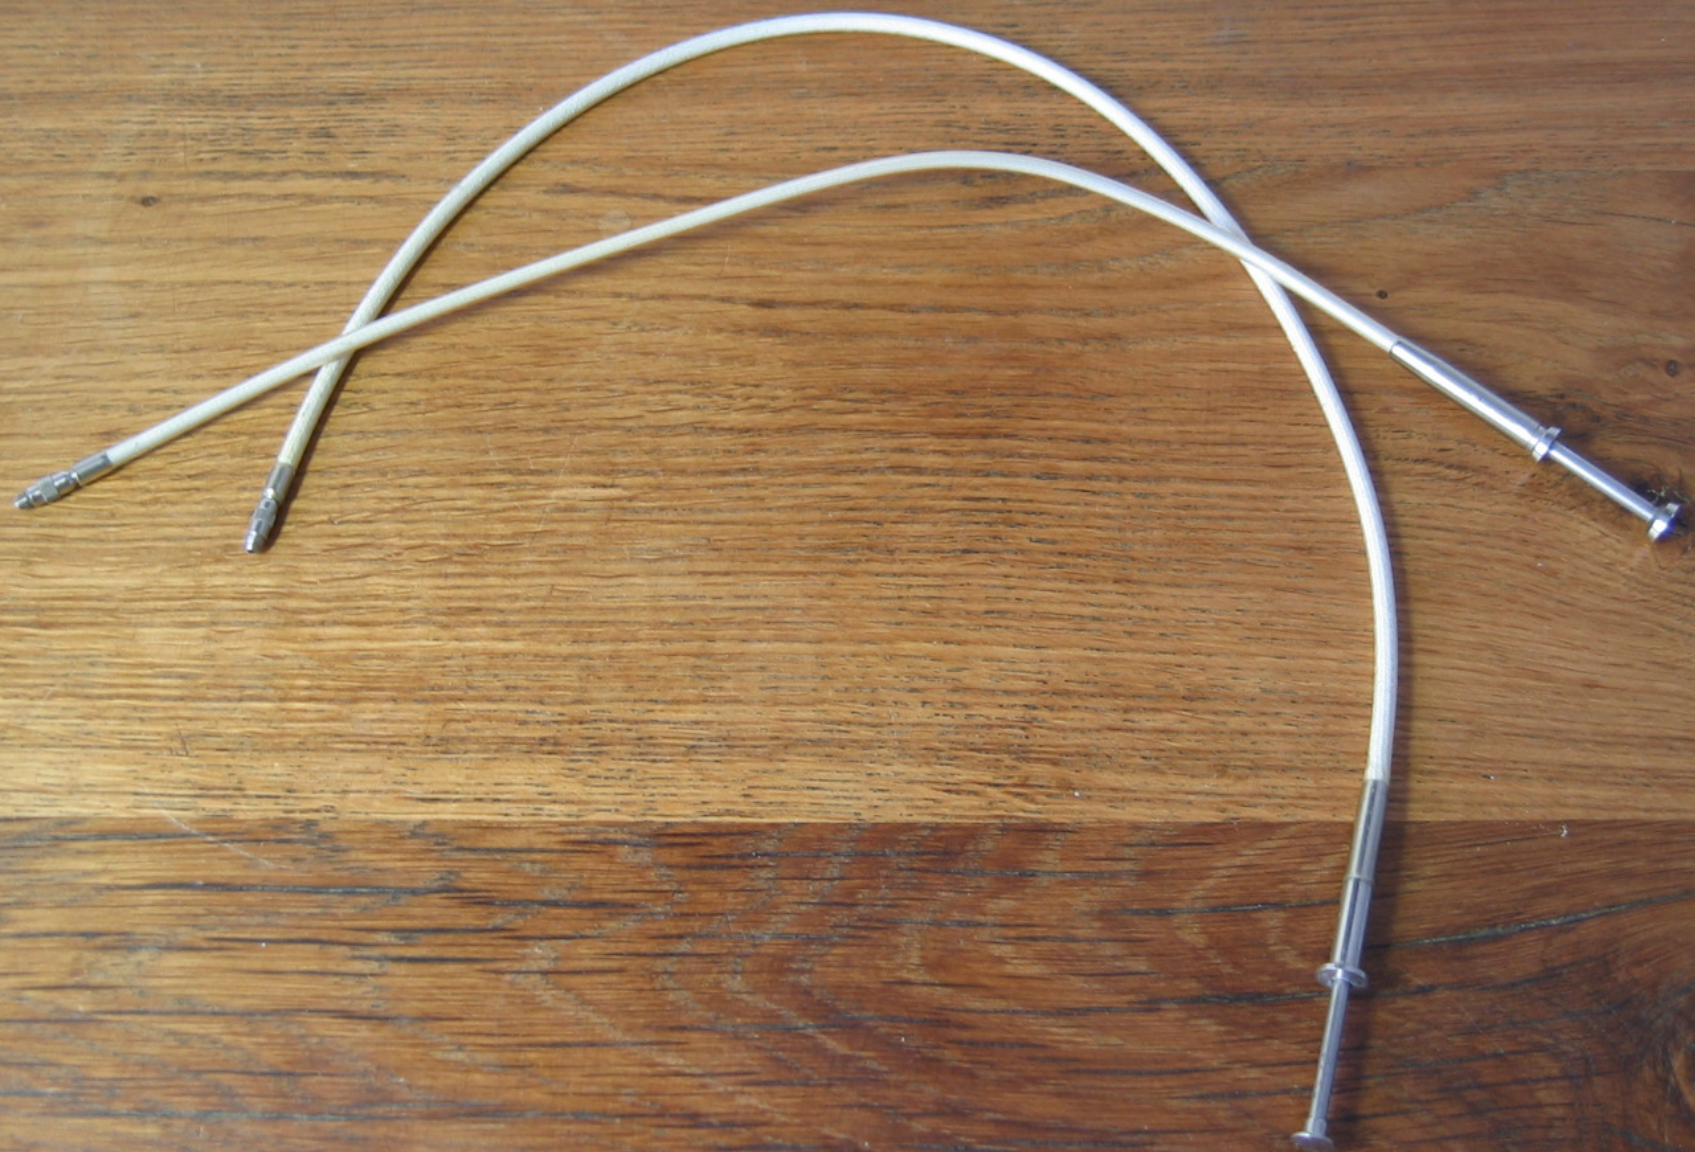

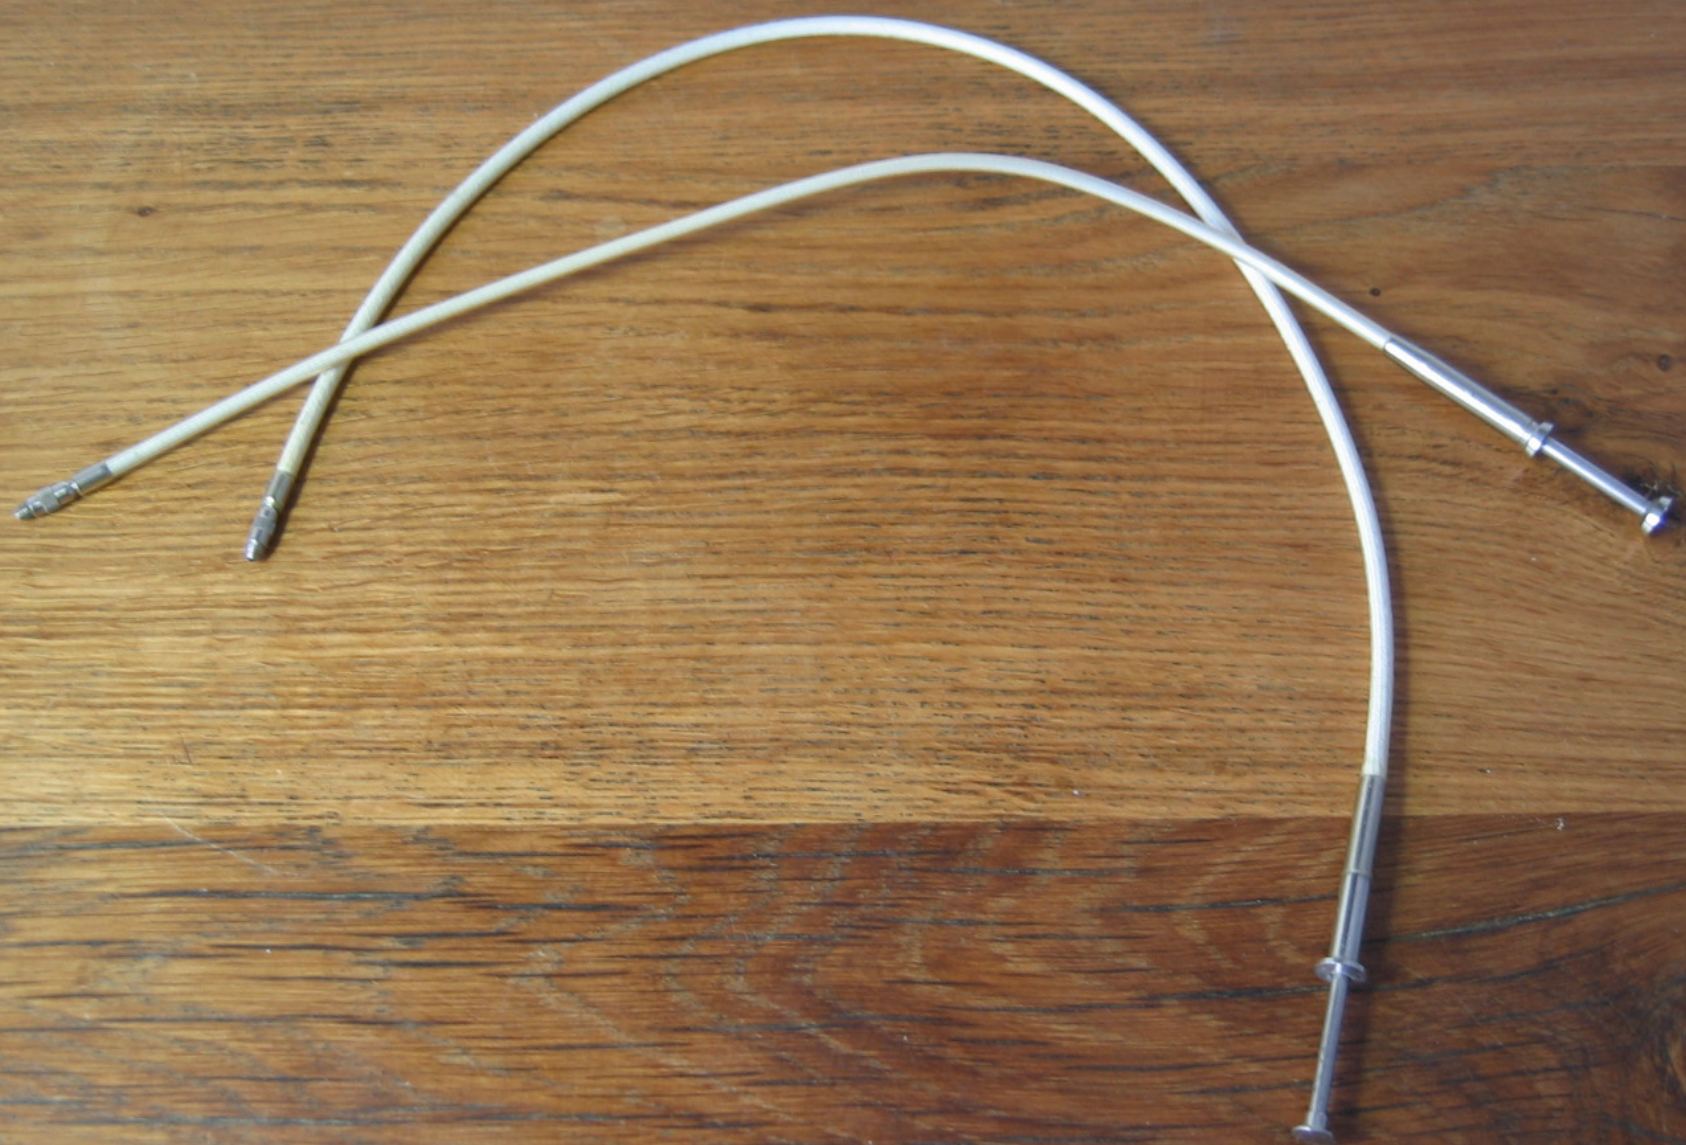

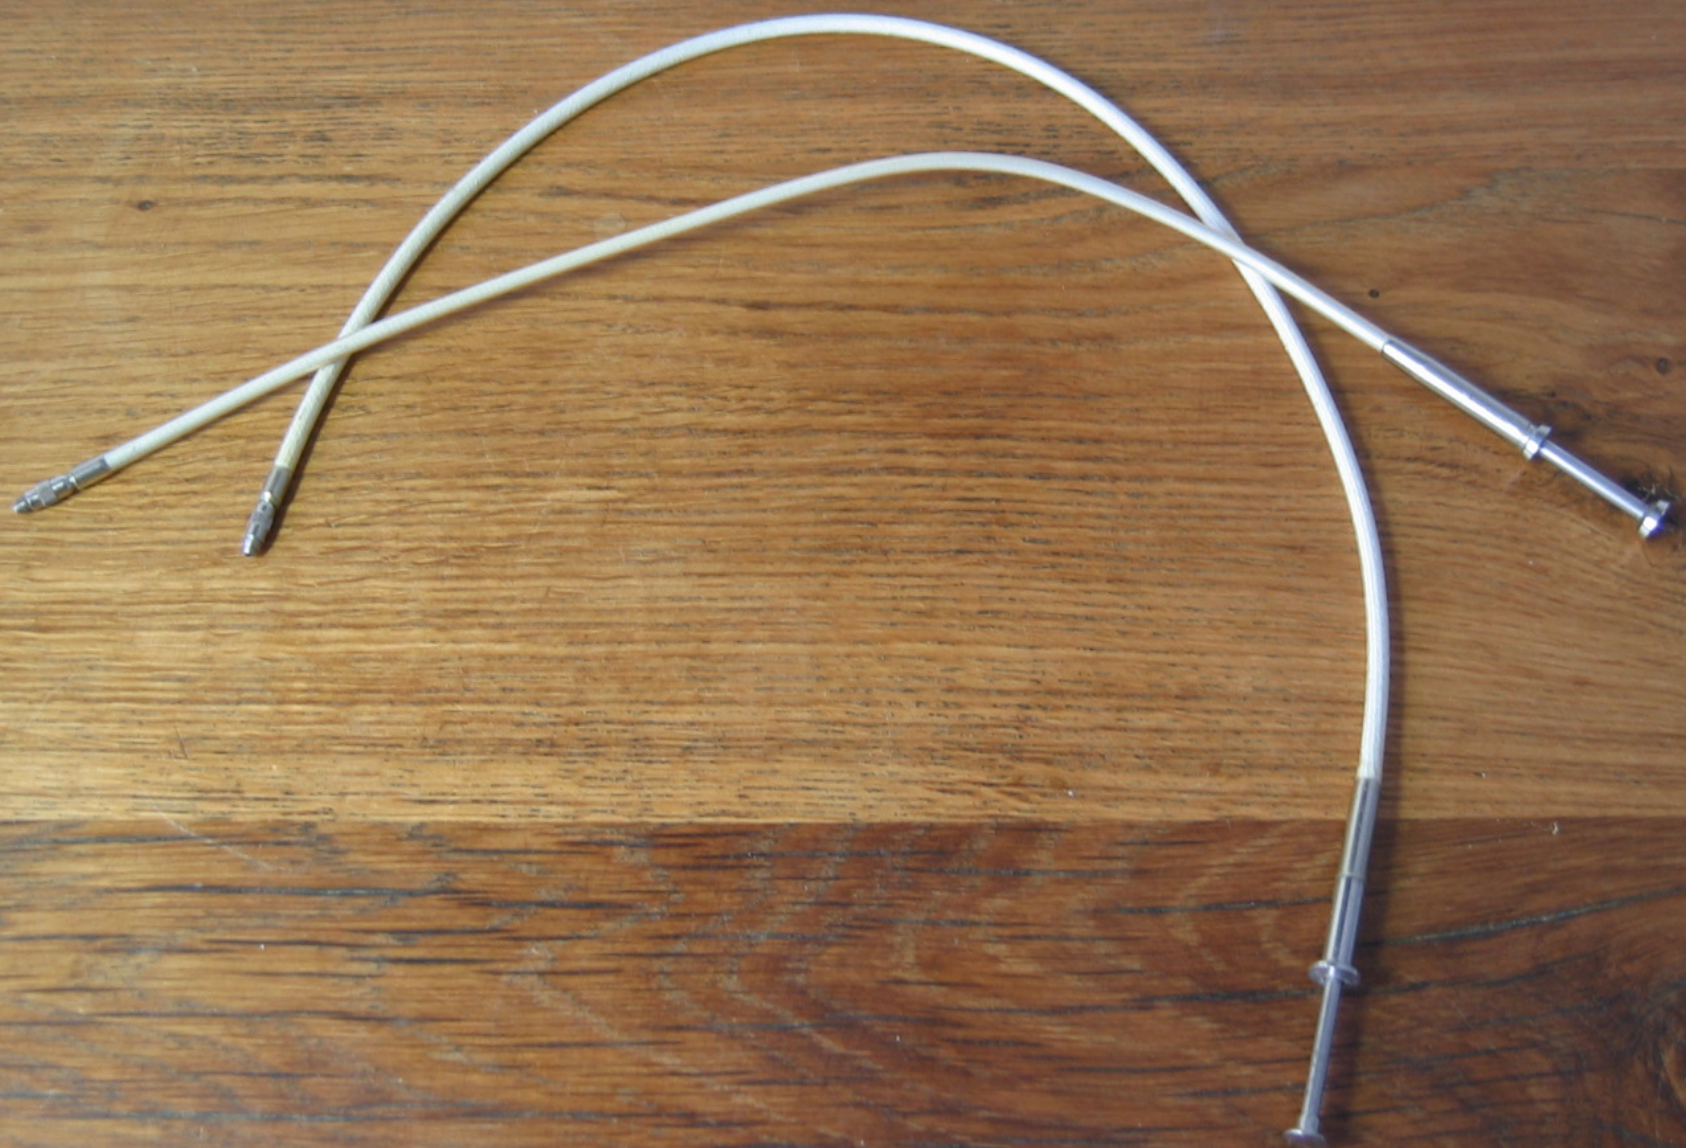









SIEMENS

Kamm
V 23154 - D 02
20 Stück

01256



01256



Kammrelais
V23154-D 0717-B 510
20 Stück





01256



Kammrelais

V 25 154 - D 0719 - B 610

20 Stück





Kammrelais

V 23 154 - D 0719 - B 610

20 Stück

SIEMENS

21A1

92101256

294130916



Kammrelais

V 23 154 - D 0719 - B 610

20 Stück

2/A1

MADE IN GERMANY

56




Kammrelais

V 23 154 - D 0719 - B 610

20 Stück

2/A1

MADE IN GERMANY

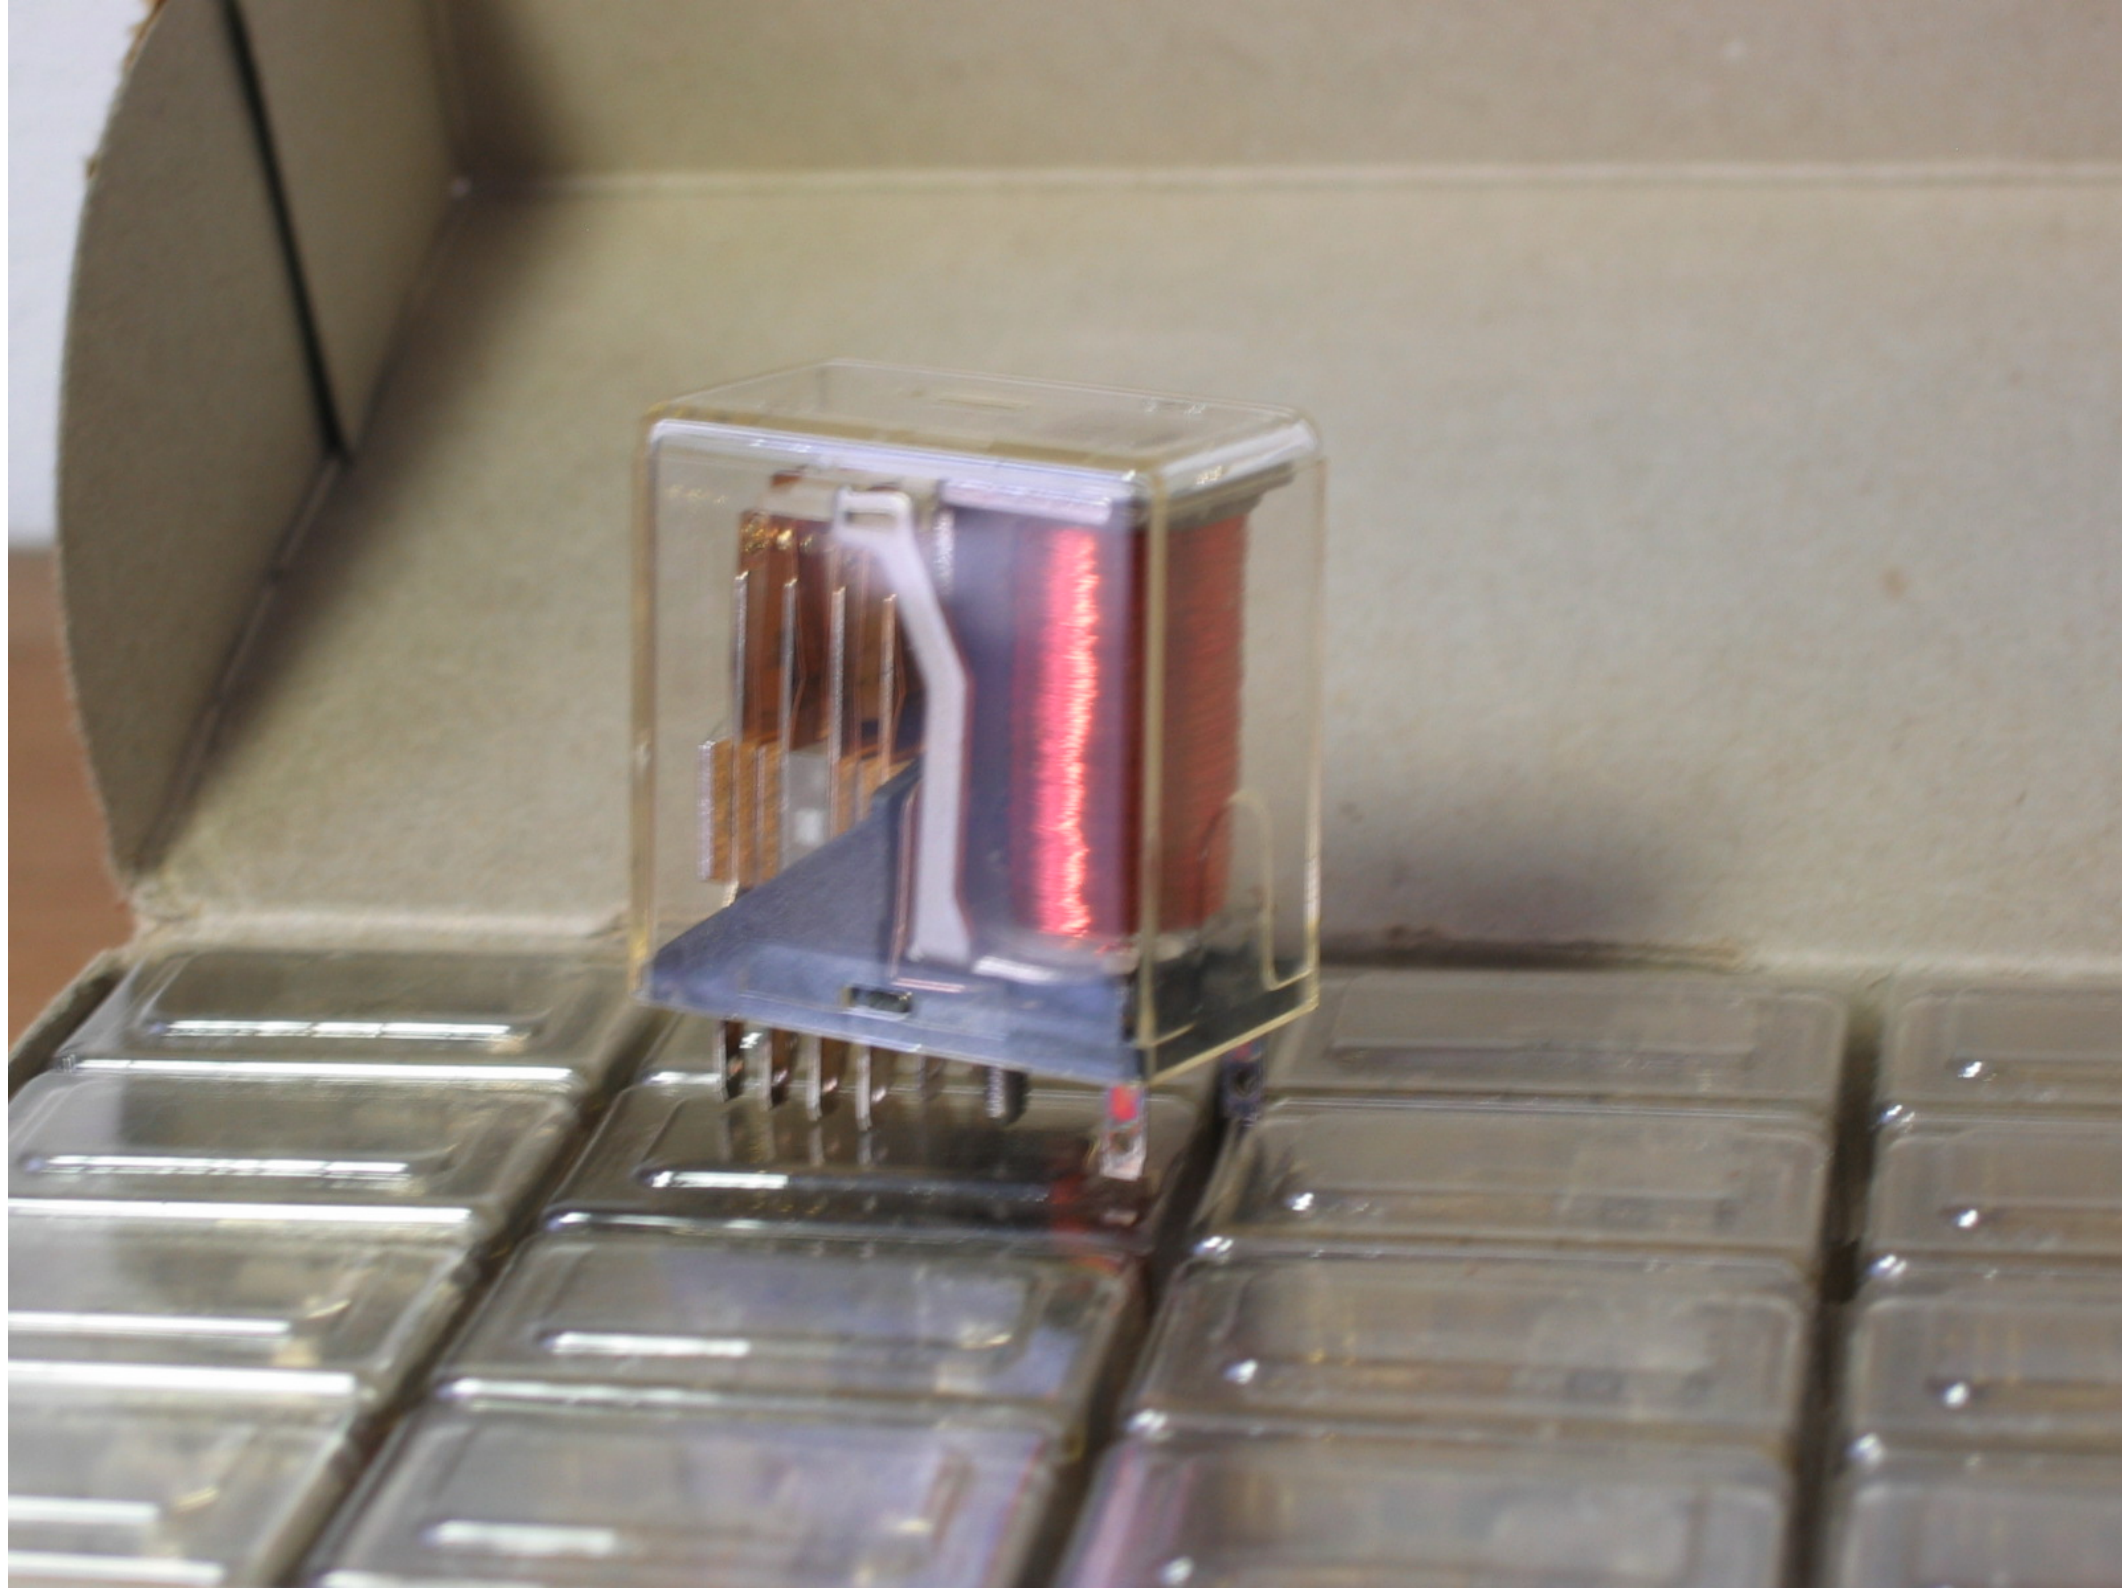

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610

V2315A-
00719-8610



Kammrelais

V 23 154 - D 0719 - B 610

20 Stück



56

SIEMENS

Kammrelais

V 23 154 - D 0719 - B 610

20 Stück







56
SIEMENS
Kammrelais
V33154 - D 0717 - B 510
20 Stück



7505550
5555


CONNECTOREN
TOEGEBORVEN & KOELELEMENTEN
PRINTPLAATMATERIALEN
BEHUIZINGEN
DI-GEAR
BATTERIJEN & ACCU'S
ELEKTRONICA BOUWSETEN
MEET- & TESTAPPARATUUR
PC & AUDIO/VIDEO-AANSLUITMATERIALEN
MICROFOONS & SPEAKERS
ENZ.

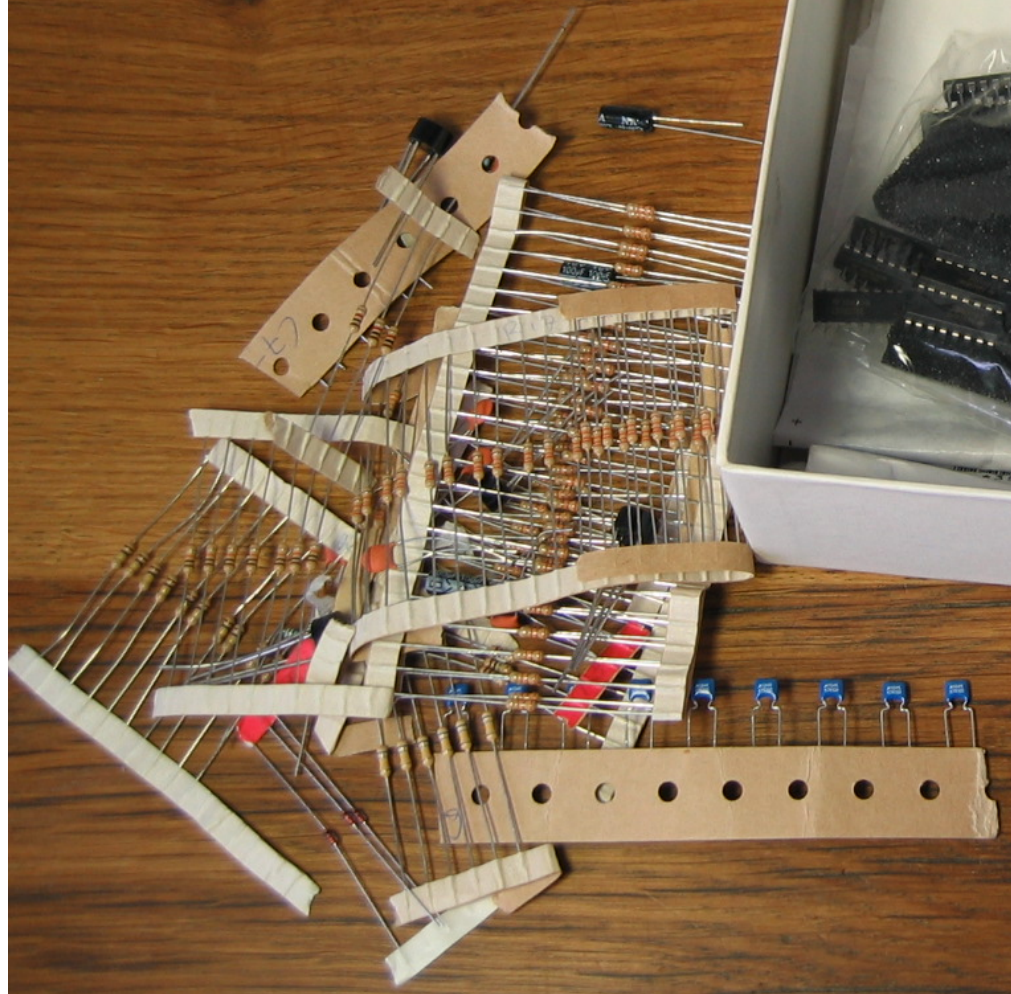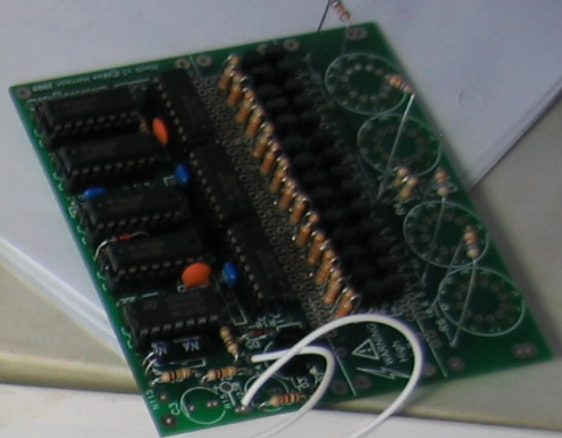

VISITEKAARTEN



ENVELOPPEN

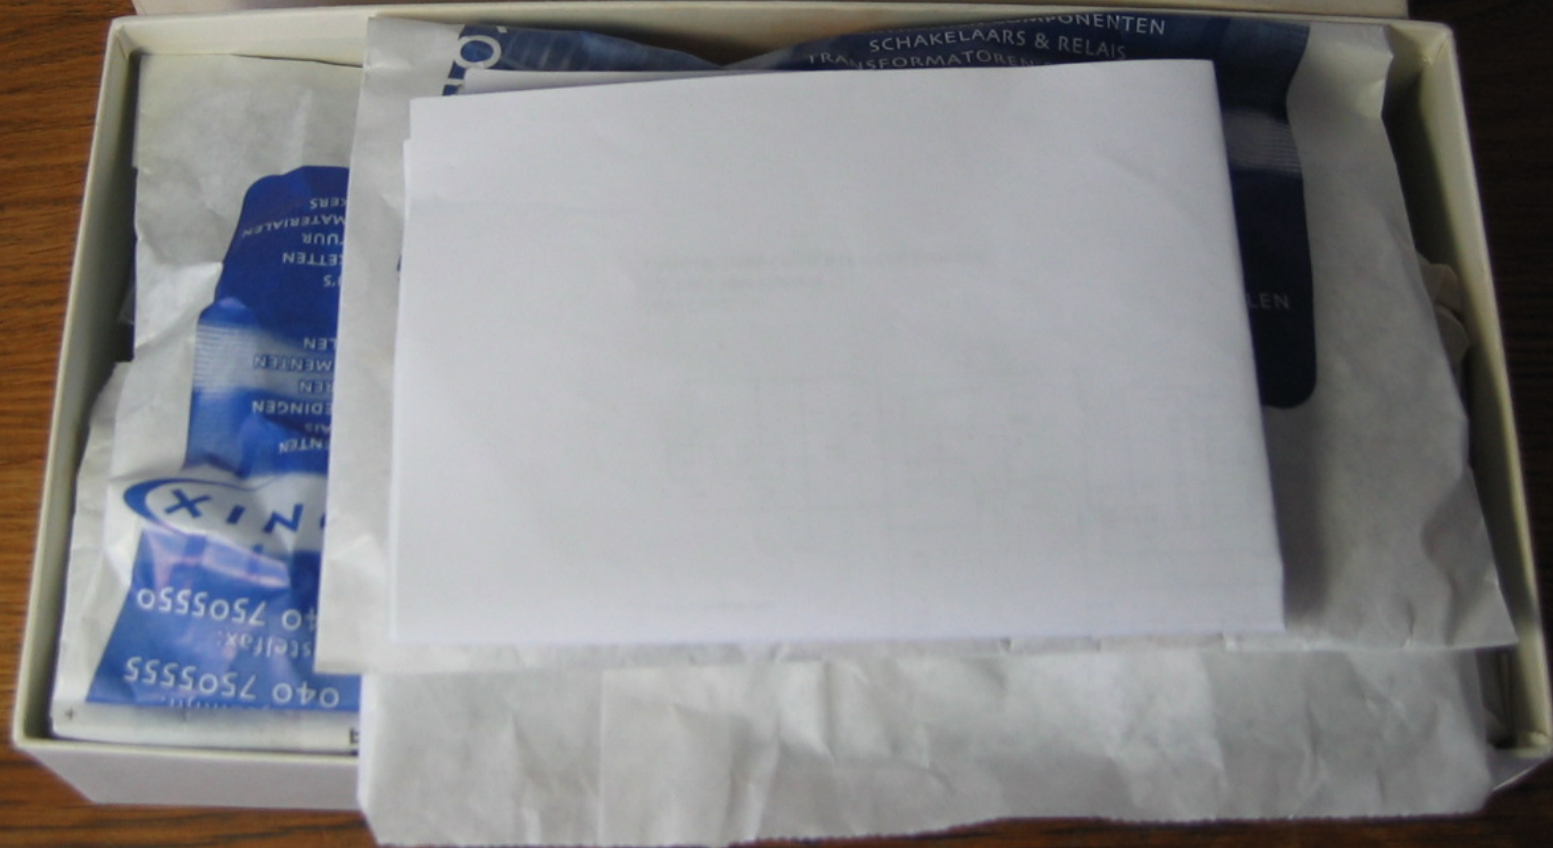

















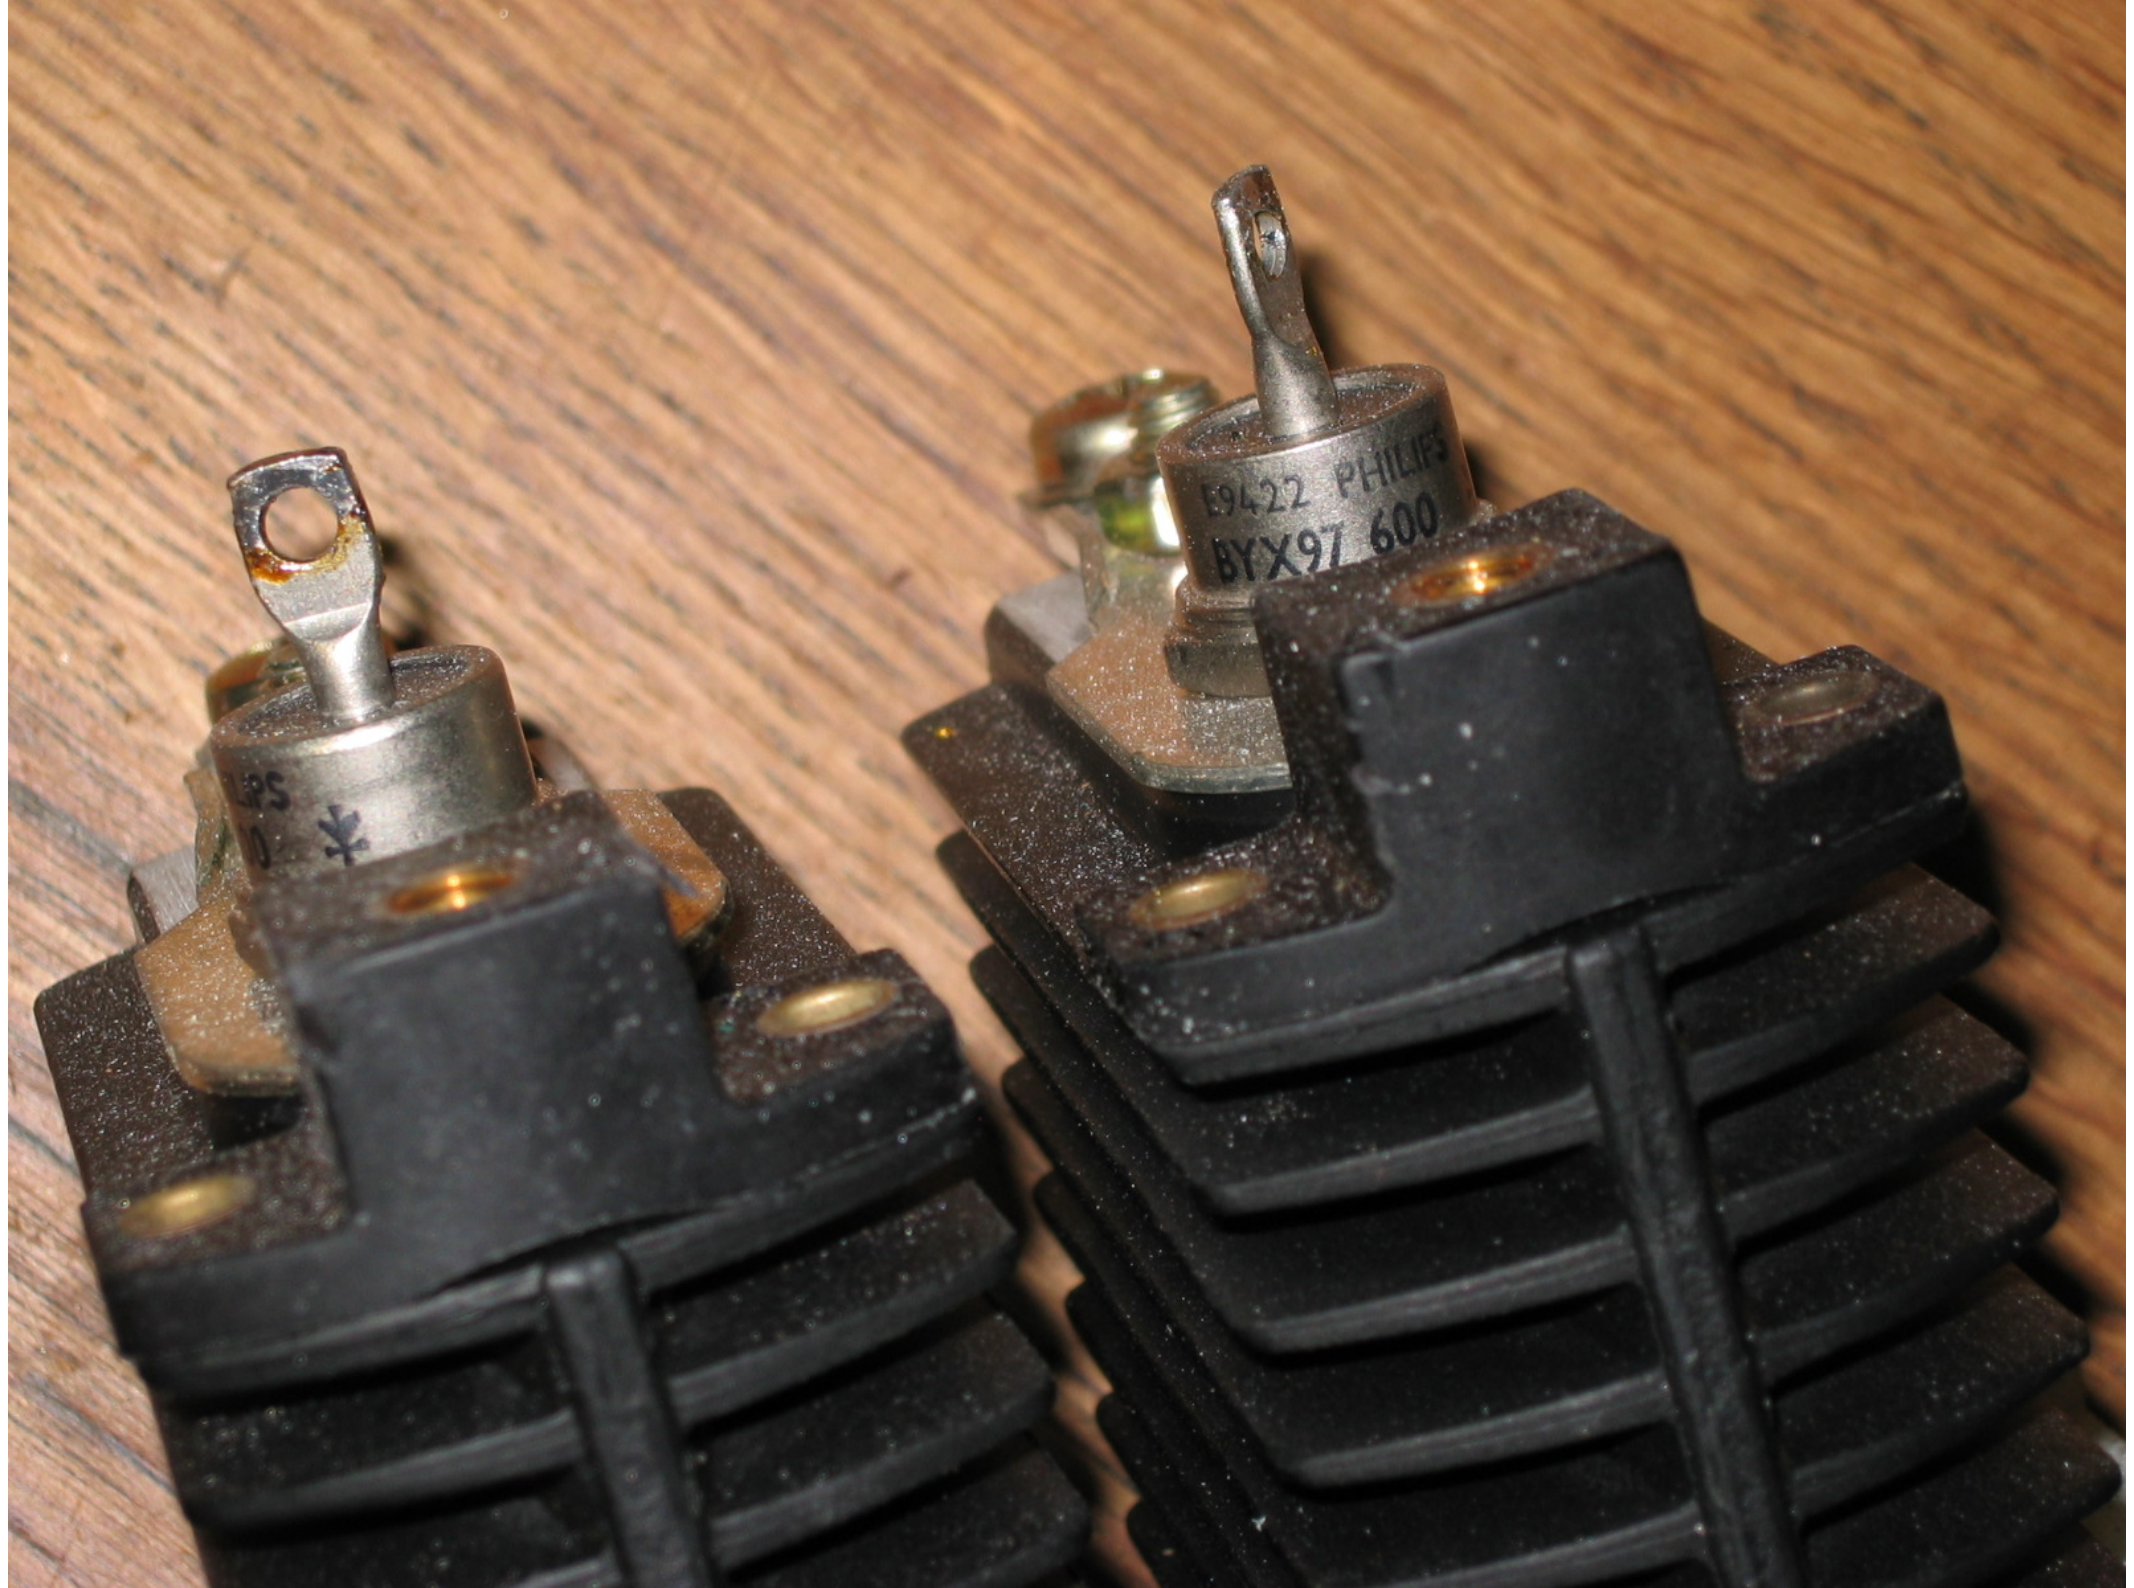

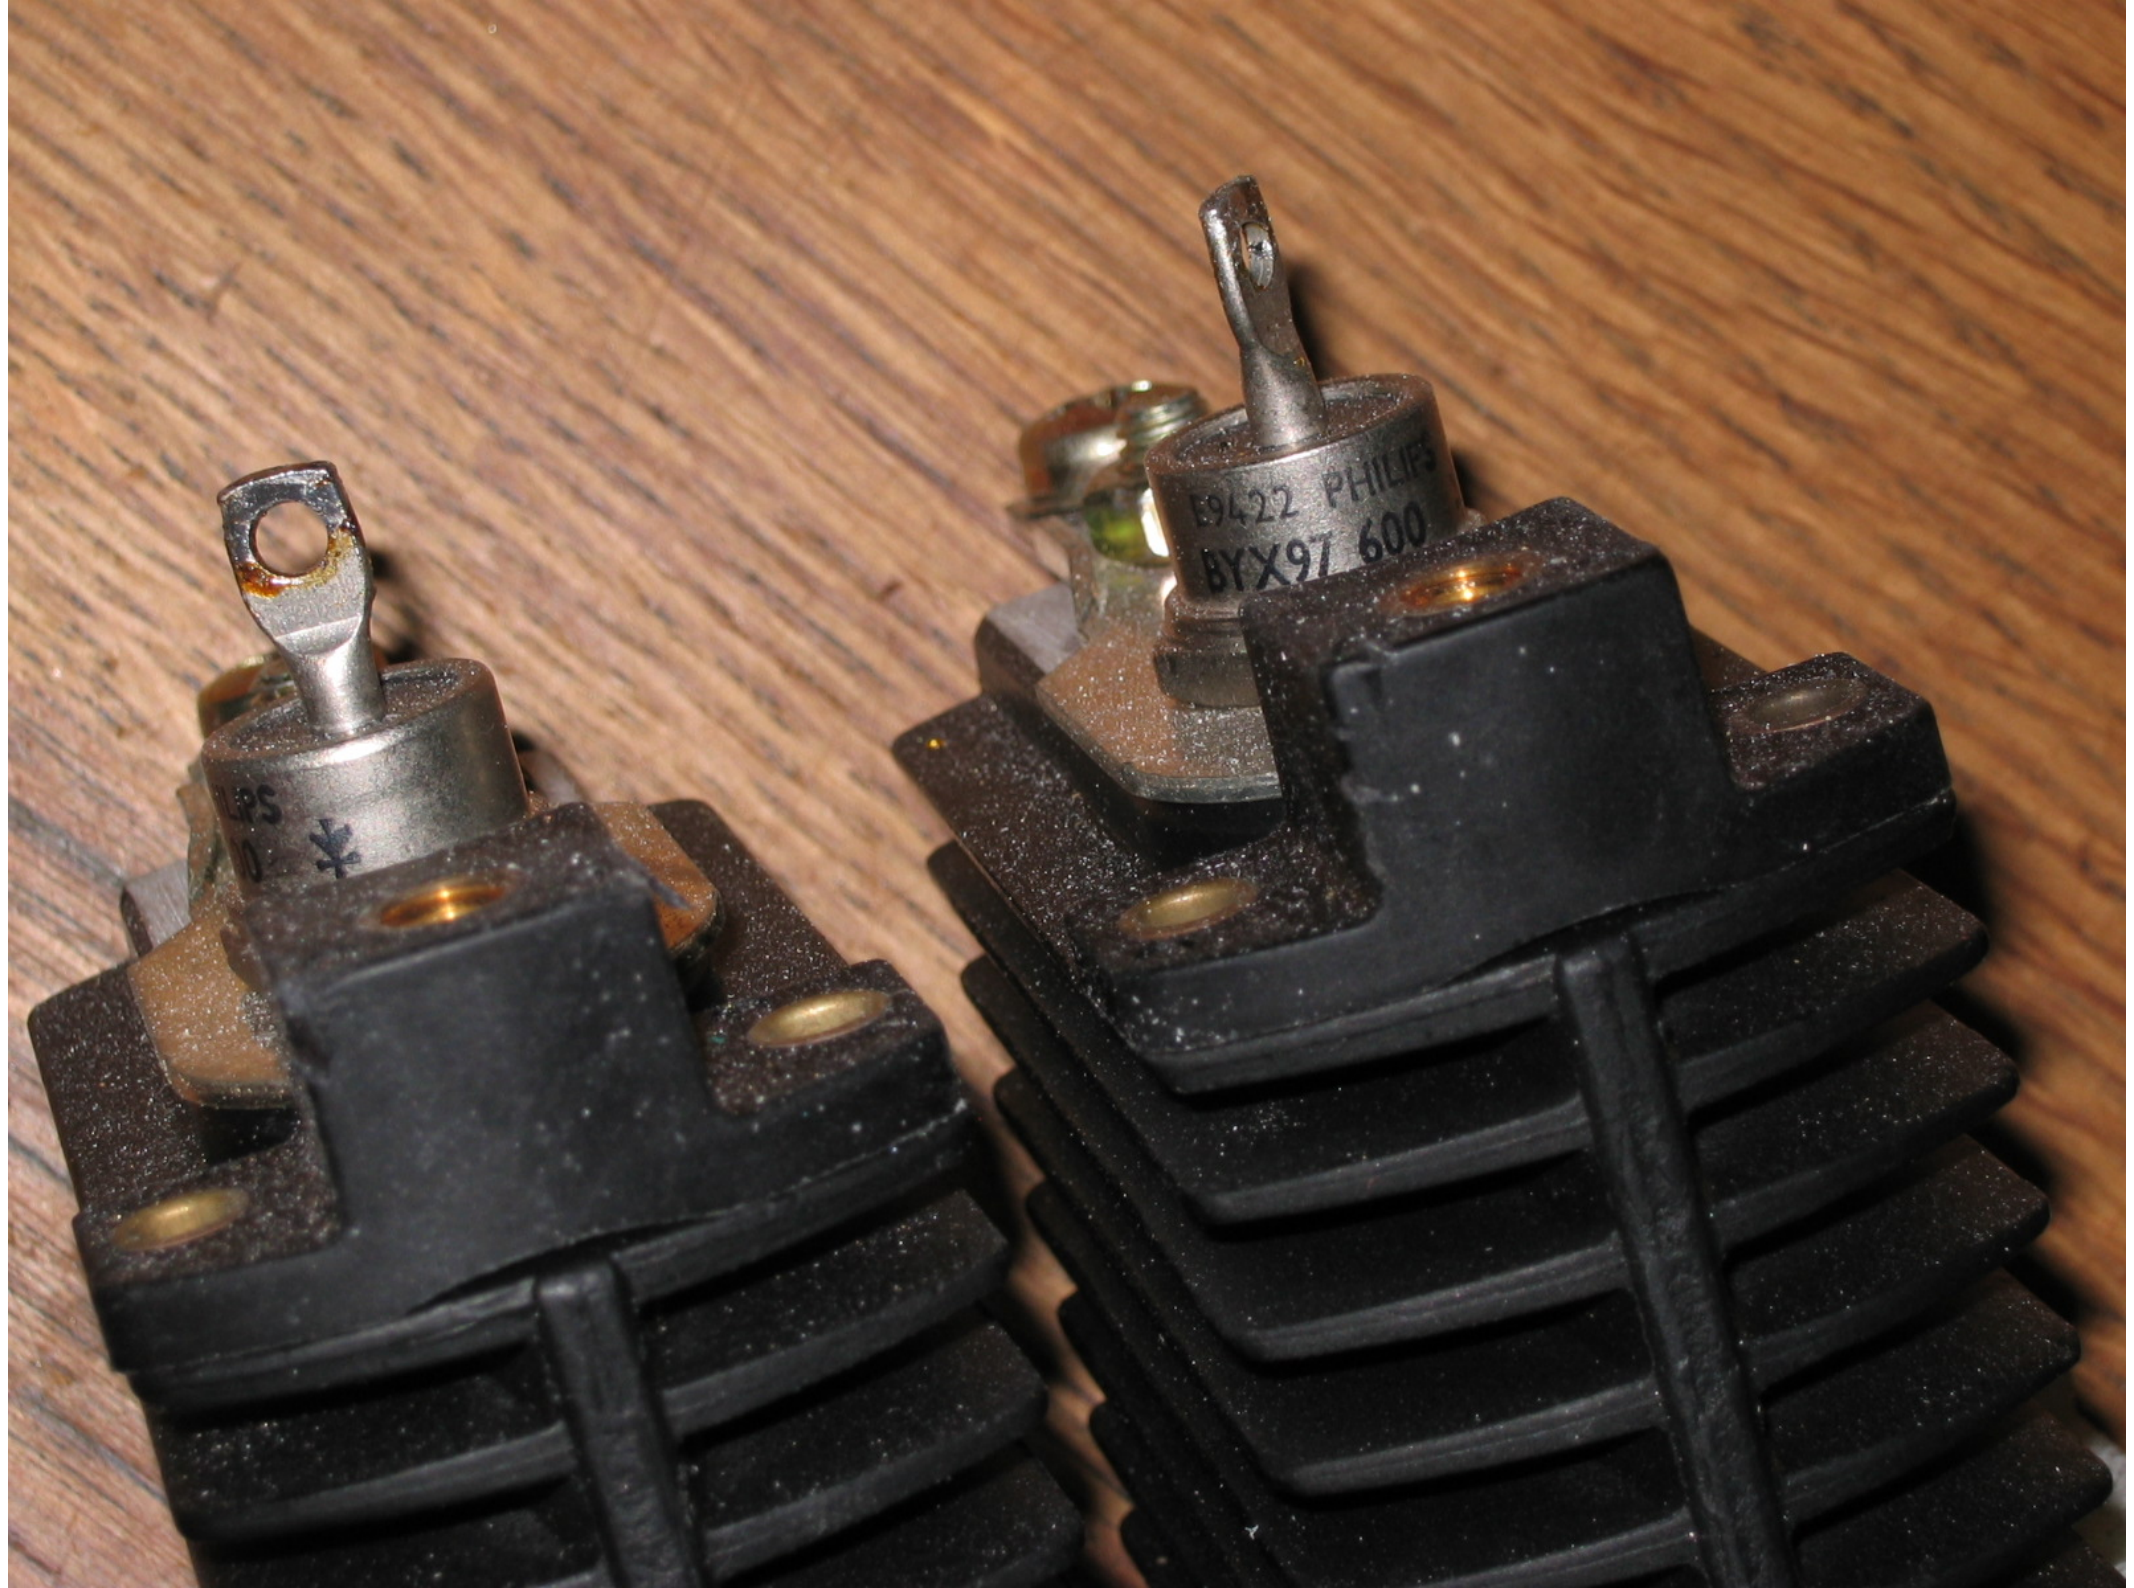












































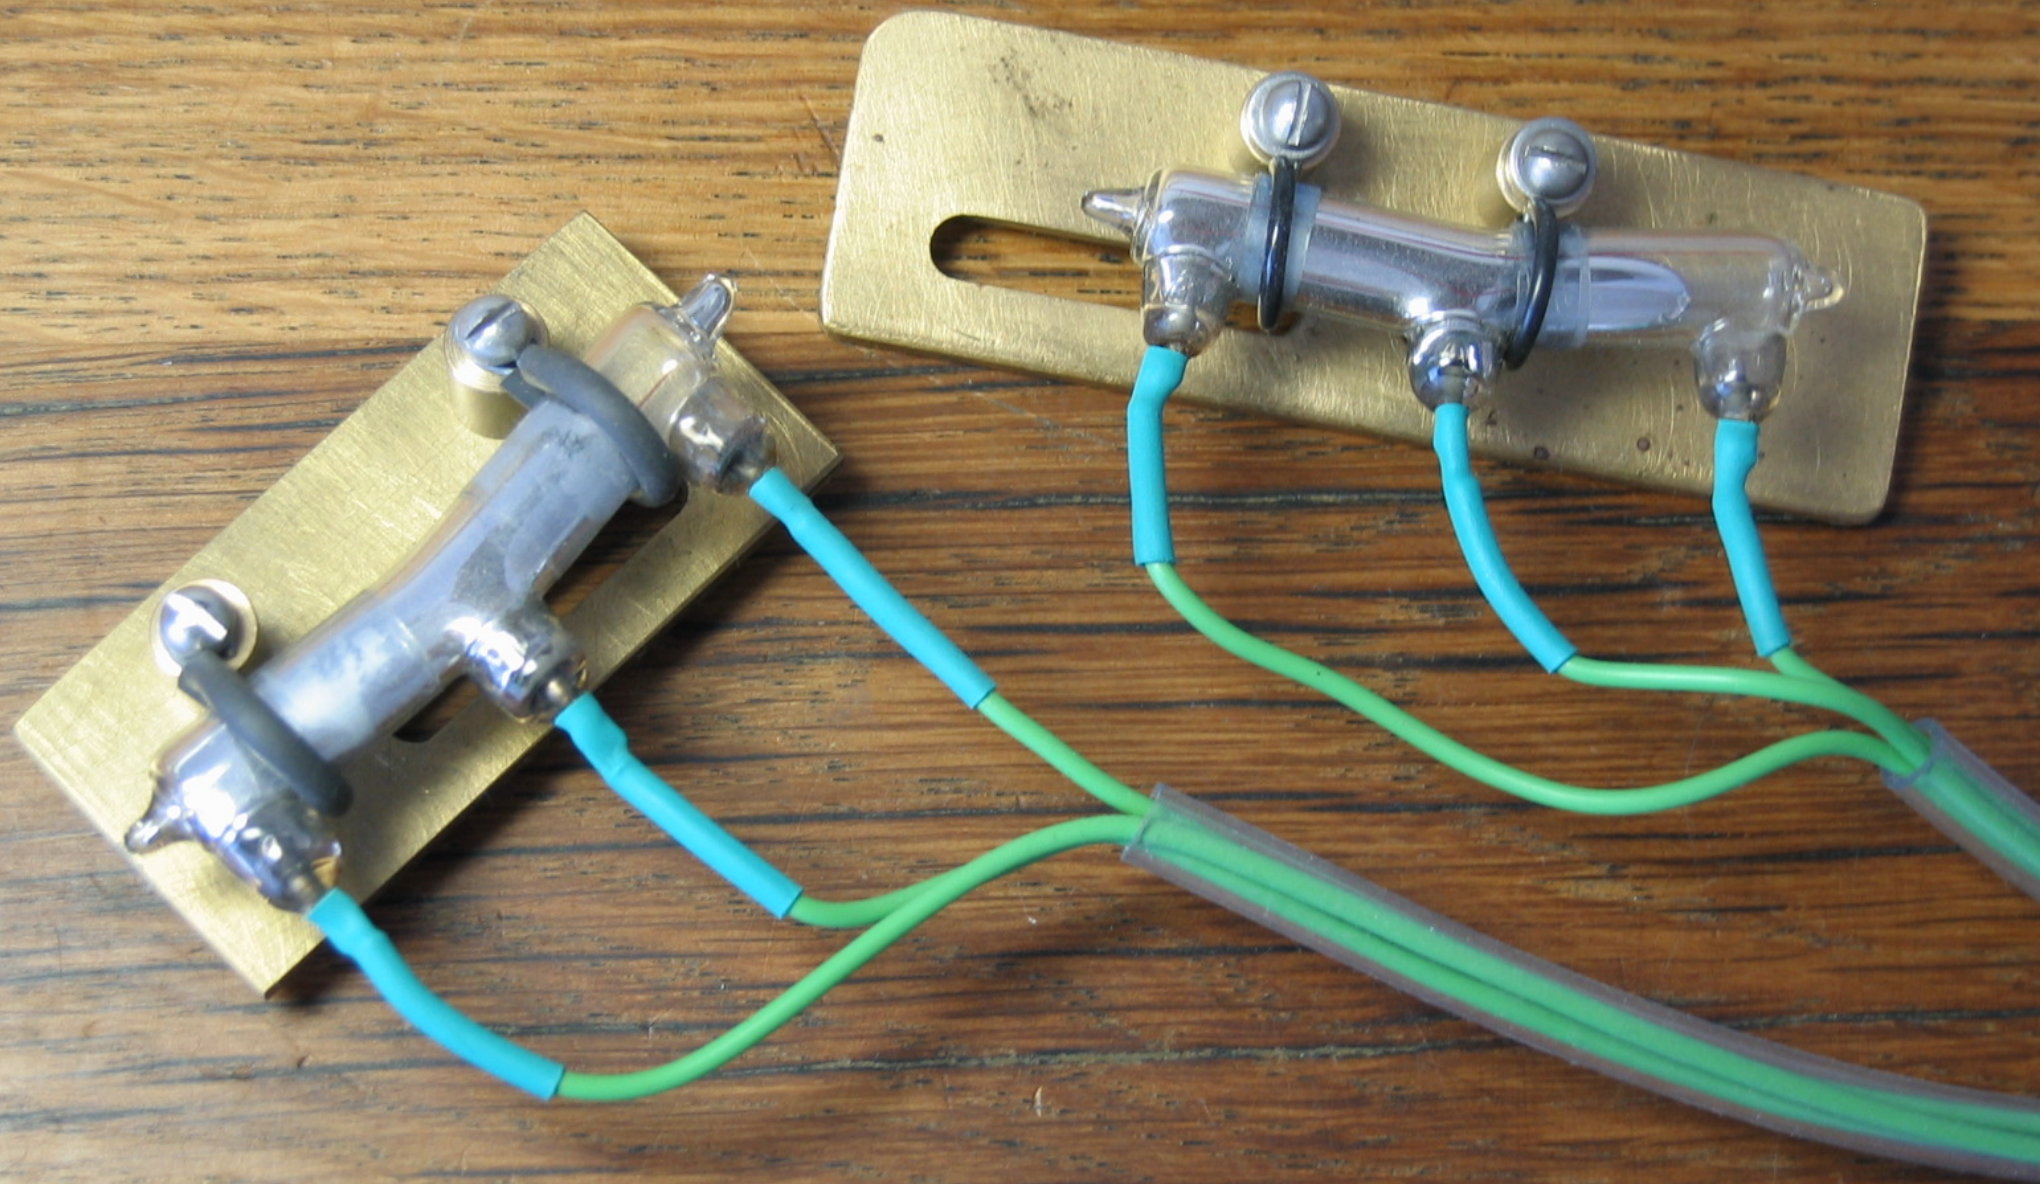

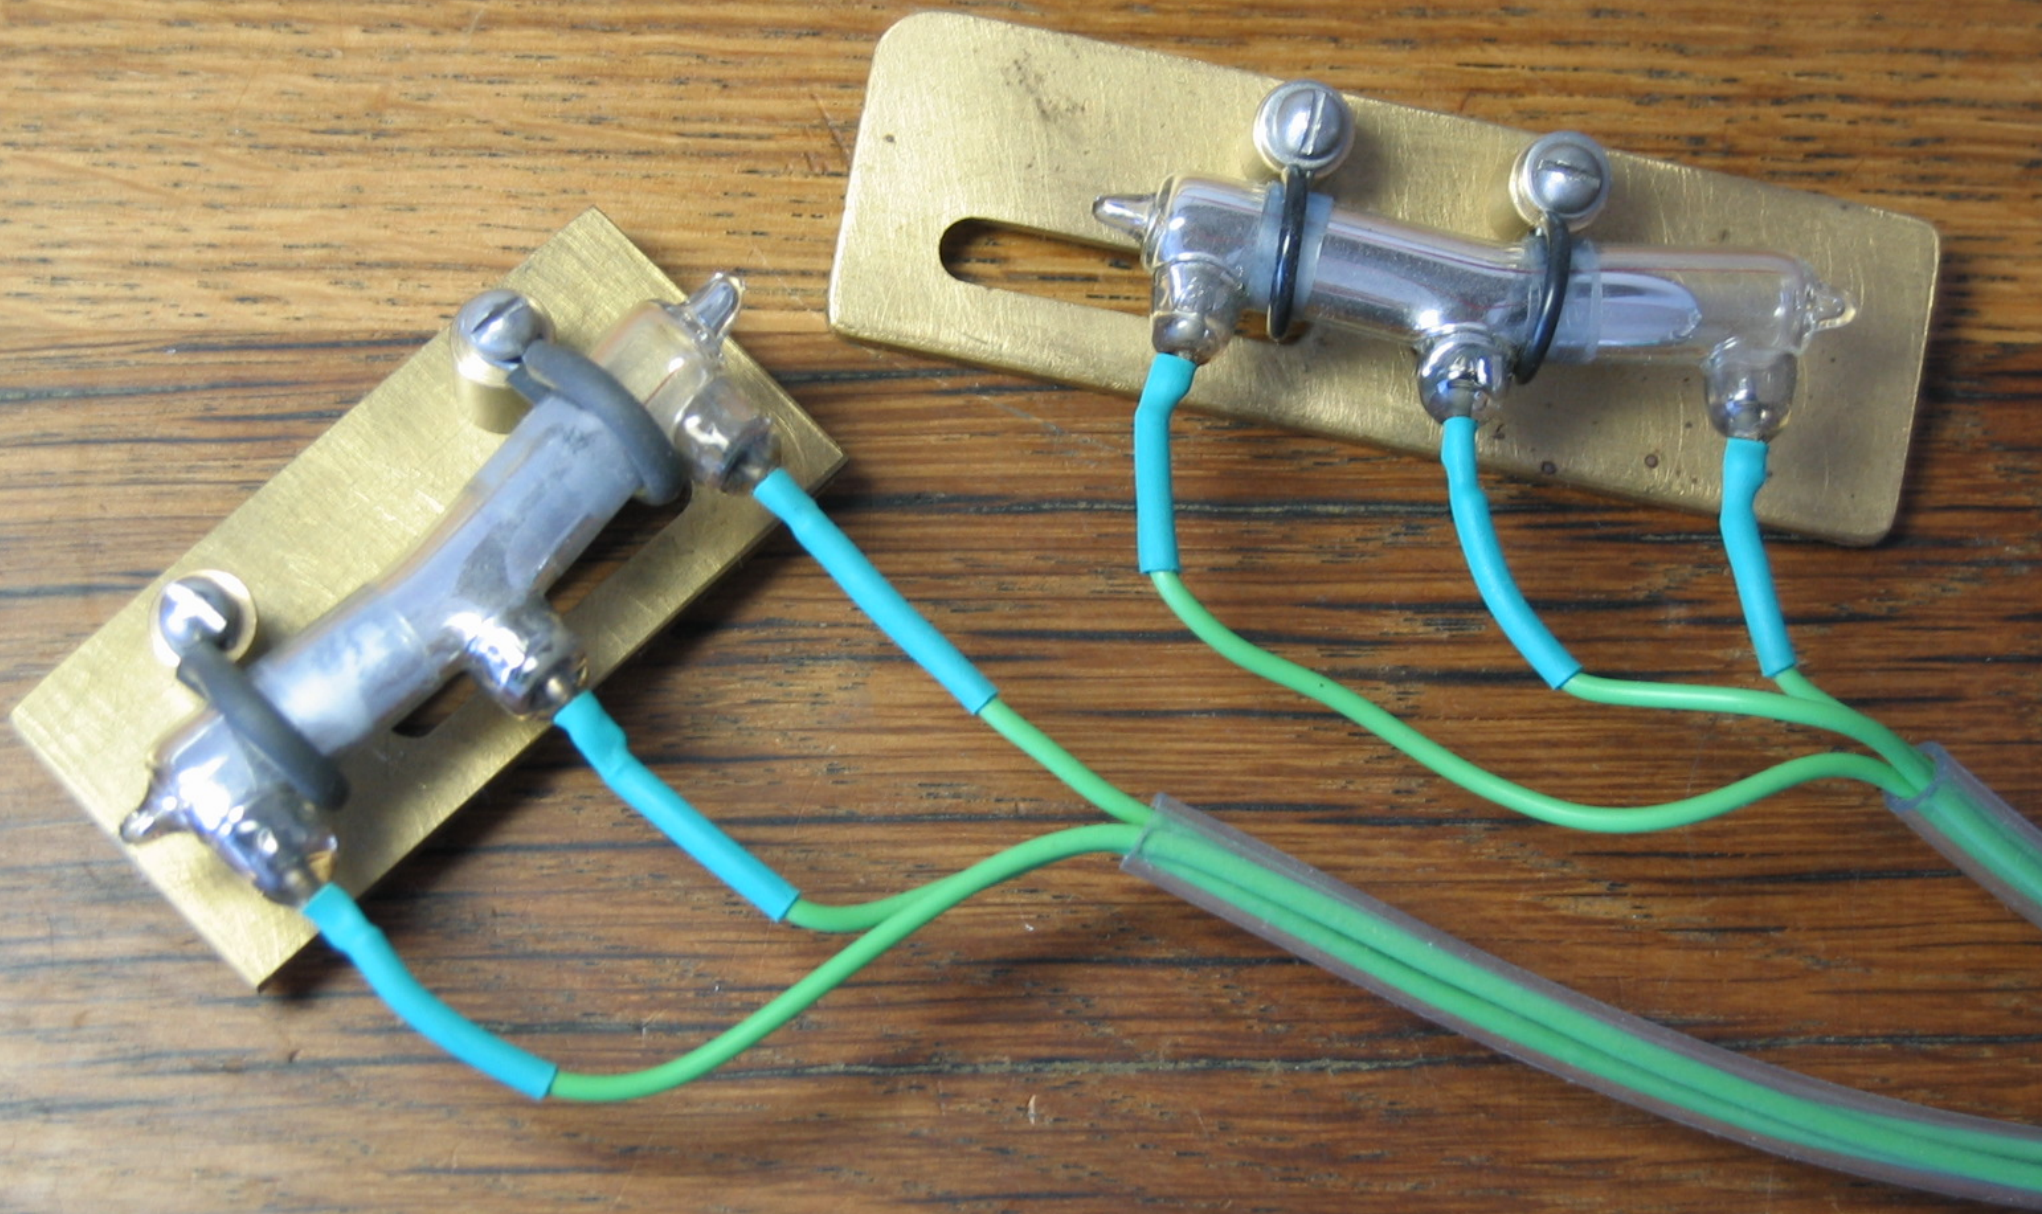

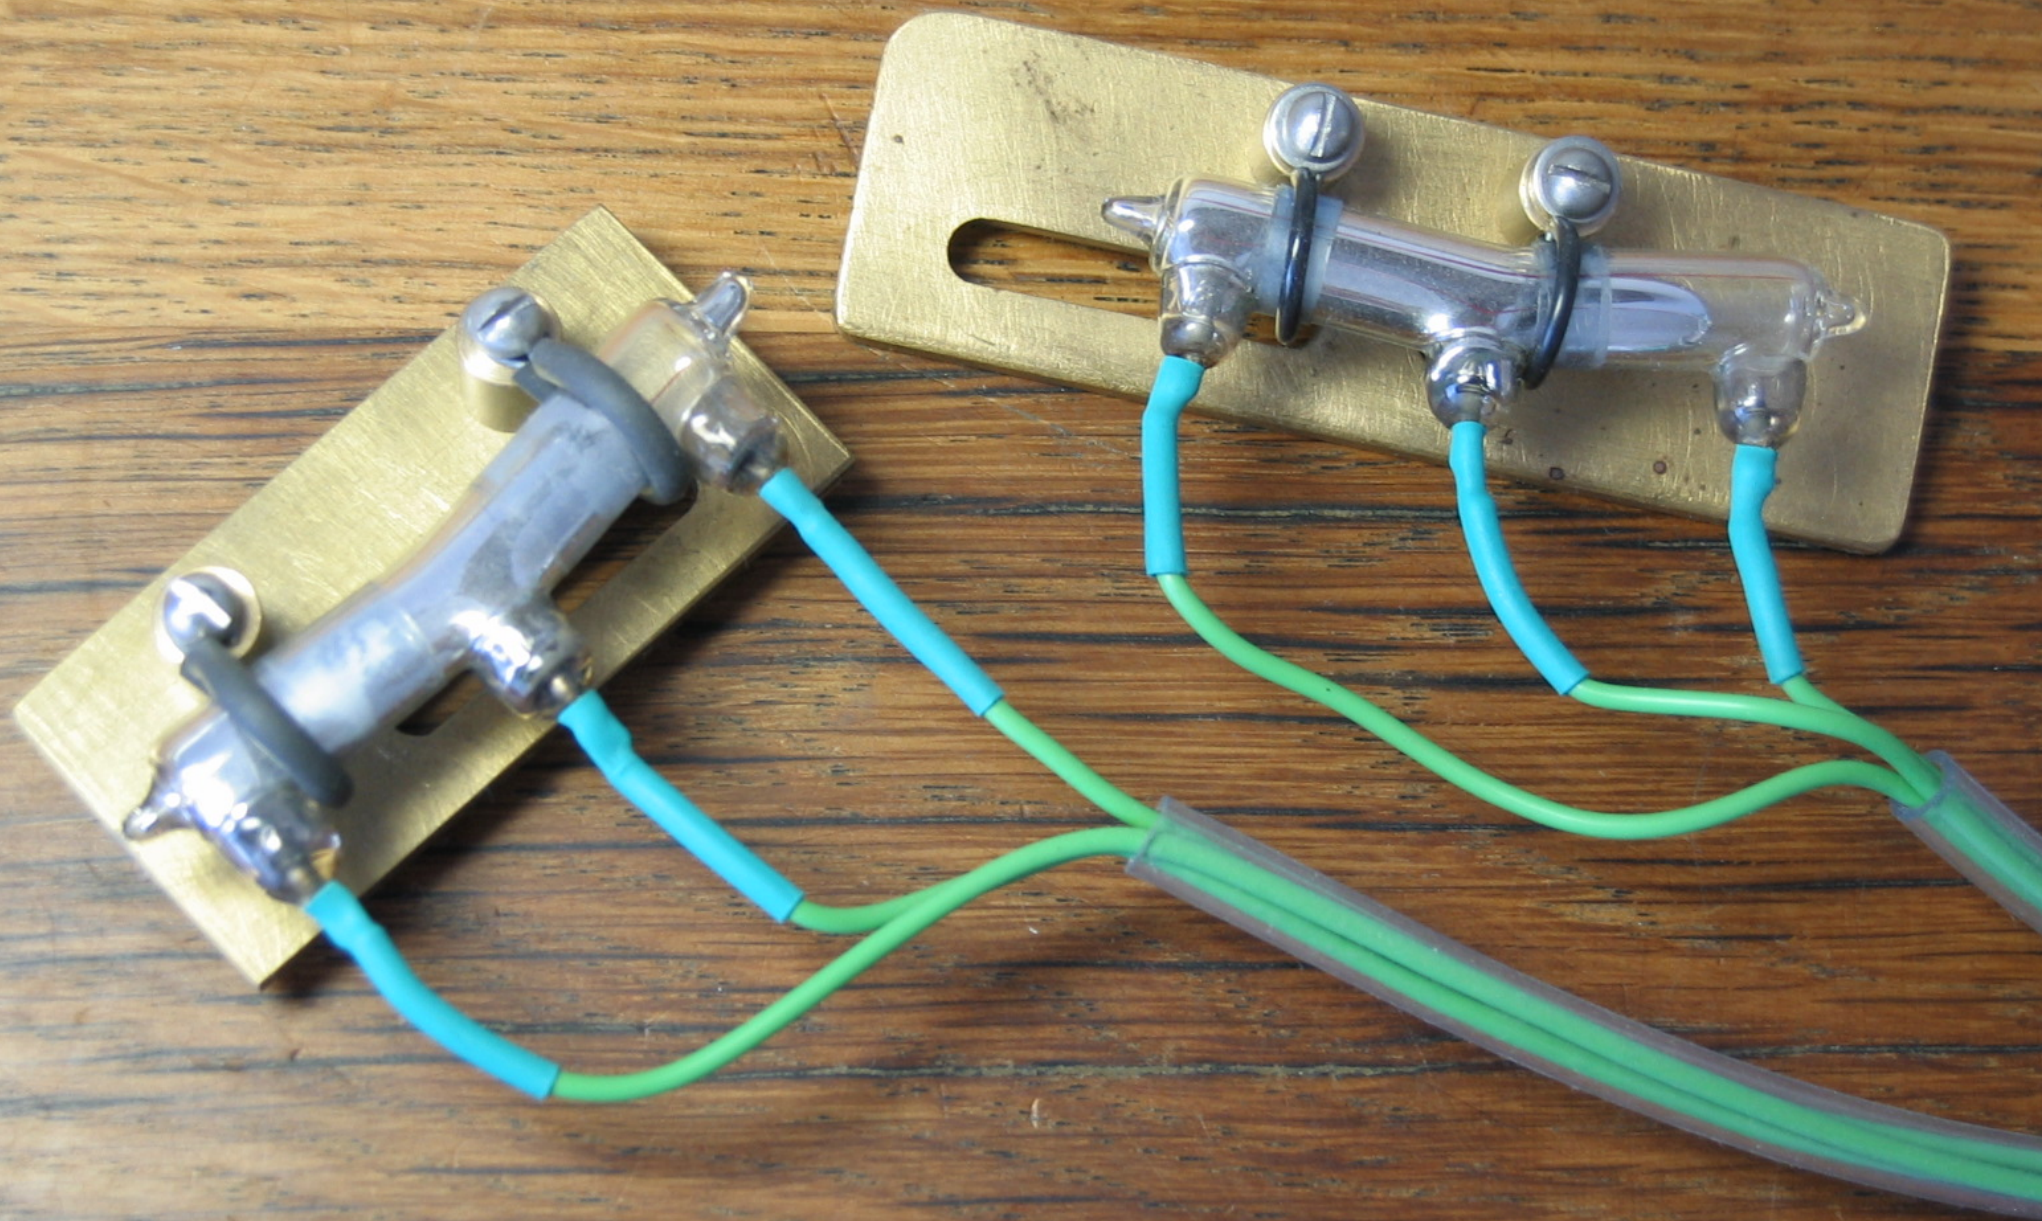


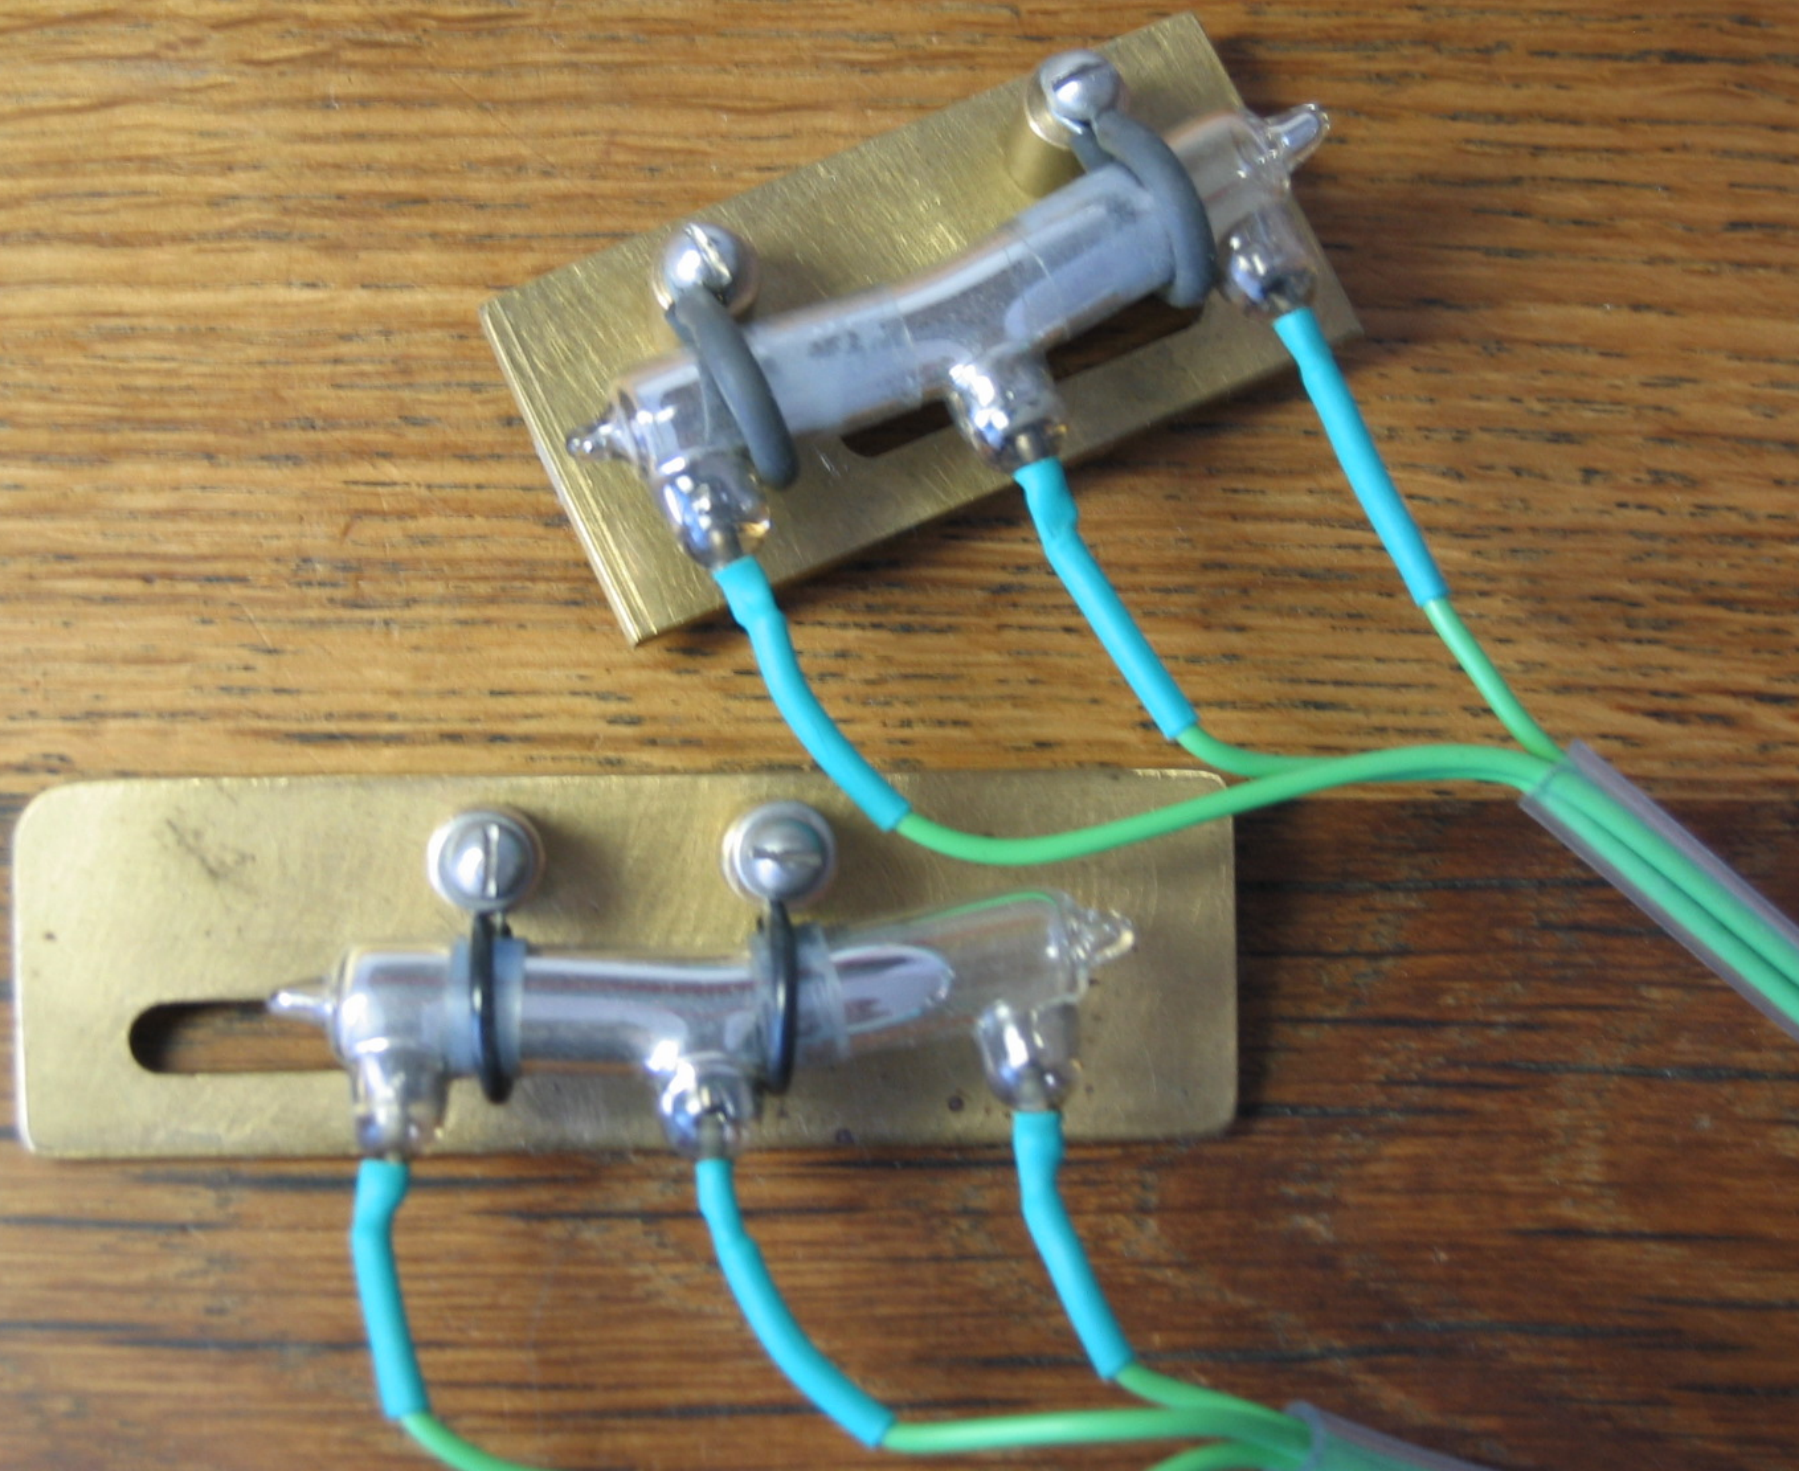

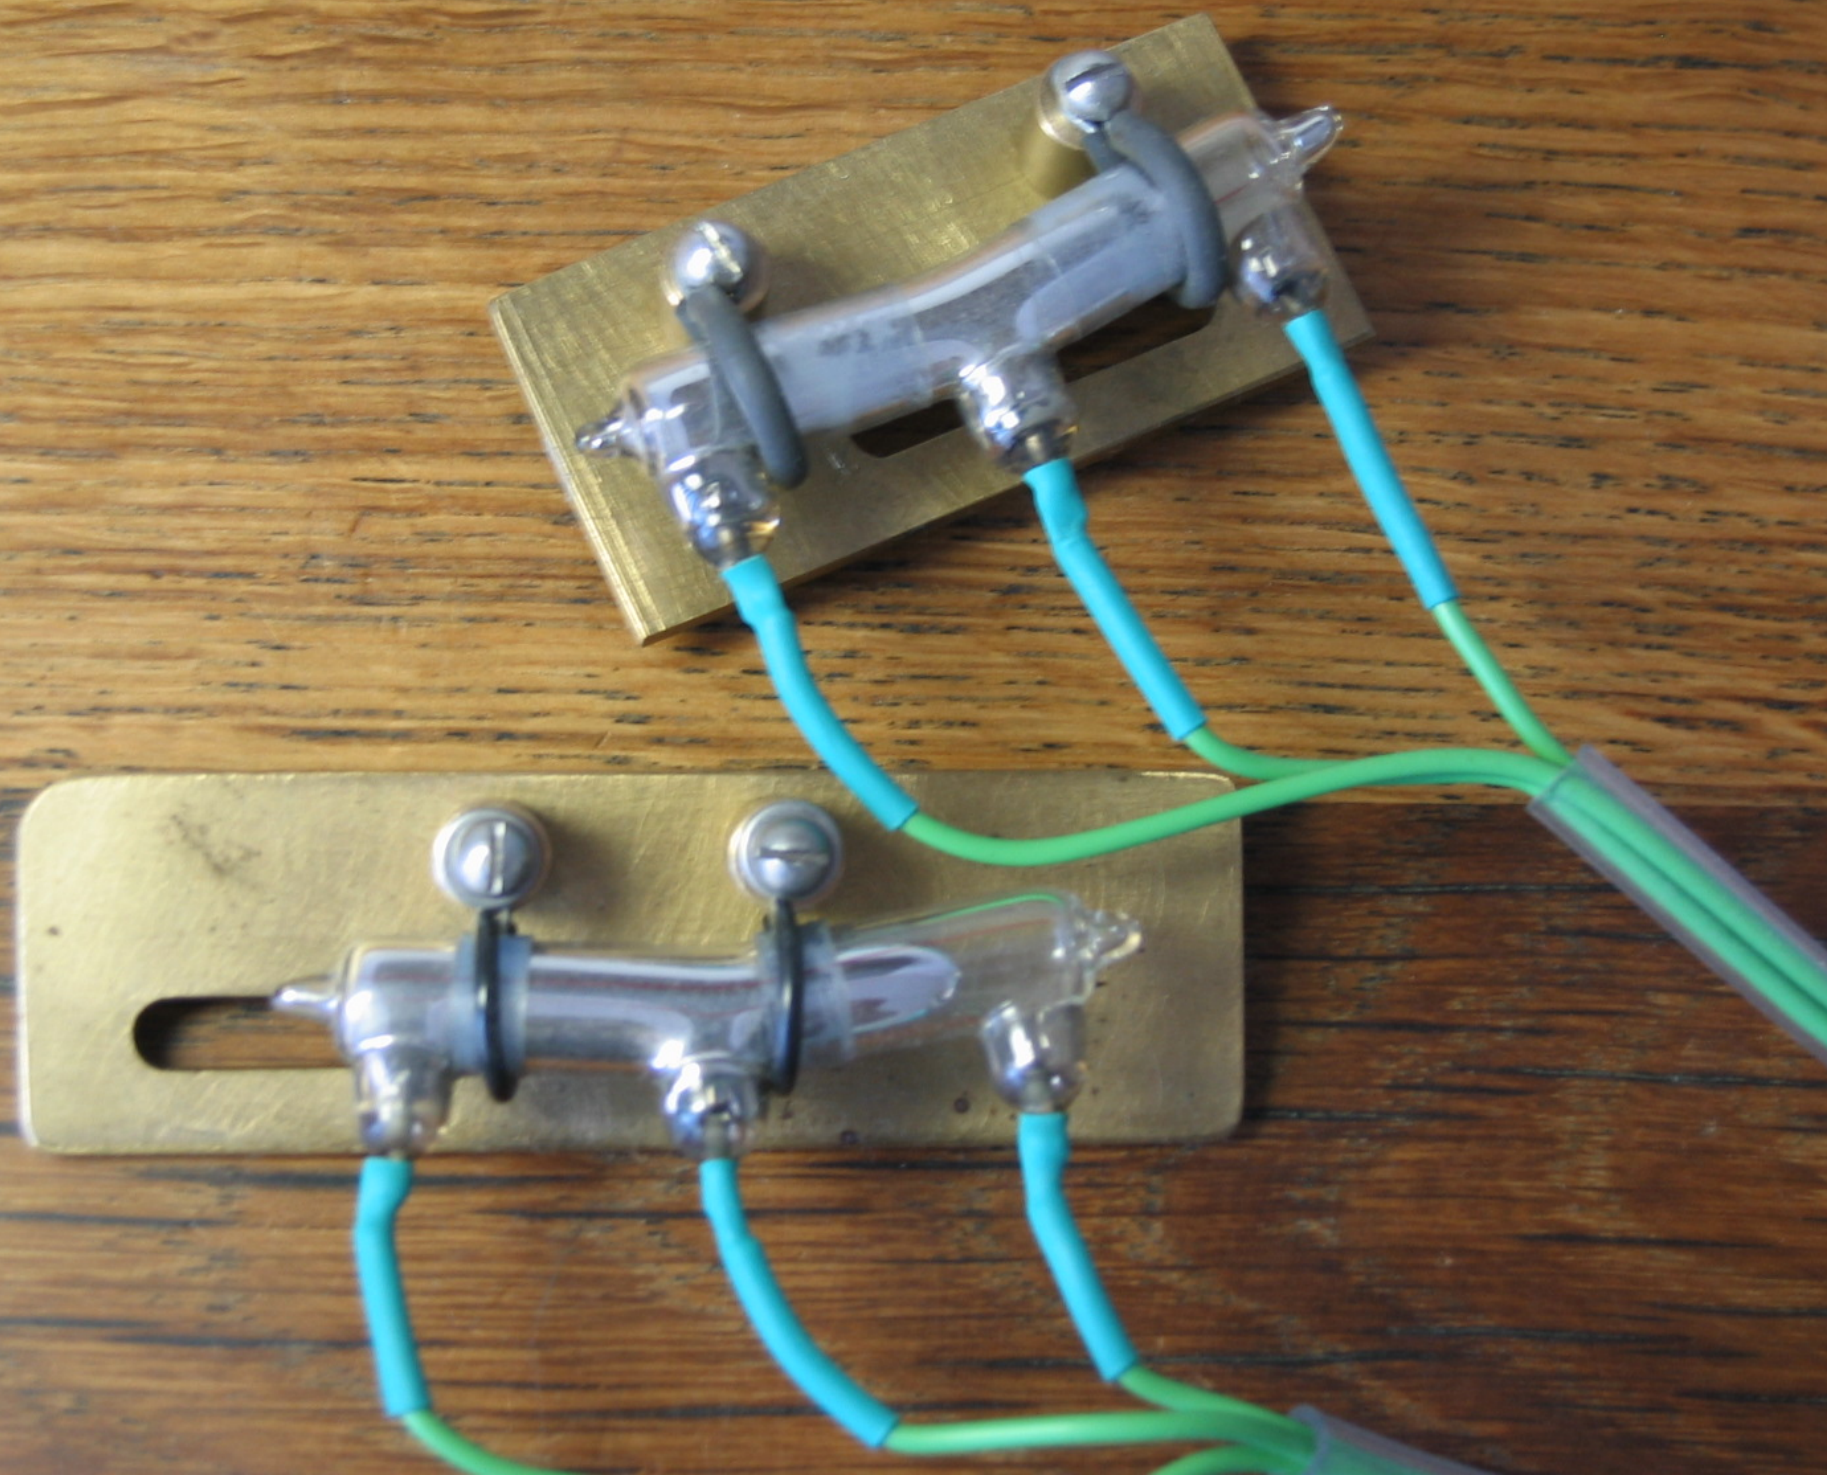





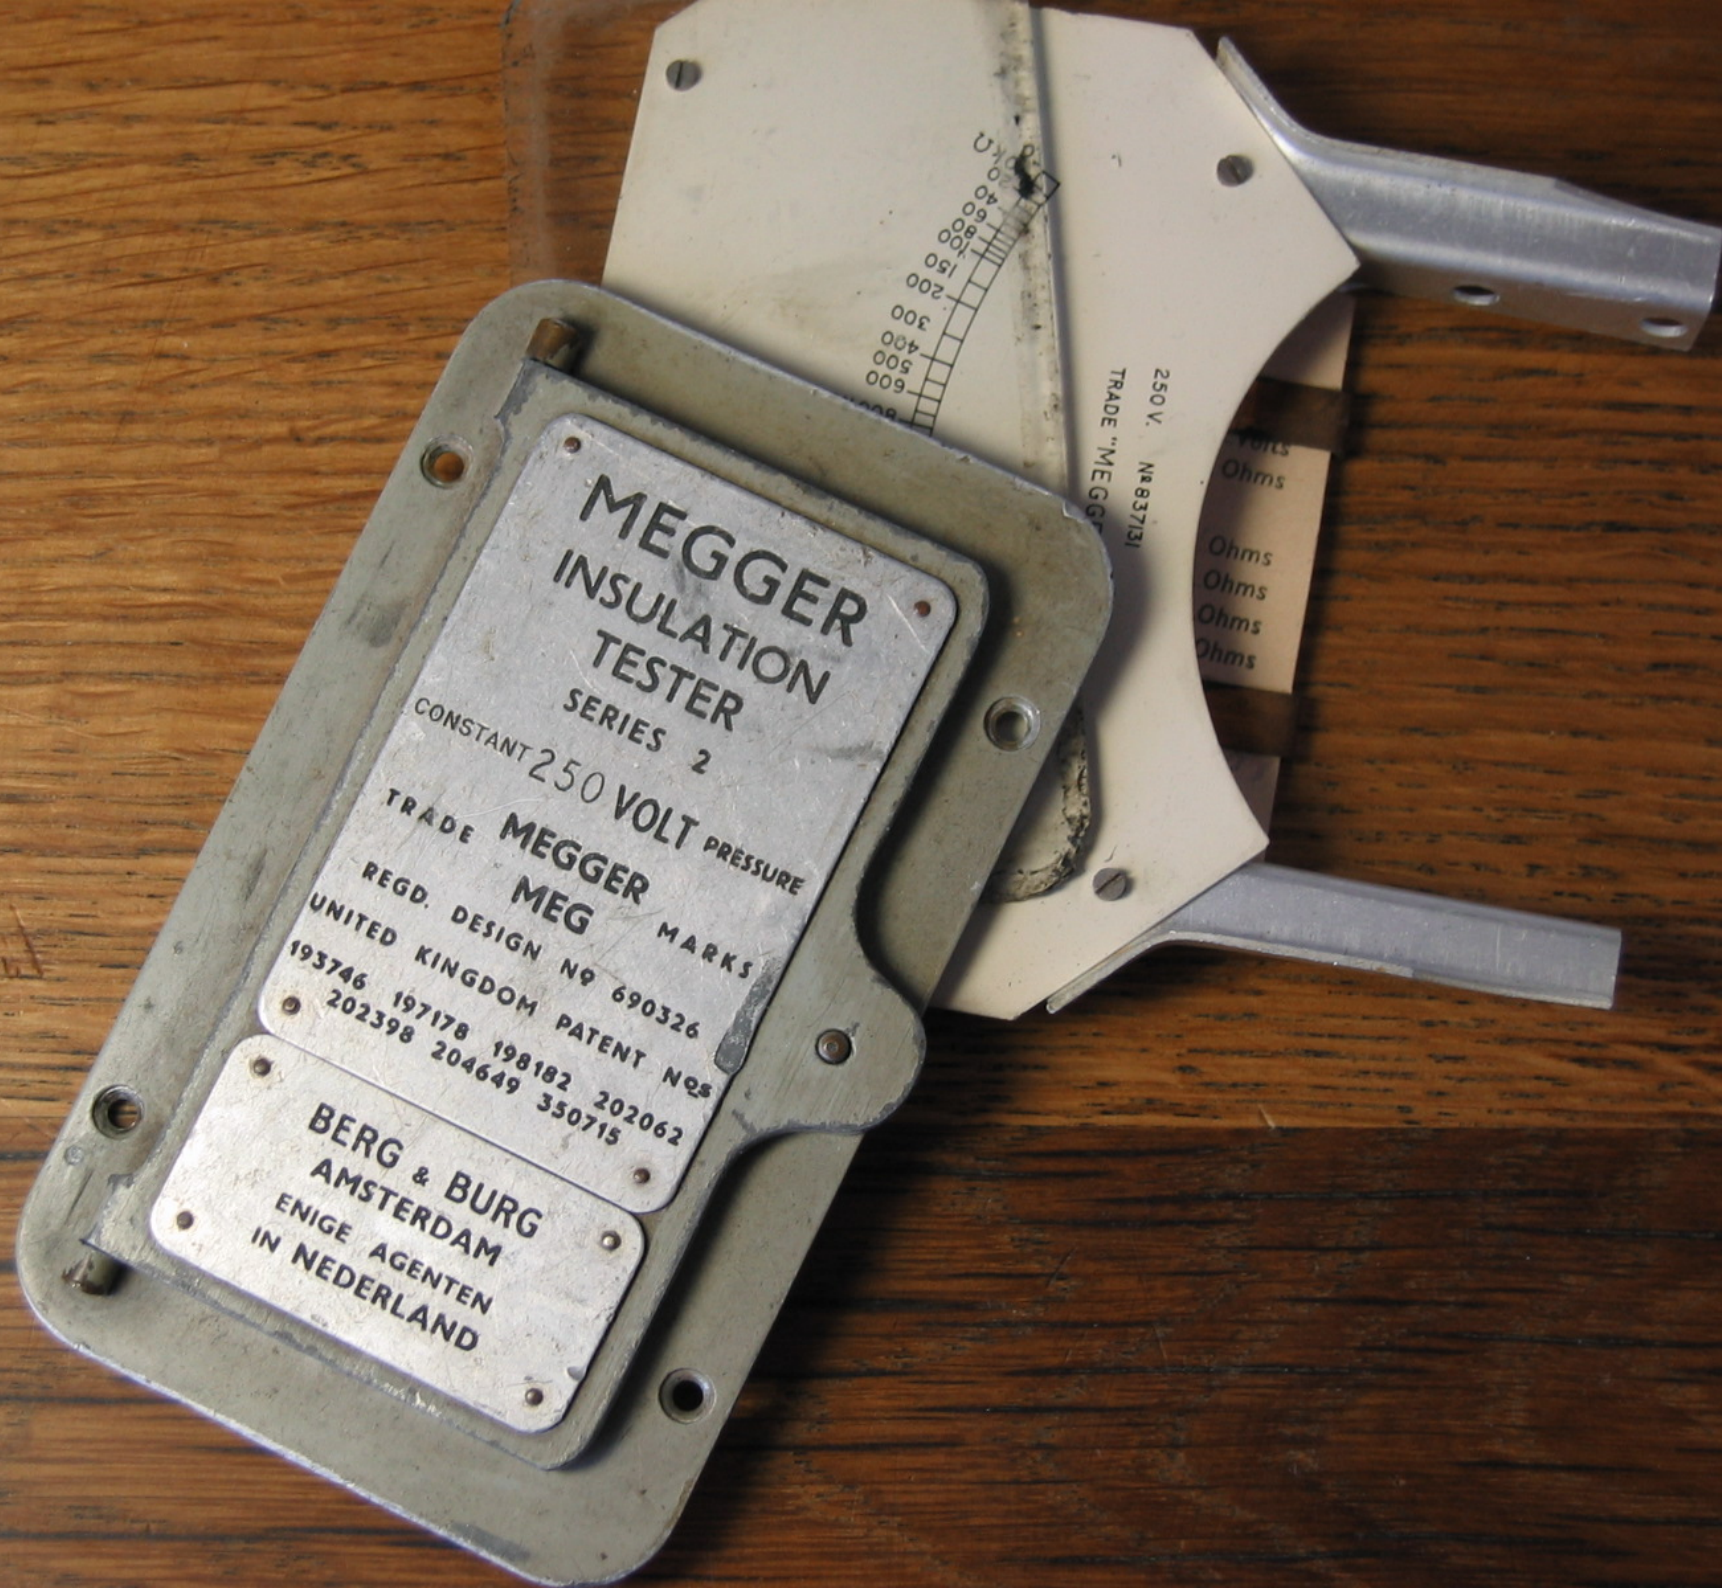

**MEGGER
INSULATION
TESTER**

SERIES 2

CONSTANT 250 VOLT PRESSURE

TRADE MEGGER
MEG

MARKS

REGD. DESIGN NO 690326

UNITED KINGDOM PATENT NOS
195746 197178 198182 202062
202398 204649 350715


**BERG & BURG
AMSTERDAM
ENIGE AGENTEN
IN NEDERLAND**

0 K.O.
60
80
100
150
200
300
400
500
600

250 V. No 837131
TRADE "MEGGER"

Volts
Ohms

Ohms
Ohms
Ohms
Ohms

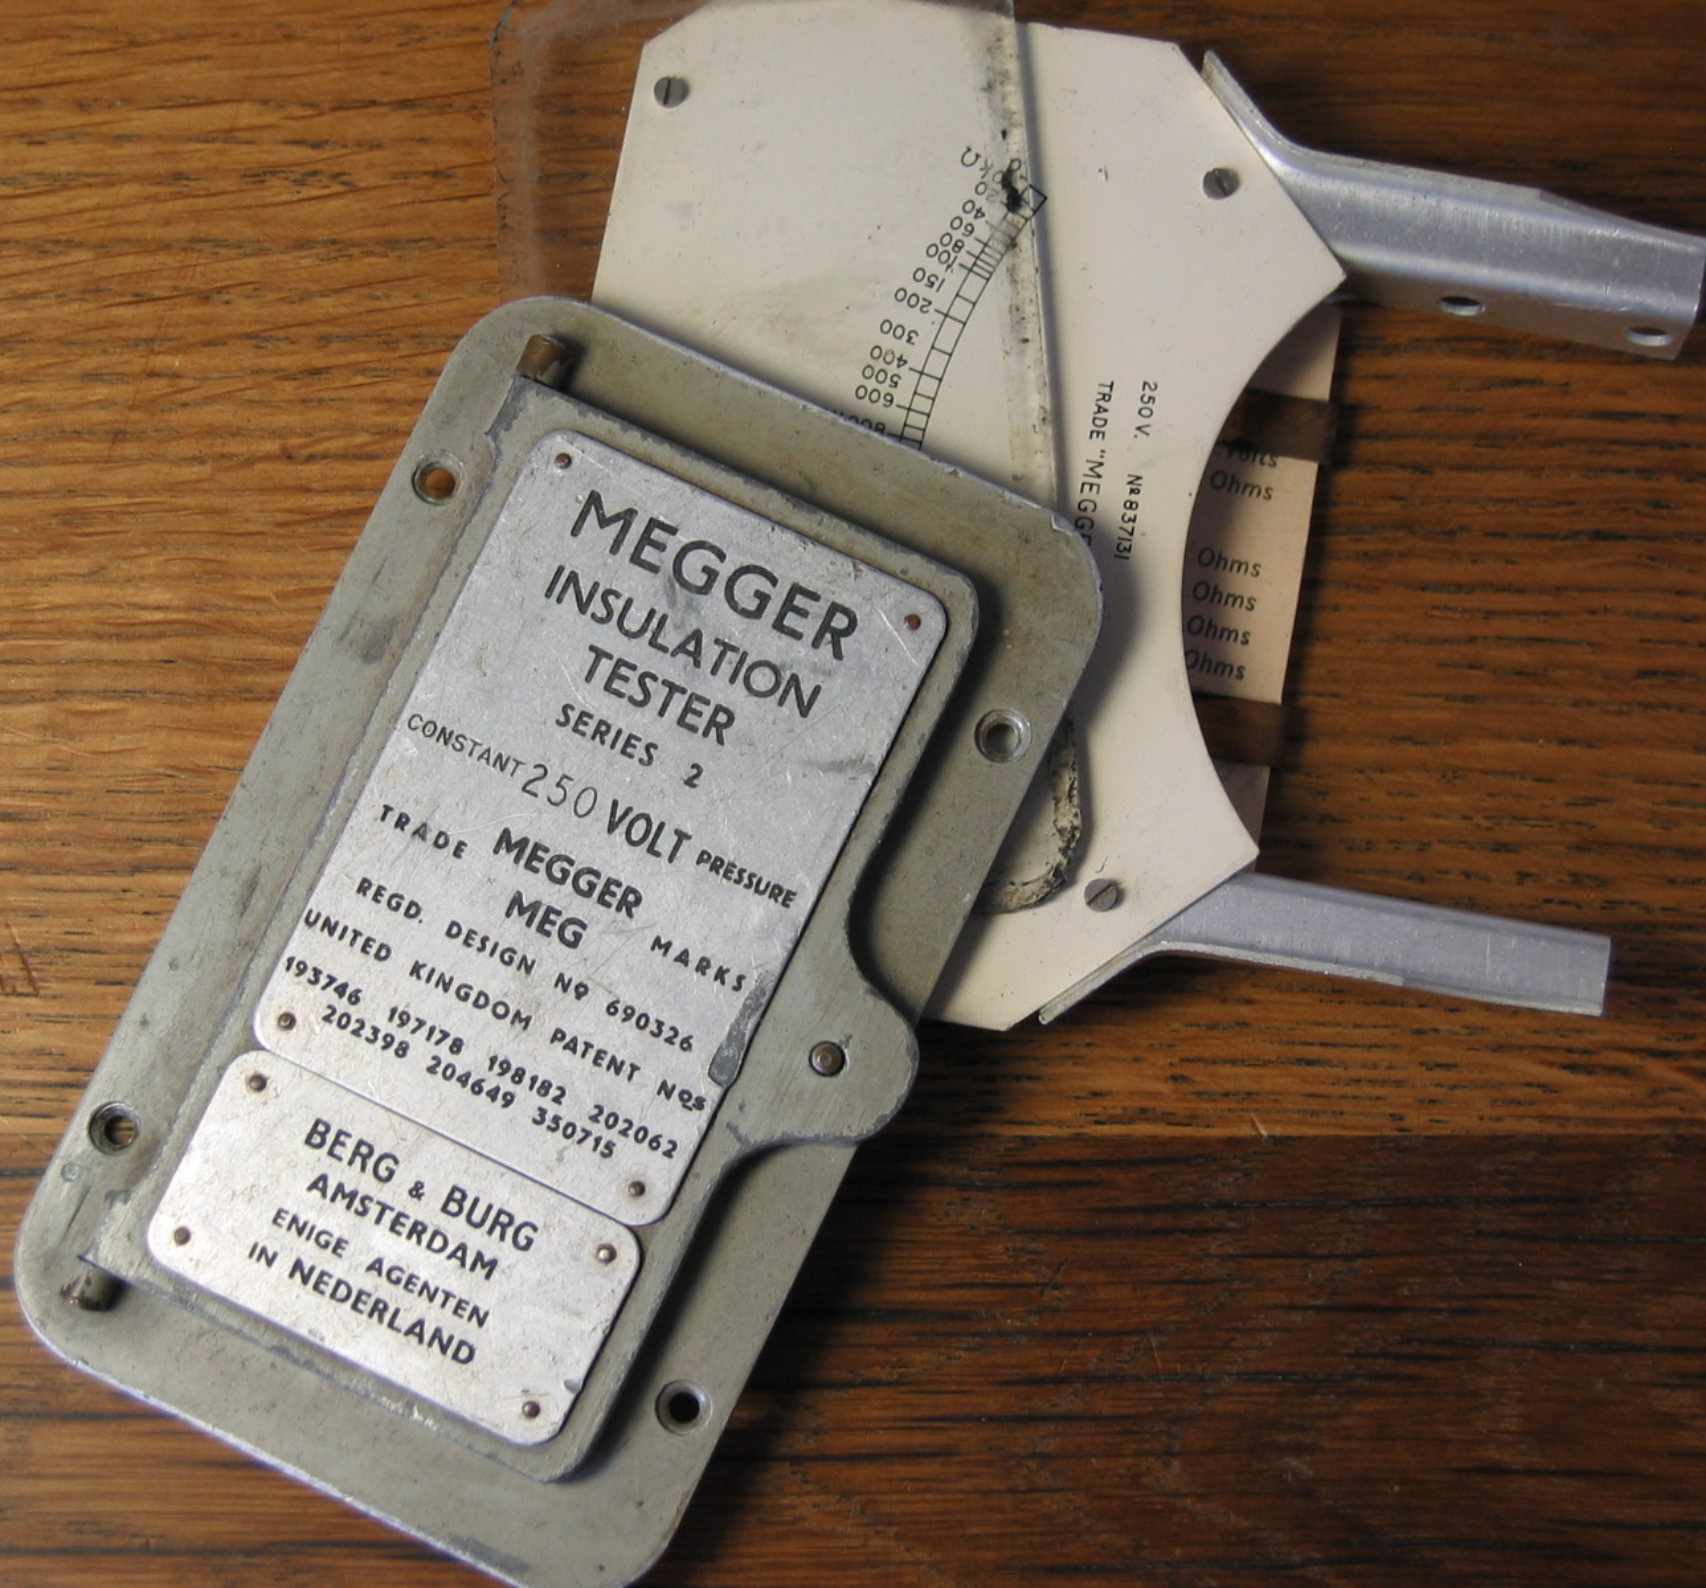

**MEGGER
INSULATION
TESTER**


SERIES 2

CONSTANT 250 VOLT PRESSURE

TRADE MEGGER
MEG MARKS


REGD. DESIGN NO 690326
UNITED KINGDOM PATENT NOS
195746 197178 198182 202062
202398 204649 350715

**BERG & BURG
AMSTERDAM
ENIGE AGENTEN
IN NEDERLAND**



250 V. No 837131
TRADE "MEGGER"

Volts
Ohms
Ohms
Ohms
Ohms

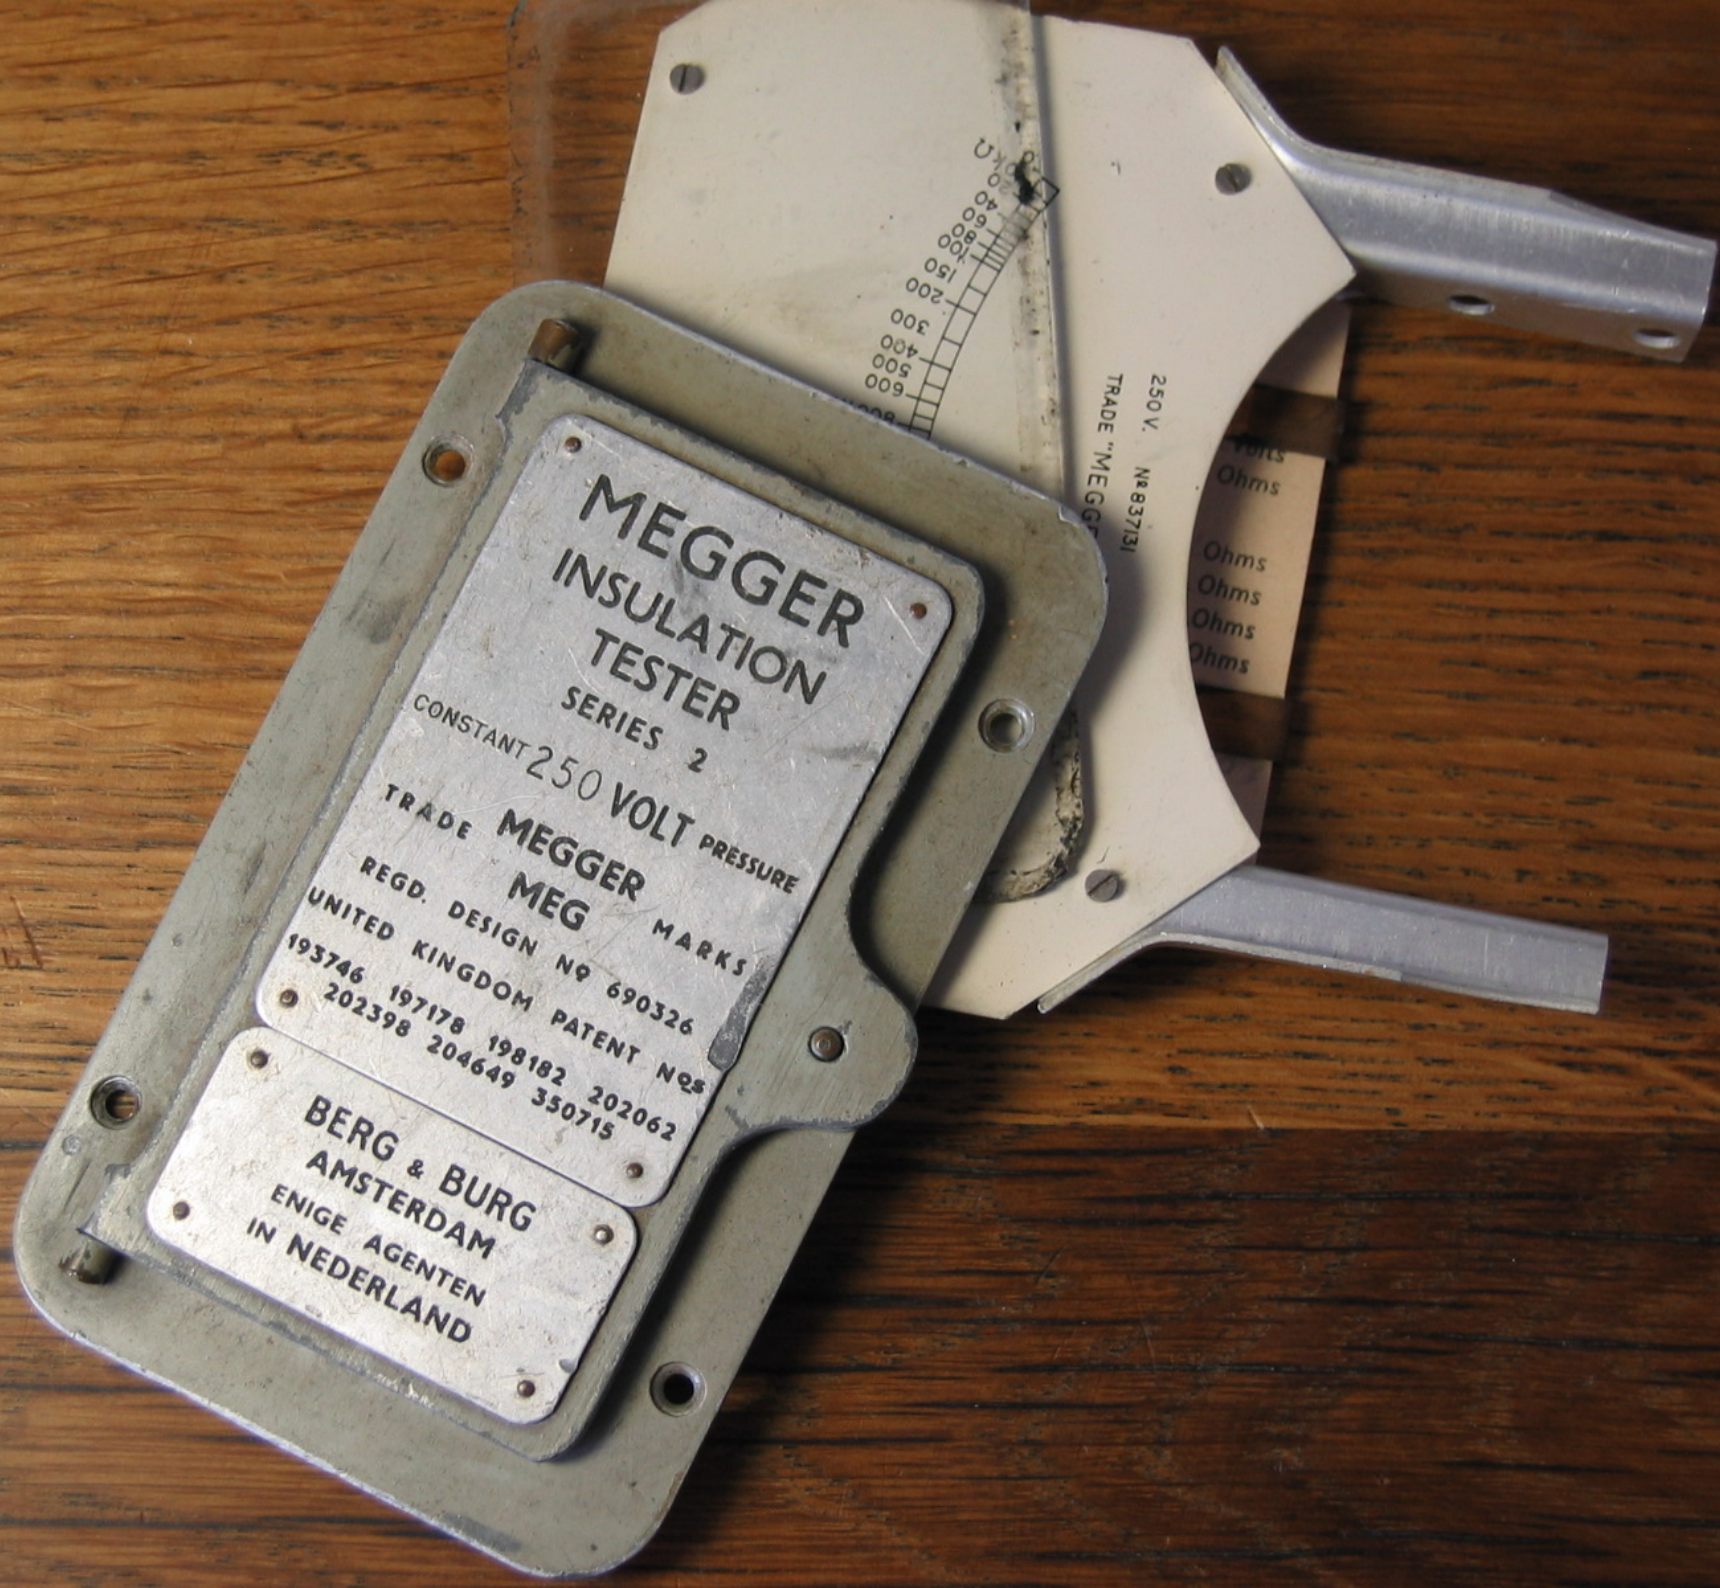

**MEGGER
INSULATION
TESTER**


SERIES 2
CONSTANT 250 VOLT PRESSURE

TRADE MEGGER
MEG

MARKS

REGD. DESIGN NO 690326
UNITED KINGDOM PATENT NOS
193746 197178 198182 202062
202398 204649 350715

**BERG & BURG
AMSTERDAM
ENIGE AGENTEN
IN NEDERLAND**



250 V. No 837131
TRADE "MEGGER"

Volts
Ohms
Ohms
Ohms
Ohms






























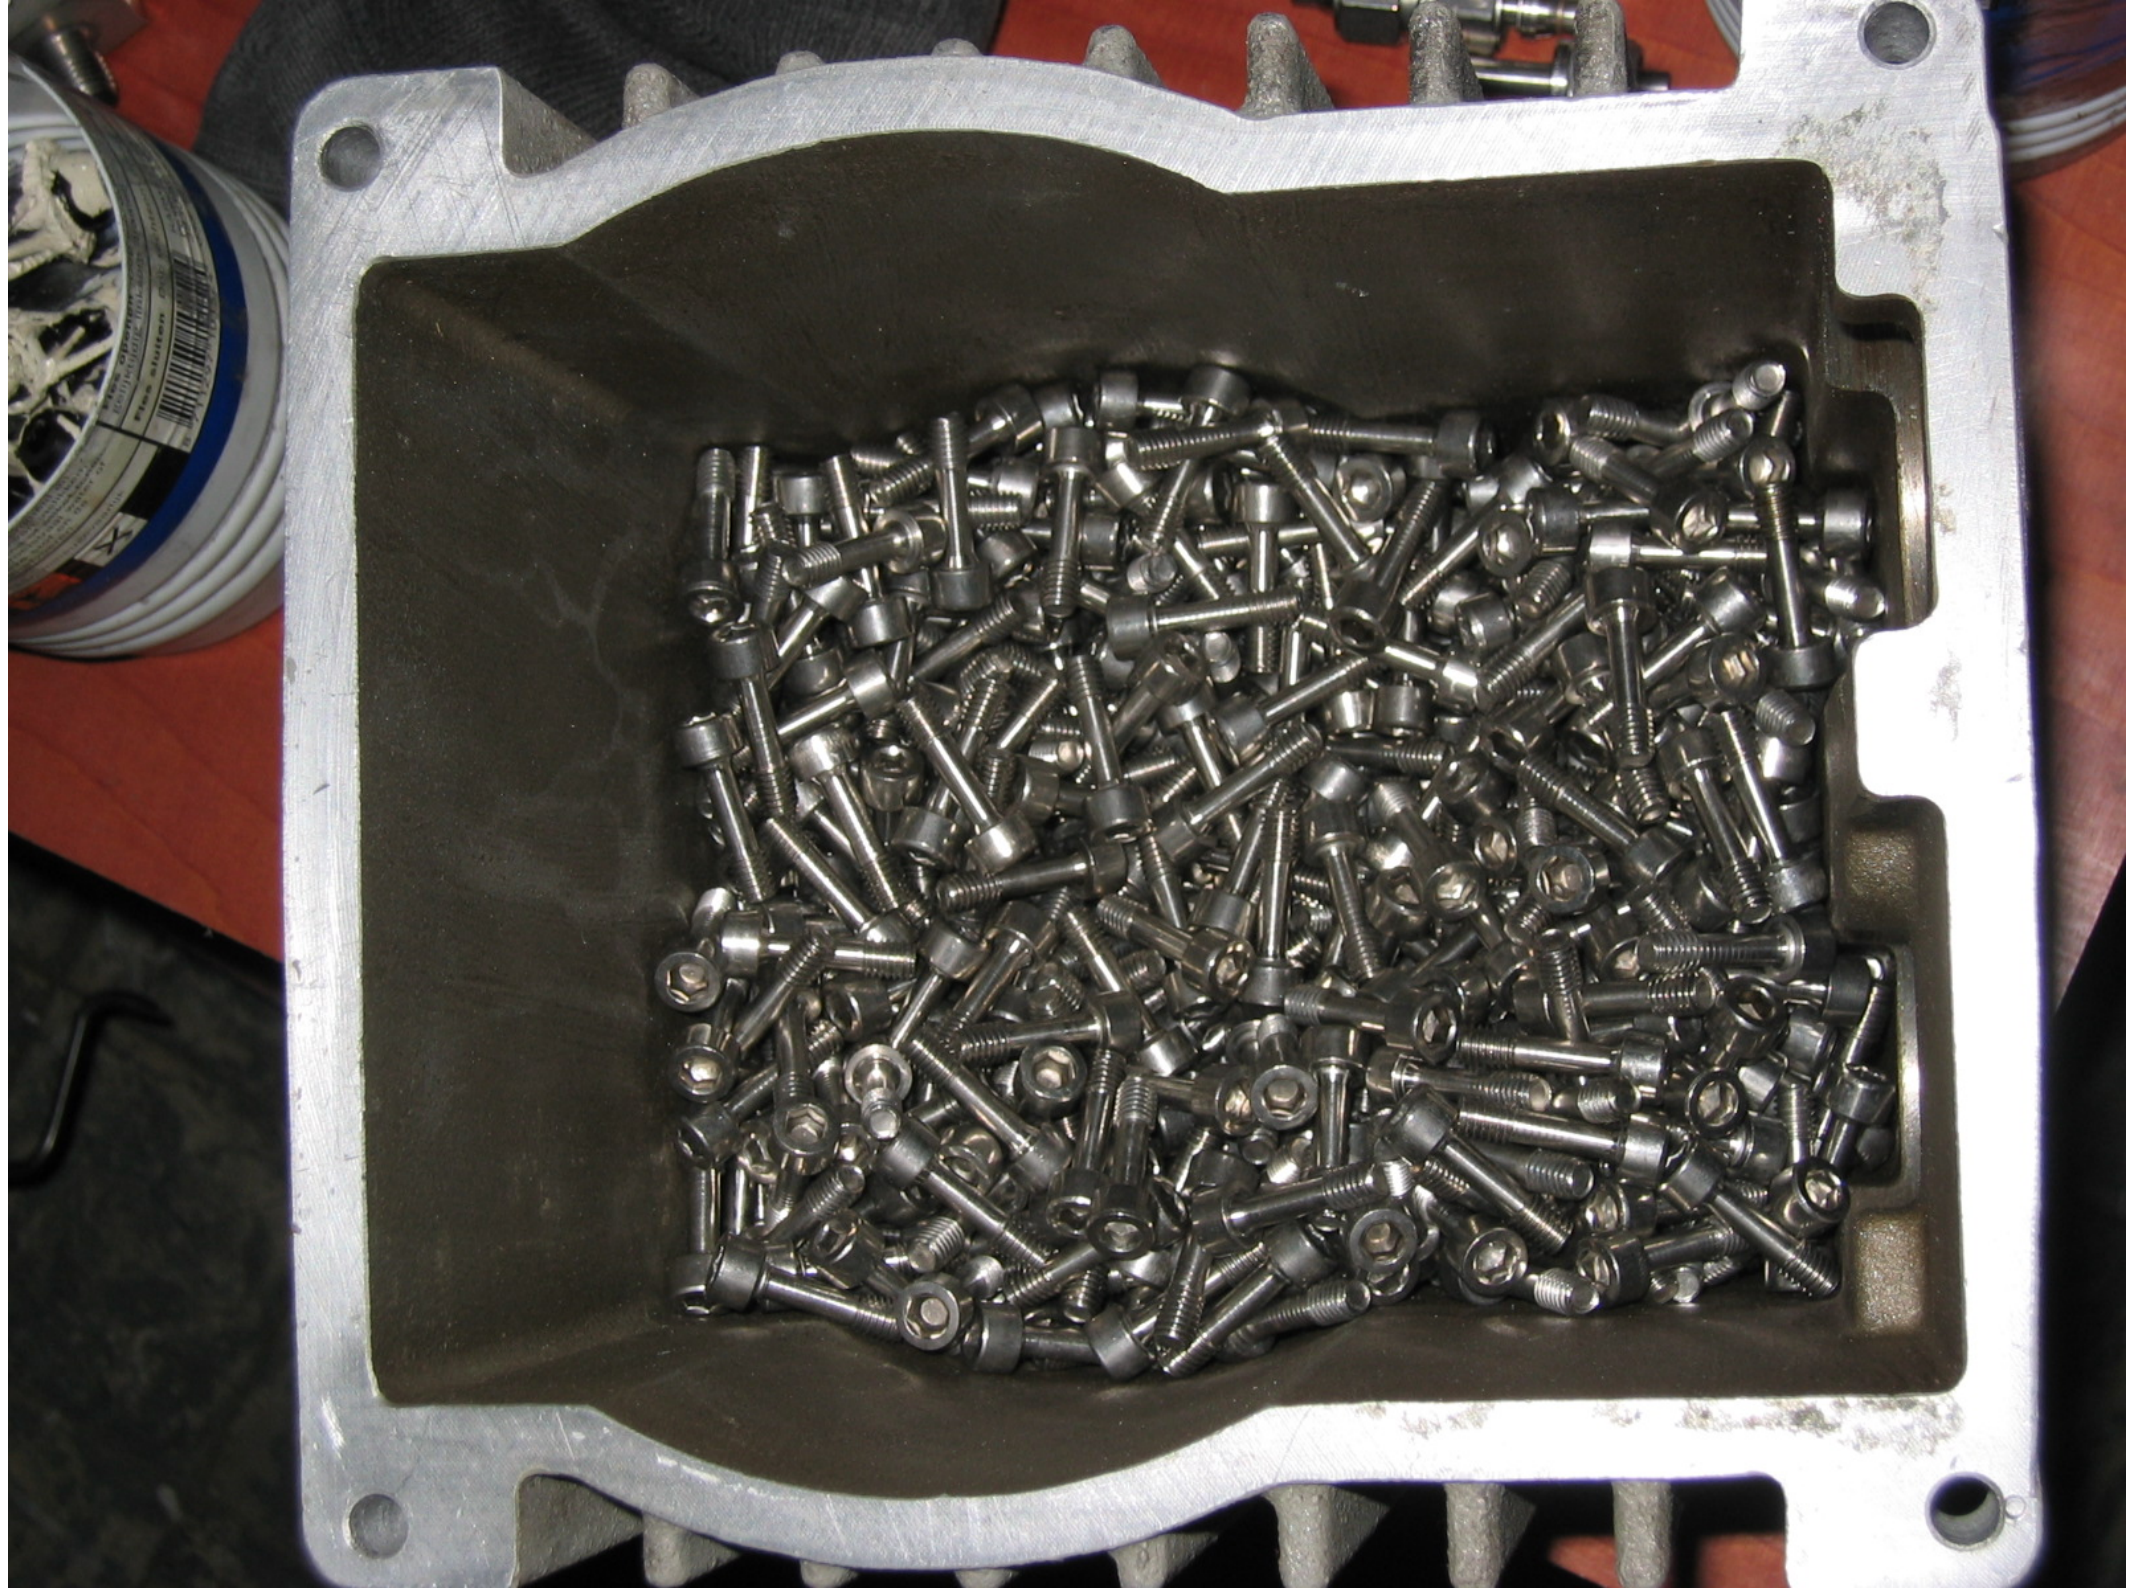





KART

KEER OP KEER VERASSEND







PURLIN
Schuurvezel
Fibre abrasive
Bralda paville
Reinigingsvlies
Fibra abrasiva

SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 L
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 D
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 L
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 D

WHITE PETROLEUM
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 L
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 D

NOIR • BLACK •
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 L
SAFETY WARNING
WEAR EYE, FACE AND BODY
PROTECTION WHEN GRINDING
9209 D









66426

rollen isolatieband
4,5 meter



DUROLIN

Fibre abrasive


Braida pads

Reinigungsvlies

Nota abrasiva



4460 AD Goes (Holland) Tel. 0113-248248

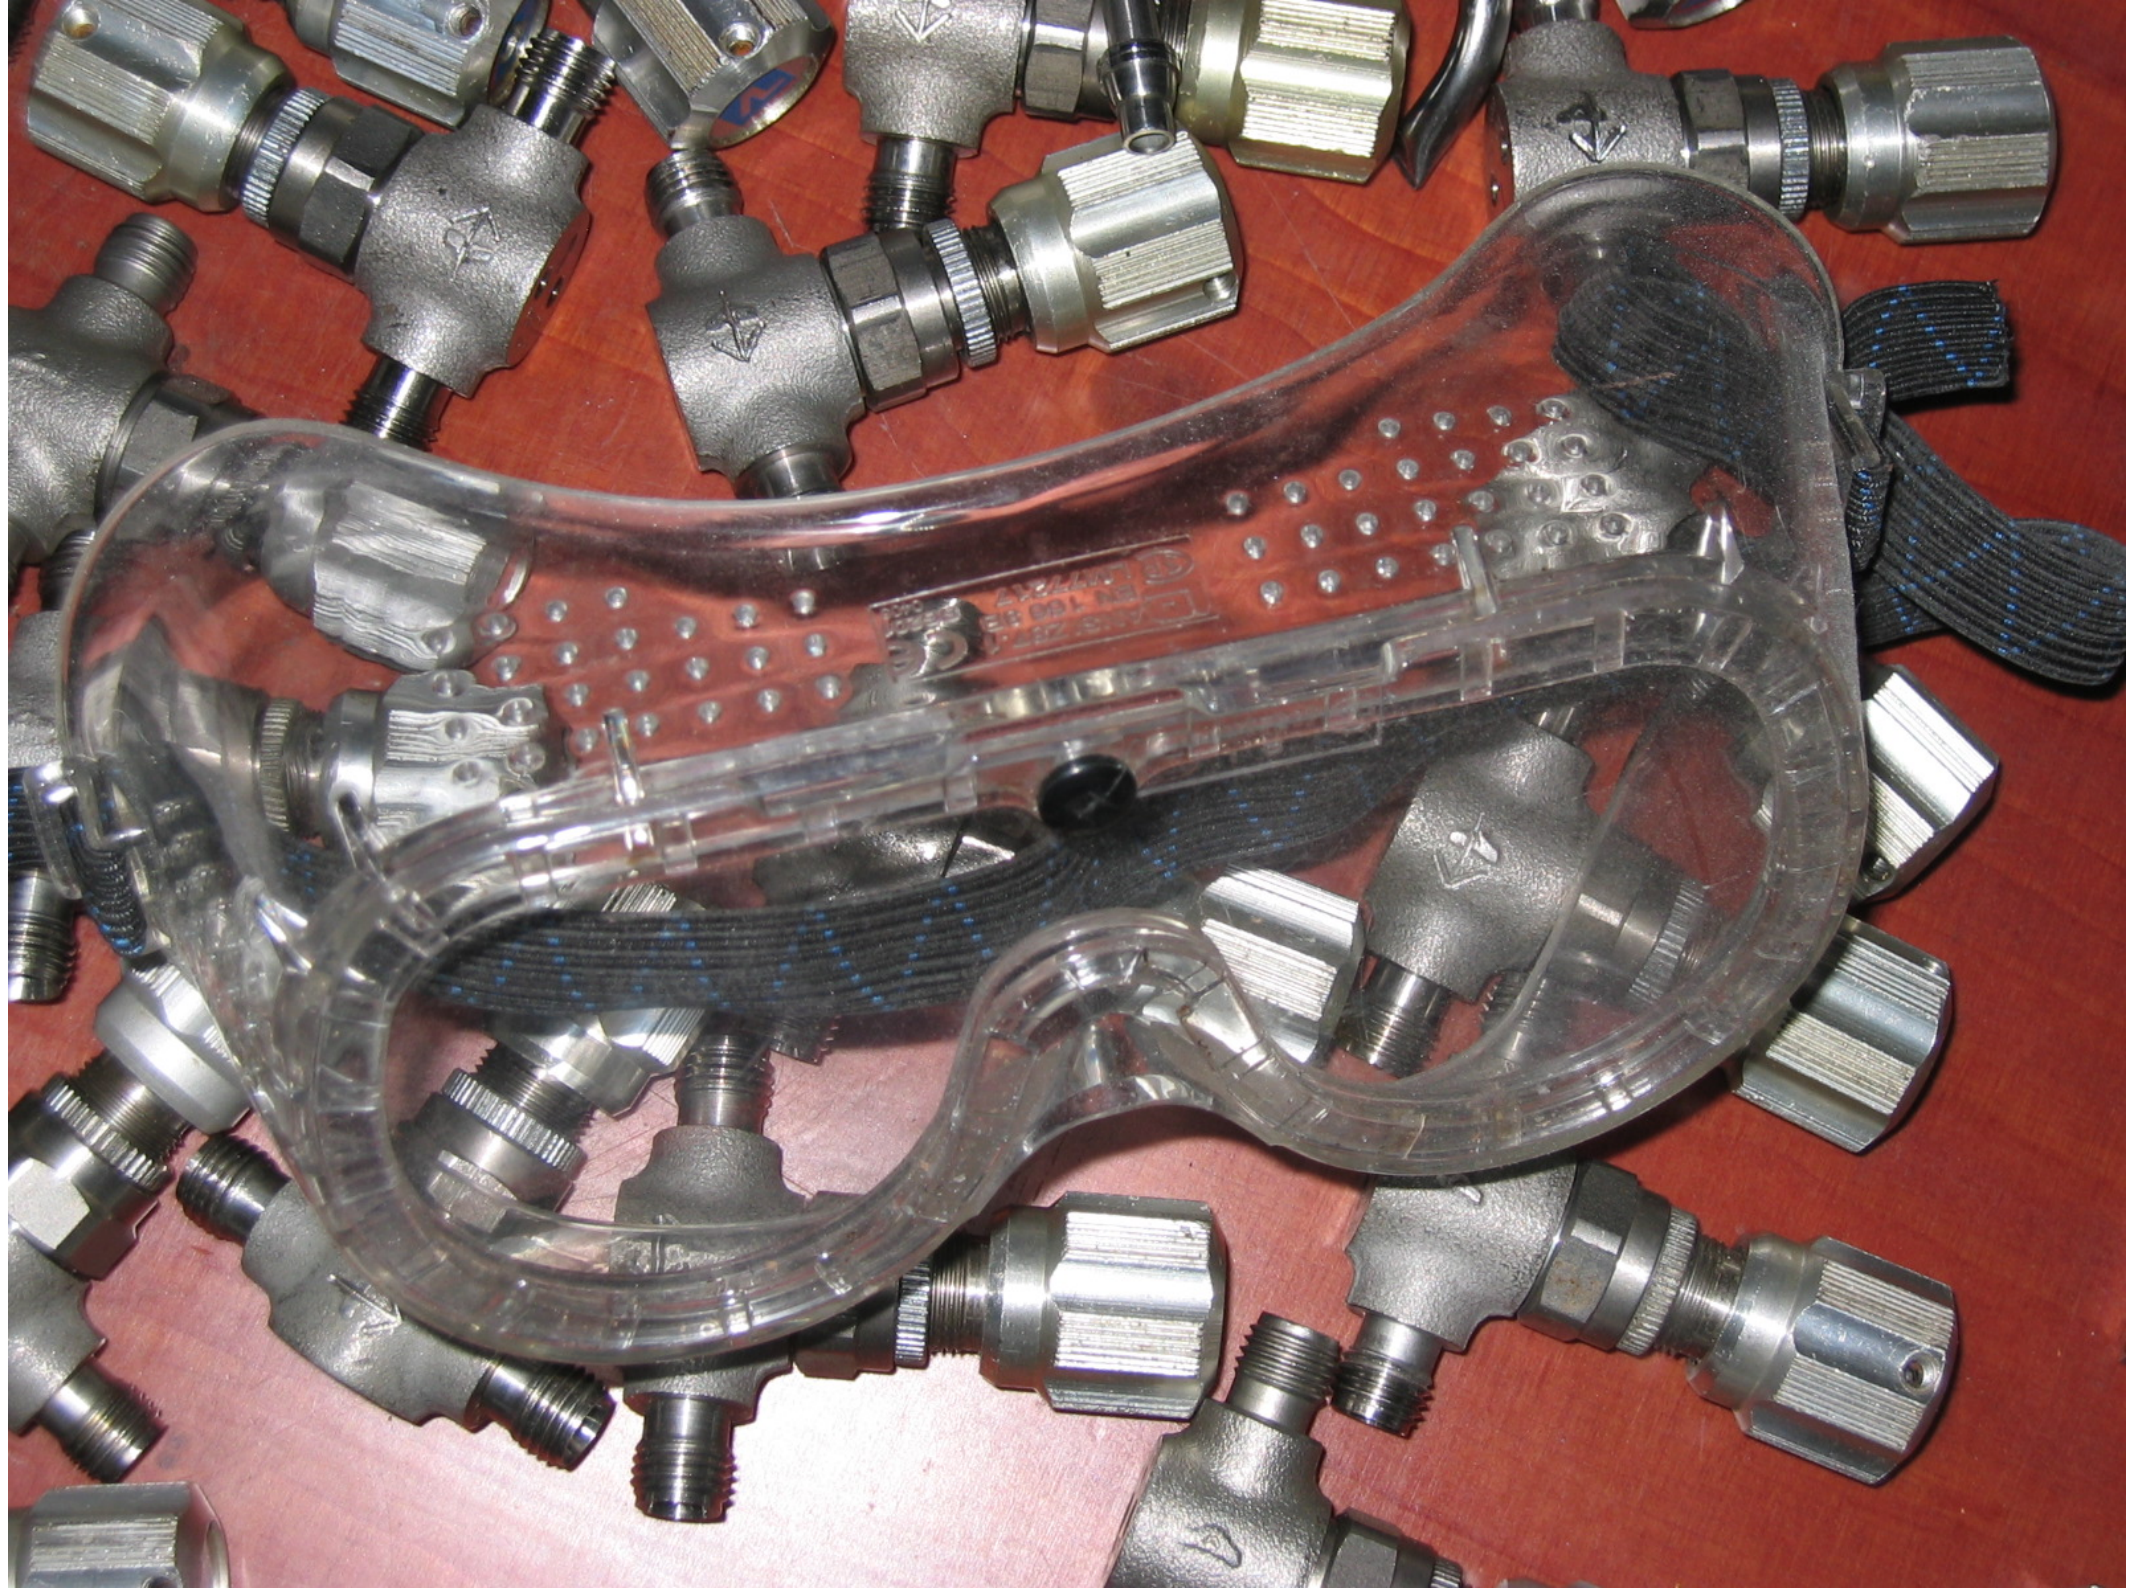



BARATTOLINE
SANTAMONTANA
GranGelato

KOMBI METAL
24 ml

NOIR • BLACK

SAFETY WARNING
WEAR EYE
FACE AND BODY
PROTECTION
WHEN GRINDING

WHITE PETROLEUM JEL

SAFETY WARNING
WEAR EYE
FACE AND BODY
PROTECTION
WHEN GRINDING

+ 30% GRATIS









HHS 2000

Lubricant, resistant to high pressures and with high adhesive strength. Colour: transparent.



Optimum penetration into the treated part. Strong adhesion of the lubricant onto metal surfaces. For lubricating parts subjected to high pressures, impacts and vibrations. Long term action and corrosion protection. Resistant to water, salt water, many acids and alkalis. Temperature range from: -35°C to $+200^{\circ}\text{C}$. Shake can well before use. Spray from a distance of 20-30 cm.



Adolf Würth GmbH & Co. KG
D-74650 Künzelsau
Made in Germany


Container is under pressure. Protect against direct sunlight and temperatures of greater than $+50^{\circ}\text{C}$. After use, do not forcibly open and do not incinerate. Do not spray into flames or onto red-hot objects. Only discard when container is completely empty.

Flammable.

Keep out of reach of children!





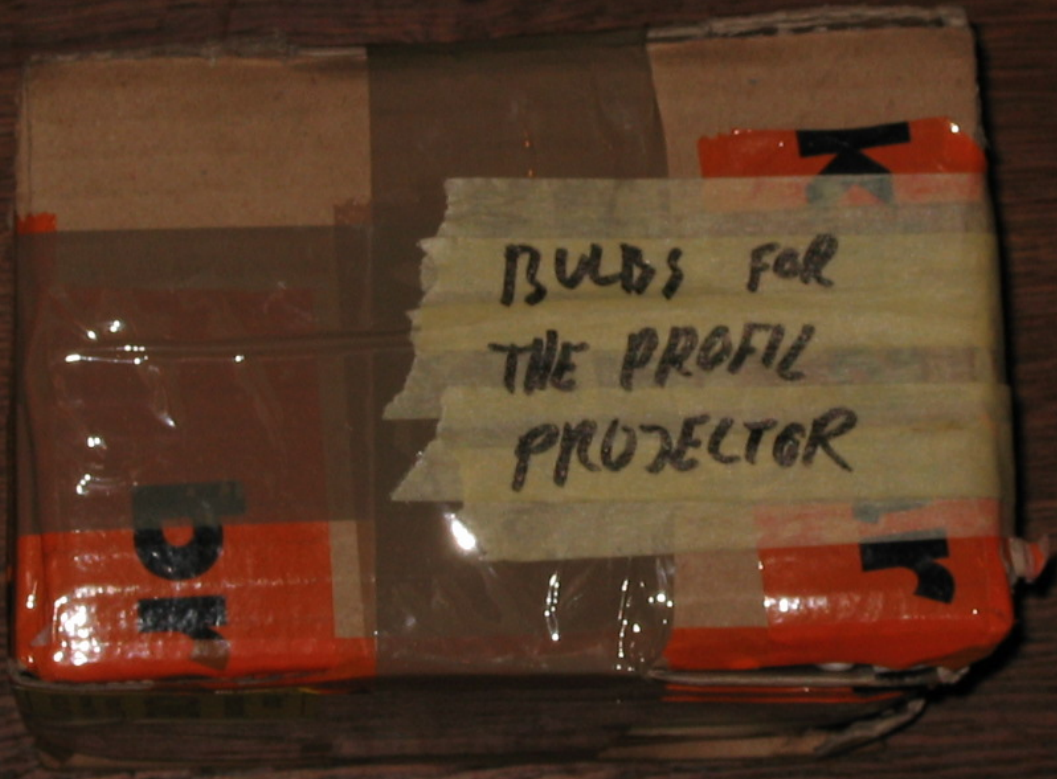

BULBS FOR
THE PROFIL
PROJECTOR

BULBS FOR
THE PROFIL
PROJECTOR









